

WIRED (BUS) ELECTRO-INSTALLATION



ELKO EP




We are traditional, innovative and purely Czech development manufacturer of electronic devices and we have been your partner in the field of electroinstallations for 27 years.

ELKO EP employs about 274 people, exports its products to more than sixty six countries, and has representatives in eleven foreign branches. Company of the Year of the Zlín Region, Visionary of the Year, Global Exporter of the Year, Participation in the Czech TOP 100, these are just some of the awards received. Still, we are not finished. We are constantly striving to move forward in the field of innovation and development. That's our primary concern.

Millions of relays, thousands of satisfied customers, hundreds of our own employees, twenty seven years of research, development and production, eleven foreign branches, one company. ELKO EP, innovative - a purely Czech company based in Holešov, where development, production, logistics, service and support go hand in hand. We primarily focus on developing and manufacturing systems for building automation in the residential, commercial and industrial sector, a wide range of Smart city facilities and the so-called Internet of Things (IoT).



Facts and stats

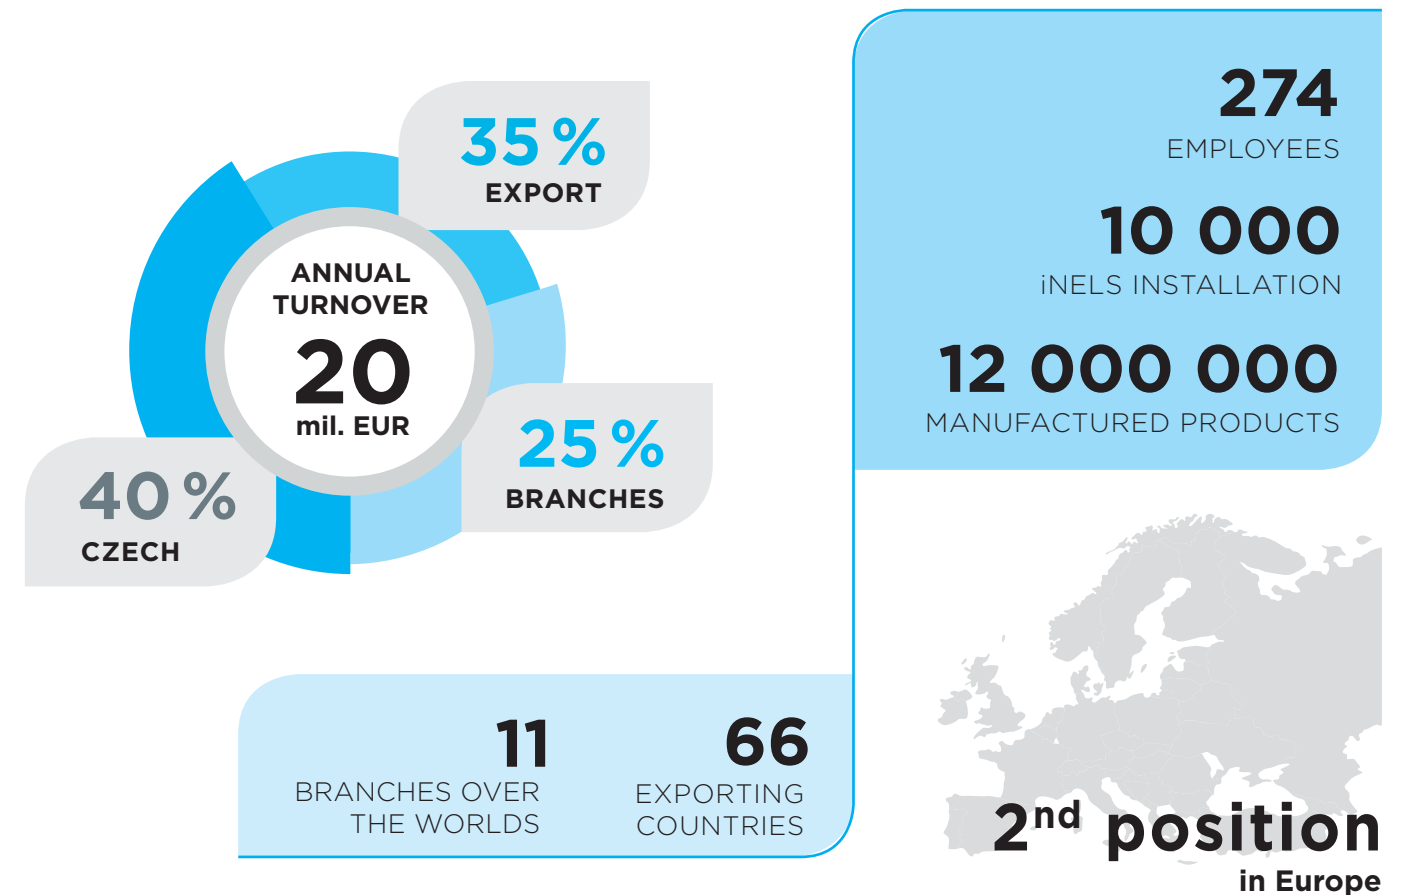

WE ARE



WIRELESS ELECTRICAL INSTALLATIONS

If you are going to renovate the house but, you do not want to interfere with the existing wiring, take advantage of our wireless solutions. The communication between the components works wirelessly at 868-916 MHz, using our unique RFIO and RFIO² protocols. Both are proprietary ELKO EP wireless protocols, which have a completely unique structure.
















The advantage of this system, compared to the bus solution, is the possibility of gradually extending and adding individual components to the electrical installation. You can easily control lighting, heating, switching appliances and shading techniques, or have everything secured by detectors. Variable control brings countless possibilities - from key fobs to flat panel controllers on the wall that can be placed anywhere, to the application on your smartphone.

Supported technologies

- | | |
|-------------------------------|--------------------------|
| ✗ Control using the TV | ✓ Touch panel |
| ✓ Tablet | ✓ Control via Smartphone |
| ✓ PC / Laptop | ✓ Detectors |
| ✗ Music playback | ✓ Wireless switch |
| ✓ Video cameras | ✓ Heating regulation |
| ✓ Weather station | ✓ Controlling blinds |
| ✓ Door communicator | ✓ Dimming lights |
| ✗ Controlling home appliances | ✓ Controlling appliances |

Price of installation: 

Energy savings: 

 Controlling appliances	 Dimming lights	 Controlling blinds	 Heating regulation	 Group controller	 Detectors	 Smartphone Smart watches	 Touch panel
 Controlling household appliances	 Door communicator	 Weather station	 Video cameras (outdoor/indoor)	 Audio Zone (music playback)	 PC /Laptop	 Tablet	 Video Zone (controlling via TV)

BUS ELECTRICAL INSTALLATIONS

Are you building a new house? Then you should consider a BUS-based solution. A BUS in this sense is a data conductor that is distributed in the walls across the entire home. As opposed to a wireless solution, its advantage is range, because up to 18 x 550 m BUSes can be distributed in a single building.

Connection to a computer expands the scope of its available functions. This system may be expanded to include multimedia extensions and can connect third party devices (household appliances, A/C, etc.). Control and monitoring the system can be performed via PC, the Internet, telephone, tablet, etc. The system offers a wider range of applicable functions. A computer is used to set the parameters.

Supported technologies

- | | |
|-------------------------------|--------------------------|
| ✓ Control using the TV | ✓ Touch panel |
| ✓ Tablet | ✓ Control via Smartphone |
| ✓ PC / Laptop | ✓ Detectors |
| ✓ Music playback | ✓ Wireless switch |
| ✓ Video cameras | ✓ Heating regulation |
| ✓ Weather station | ✓ Controlling blinds |
| ✓ Door communicator | ✓ Dimming lights |
| ✓ Controlling home appliances | ✓ Controlling appliances |

Price of installation: 

Energy savings: 

The BUS electro installation iNELS BUS System is a unique solution for electrical installation in the implementation of new projects of houses, villas, apartment buildings, office buildings, hotels, restaurants, wellness centres or perhaps even warehouse or production hall.

The ability to deploy this solution in such a wide variety of different buildings with various purposes and uses lies in its modularity. Thanks to the modular design, the system is very flexible and allows on the one hand, a solution of single-purpose tasks such as control of lighting in restaurants, and on the other hand, solving complex control systems for heating, ventilation, cooling, lighting and shading of office buildings. A complete range of control units designed from glass for management of hotel rooms is in the market unique.

Thanks to its modularity is very easy to customize the size of the system and to that effect create a cost effective solution.

Smart homes and buildings are accompanied by three basic ideas, namely savings, comfort and safety, the first two ideas may at first glance contradict each other. However, the main objective of smart home or building equipped with the iNELS solution is to attain the optimum indoor environment while achieving the most efficient operation of all system.

In homes and buildings the optimal internal environment is very important because people nowadays spend up to 80% of their time inside buildings. It is also shown that indoor environments, where we talk about thermal comfort, lighting comfort and indoor air quality significantly affect the mood and the effectiveness of people.

The iNELS system allows connection of wide range of sensors (temperature, light intensity, carbon dioxide, humidity, and pressure) and detectors (movement, opening doors and windows, gas leakage, smoke, flooding) whose values are constantly evaluated. At the same time iNELS allows the connection of all the technologies that are installed in the building, which continued to significantly increase operational efficiency or comfort, for example; in the case of integrating the guest room management system with the receptionist Fidelio system, which automatically during check-in, sends the room requests for execution, a welcome scene (optimum temperature, comfortable lighting scene, music etc.).

What are the benefits of BUS controlling?

- Save energy by regulating lighting and heating properly
- Control of blinds, awnings, exterior or internal window shutters
- Dimming lights, lighting scenes
- control of appliances or electrical devices
- Control access gates, garage doors
- Logical and central functions (exit button, ...)
- Manual and automatic control mode
- Preventing undesirable opening of a window or a door
- Responding to the movement of people (authorized and unauthorized)
- Remote monitoring via smartphone, tablet or laptop
- Possibility to control via the iNELS Touch Panel 10"
- Integration of third-party devices (cameras, air conditioning, ...)



More systems can be controlled by iNELS:



Wall controller



Keychaing



Remote control



Touch panel



Smartphone



ITP – iNELS Touch panel

Intelligent Electro-installation

Overview of system units	8
Wired electro-installations	
CU3-01M, CU3-02M Central unit	14
CU3-03M Central unit	15
CU3-07M Central unit	16
PS3-100/iNELS Power supply	18
PS3-30/iNELS Power supply	20
MI3-02M External master BUS	21
MI3-02M/ETH External master BUS with Ethernet communication	22
BPS3-01M, BPS3-02M BUS separator from power supply	23
GSM3-01M GSM communicator	24
SA3-02M Switching Actuator, 2-channel	26
SA3-04M Switching Actuator, 4-channel	27
SA3-06M Switching Actuator, 6-channel	28
SA3-012M Switching Actuator, 12-channel	29
SA3-022M Switching Actuator, 22-channel	30
EA3-022M Switching Actuator, 22-channel	31
SA3-01B, SA3-02B Switching Actuators, 1-channel and 2-channel	32
JA3-02B/DC Shutter Actuator	33
JA3-018M Shutter Actuator, 18-channel	34
DA3-22M Universal dimming actuator, 2-channel	35
DA3-06M Dimmer Actuator, 6-channel	36
LBC3-02M Dimming actuator for electronic ballasts, 2-channel	37
RFDA-73M/RGB Dimming actuator for LED (RGB) strips, 3-channel	38
DCDA-33M Dimming actuator for LED sources, 3-channel	40
IM3-140M Binary input unit, 14-channel	41
IM3-20B, IM3-40B, IM3-80B Binary input units	42
TI3-10B, TI3-40B Temperature input, 1-channel and 4-channel	44
TI3-60M Temperature input, 6-channel	45
ADC3-60M Analog-digital converter	46
DAC3-04M Digital-analog converter	47
DAC3-04B Digital-analog converter	48
FA3-612M Fan Coil Control Actuator	49
EST3 Elko smart touch screen	50
GSB3-40, GSB3-60, GSB3-80 Glass switch button	52
GSB3-240, GSB3-260, GSB3-280 Glass switch button	54
WSB3-20, WSB3-20H Wall switch button	56
WSB3-40, WSB3-40H Wall switch button	57
WMR3-21 Wall card reader	58
GMR3-61 Glass wall card reader	59
IDRT3-1 Digital room thermo-regulator	60
	61
Lighting control	
EMDC-64M Gateway iNELS - DALI/DMX	62
DMD3-1 Combined detector	63
DLS3-1 Luminescence sensor	64

Hospitality Solution

CU3-04M Central unit	66
GSB3-220/S, GSB3-240/S, GSB3-260/S Glass switch button with symbols	68
GSP3-2100 Glass switch panel	70
GBP3-260 Glass bedside panel	71
GBP3-260 Accessories	72
GRT3-250 Glass room thermo-regulator	74
GCR3-211 Glass card holder	75
GCH3-231 Glass card holder	76
GDB3-210 Glass door bell	77
GCR3-11, GCR3-11/PRO Glass card reader	78
GDB3-10, GDB3-10/PRO Glass door bell	79
GCH3-31, GCH3-31/PRO Glass card holder	80
EHT3 Elko Hotel Touch screen	81
GRT3-50, GRT3-50/PRO Glass room thermo-regulator	82
GBP3-60, GBP3-60/PRO Glass bedside panel	83
GBP3-60 Accessories	84
GSB3-20/S, GSB3-40/S, GSB3-60/S, GSB3-20/PRO/S, GSB3-40/PRO/S, GSB3-60/PRO/S Glass switch button with symbols	86
GSP3-100, GSP3-100/PRO Glass switch panel	88

Building Management System

iNELS Niagara	90
---------------------	----

Multimedia

iTP 10" iNELS Touch Panel 10"	94
Connection Server	95
eLAN-IR-003	96
eLAN-RS485/232	97
LARA Radio	98
LARA Intercom	99
Accessories LARA	101

Application iNELS Home Control

iHC	102
-----------	-----

Accessories iNELS

TELVA 230 V, TELVA 24 V Thermodrive	104
AN-I, AN-E Antenna	104
TC, TZ, Pt100 Thermo sensors	105

Loadability of contacts	106
Installation possibilities	108
Dimensions	110

System units



CU3-01M
Central unit



CU3-02M
Central unit



CU3-03M
Central unit



CU3-07M
Central unit

Switching actuators



BPS3-01M
BPS3-02M
BUS separator from
power supply



GSM3-01M
GSM communicator



SA3-02M
Switching actuator,
2-channel



SA3-04M
Switching actuator,
4-channel

Dimming actuators



SA3-02B
Switching actuator,
2-channel



JA3-02B/DC
Shutter actuator



JA3-018M
Shutter Actuator,
18-channel



DA3-22M
Universal dimming actuator,
2-channel

Converters



ADC3-60M
Analog-digital converter



DAC3-04M
Digital-analog converter



DAC3-04B
Digital-analog converter



FA3-612M
Fan Coil Control Actuator

Input units



IM3-20B
Binary input units



IM3-40B
Binary input units



IM3-80B
Binary input units



IM3-140M
Binary input unit,
14-channel



PS3-100/iNELS
Power supply



PS3-30/iNELS
Power supply



MI3-02M
External master



MI3-02M/ETH
External master BUS with
Ethernet communication



SA3-06M
Switching actuator,
6-channel



SA3-012M
Switching actuator,
12-channel



SA3-022M
Switching Actuator,
22-channel



EA3-022M
Switching Actuator,
22-channel



DA3-06M
Dimmer Actuator,
6-channel



LBC3-02M
Dimming actuator for
electronic ballasts,
2-channel



DCDA-33M
Dimming actuator for LED
sources, 3-channel



RFDA-73M/RGB
Dimming actuator for LED
(RGB) strips, 3-channel

Lighting control



EMDC-64M
Gateway iNELS - DALI/DMX



DMD3-1
Combined motion and light
intensity detector



DLS3-1
Luminescence sensor



TI3-10B
Temperature input,
1-channel



TI3-40B
Temperature input,
4-channel




TI3-60M
Temperature input,
6-channel

Wall units and controllers




EST3
Elko smart touch screen



GSB3-40, GSB3-240
Glass switch button



GSB3-60, GSB3-260
Glass switch button



GSB3-80, GSB3-280
Glass switch button




IDRT3-1
Digital room thermo-regulator


Hotel solutions



CU3-04M
Central unit



GCR3-11, GCR3-211
GCR3-11/PRO
Glass card reader



GDB3-10, GDB3-210
GDB3-10/PRO
Glass door bell



GBP3-60/xL/2F, GBP3-260/xL/2F
GBP3-60/PRO/xL/2F
Glass bedside panel, left



GBP3-60/xR/2F, GBP3-260/xR/2F
GBP3-60/PRO/xR/2F
Glass bedside panel, right



GBP3-60/xL/1F, GBP3-260/xL/1F
GBP3-60/PRO/xL/1F
Glass bedside panel, left



GBP3-60/xR/1F, GBP3-260/xR/1F
GBP3-60/PRO/xR/1F
Glass bedside panel, right



WSB3-20
WSB3-20H
Wall switch button



WSB3-40
WSB3-40H
Wall switch button



WMR3-21
Wall card reader



GMR3-61
Glass wall card reader



GCH3-31, GCH3-231
Glass card holder



EHT3
Elko Hotel Touch screen



GRT3-50, GRT3-250
Glass room thermo-regulator



GSB3-20/S, GSB3-220/S
GSB3-20/PRO/S
Glass switch button with symbols



GSB3-40/S, GSB3-240/S
GSB3-40/PRO/S
Glass switch button with symbols




GSB3-60/S, GSB3-260/S
GSB3-60/PRO/S
Glass switch button with symbols




GSP3-100, GSP3-2100
GSP3-100/PRO
Glass switch panel


Multimedia




iTP 10"
iNELS Touch Panel 10"



LARA Radio
Internet radio player



LARA Intercom
Multifunctional communications devices



Connection Server
Server for integration of third parties



eLAN-IR-003
Ethernet-IR transmitter



eLAN-RS485/232
Converter RS485/232-iNELS

iNELS Home Control application



iHC-MI
Application for iPhones



iHC-MA
Application for Android phones



iHC-TI
Application for iPads




iHC-TA
Application for Android tablets

Accessories



TELVA 230V
TELVA 24V
Thermodrives



AN-I
AN-E
Internal antenna
External antenna



TC
TZ
Pt100
Thermo sensors

Wired electro-installations

Smart home & building solutions





EAN code
CU3-01M: 8595188132220
CU3-02M: 8595188132398

Technical parameters		CU3-01M, CU3-02M
LED Indication		
Green LED RUN:	Flashing - communication with BUS, ON - no communication	
Red LED ERR:	Flashing - no project, ON - unit STOP	
OLED display		displays the current status and settings
Type:	color OLED	
Resolution:	128x128 / 1:1 aspect ratio	
Visible area:	26x26 mm	
Controlling:	using arrows	
The internal real-time clock:	accuracy: 1s/day at 23 °C	
Inputs		
Inputs:	4x NO or NC to GND (-) 2x analogue inputs 0÷30	
Outputs		
Output:	relay output- NO/GND	
Number of connected units (directly to the CU3-01M (02M):	max. 64 (2x32)	
Expansion possibilities external BUS master:	up to 576 units (CU3-01M (02M) and 8x MI3-02M)	
Communication		
BUS		
Maximum number of units:	max. 32 units to one BUS line	
Maximum cable length:	max. 500 m (depends on power loss)	
System BUS EBM		
Maximum cable length:	max. 500 m	
Number of connected ext. masters:	up to 8 (regards to increasing the cycle turns)	
Ethernet		
Connector:	RJ45 on the front panel	
Communication speed:	100 Mbps	
Indication of the Ethernet:	green - Ethernet communication yellow - Ethernet speed 100 Mbps	
The default IP address:	192.168.1.1 (the IP address can be changed in the menu using the display and buttons)	
Power supply		
Supply voltage / tolerance:	27 V DC, -20 / +10 %	
Dissipated power:	max. 3 W	
Rated current:	110 mA (at 27V DC)	
Operating conditions		
Working temperature:	-20 to +55 °C	
Storage temperature:	-25 to +70 °C	
Humidity:	max. 80%	
Degree of protection:	IP20 devices, IP40 with cover in the switchboard	
Overvoltage category:	II.	
Degree of pollution:	2	
Operating position:	any	
Installation:	to the switching board on the EN60715 DIN rail	
Design:	6-MODULE	
Terminal:	max. 2.5 mm²	
Dimensions and weight		
Dimensions:	90 x 105 x 65 mm	
Weights:	288 g	291 g

- CU3-01M and CU3-02M are central units’ of the iNELS system and mediators, between user software interface and controllers, units and actuators connected to the BUS.
- It’s possible to directly connect up to 2 lines of BUSes in to CU3-01M and CU3-02M, and on each BUS we can connect up to 32 iNELS3 units.
- The main difference between CU3-02M and CU3-01M is that CU3-02M is moreover equipped by RF module which enables communication with selected units from iNELS RF Control system.
- User’s project and retentive data are stored in a non-volatile internal memory hereby data are backed up without the supply voltage. Real time clock (RTC) backup for 10 days.
- Power supply controlling system - network voltage and the status of the backup battery.
- Possibility of setting time synchronization via NTP server.
- The RJ45 Ethernet port’s connector is located on the front panel of the unit, the transmission speed is 100 Mbps.
- For CU3-01M (02M) it is possible to use 4 potential-free inputs for connecting external controllers (buttons, switches, sensors, detectors, etc.) and 2 analog inputs 0 - 30V.
- CU3-01M (02M) comes with OLED display that shows the current status and enables settings (network settings, date, time, service) of the central unit CU3-01M (02M).
- Movement in the menu CU3-01M (02M) using arrows on the front panel.
- CU3-01M (02M) in 6-MODULE are designed for mounting into a switch-board on the EN60715 DIN rail.

iNELS RF Control interface for CU3-02M	
Communication protocol:	RF Touch Compatible
Transmitting frequency:	866 MHz / 868 MHz / 916 MHz
Signal transmission methods:	bidirectionally addressed message
Output for RF antenna:	SMA connector*
RF antenna:	1 dB (part of package)
Free space range:	up to 100 m

* Max Tightening Torque for antenna connector is 0.56 Nm.



EAN code
CU3-03M: 8595188132404

Technical parameters		CU3-03M
LED Indication		
Green LED RUN:	Indication of the operating state of the unit	
Red LED ERR:	Unit error indication	
TFT display		displays the current status and settings
Type:	color TFT	
Resolution:	240x240 / 1:1 aspect ratio	
Visible area:	26x26 mm	
Controlling:	using arrows	
The internal real-time clock:	accuracy: 1s/day at 23 °C	
Inputs		
Inputs:	8x DIN GS 12-230V AC / DC (over common COM terminal) 4x DIN voltage or current (with adjustable switching in current mode) 7x AIN / DIN voltage or current (with adjustable switching in current mode)	
Communication		
BUS		
Maximum number of units:	max. 32 units to one BUS line	
Maximum cable length:	max. 500 m (depends on power loss)	
3x Ethernet		
Connector:	RJ45 on the underside of the product	
Communication speed:	100 Mbps	
Indication of the Ethernet:	3x green - Ethernet communication 3x yellow - Ethernet speed 100 Mbps	
The default IP address (ETH3):	192.168.1.1 (the IP address can be changed in the menu using the display and buttons)	
DALI master:	up to 64 master units, max. 64 slave units	
Maximum number of units:	max. 64 mA (external source connection possible)	
Internal power supply:	Bus power supply	
Power supply		
Supply voltage / tolerance:	27 V DC, -20 / +10 %	
Rated current:	110 mA (at 27V DC)	
Operating conditions		
Working temperature:	-20 to +55 °C	
Storage temperature:	-25 to +70 °C	
Humidity:	max. 80%	
Degree of protection:	IP20 devices, IP40 with cover in the switchboard	
Overvoltage category:	II.	
Degree of pollution:	2	
Operating position:	any	
Installation:	to the switching board on the EN60715 DIN rail	
Design:	6-MODULE	
Terminal:	max. 2.5 mm²	
Dimensions and weight		
Dimensions:	90 x 105 x 65 mm	
Weights:	257 g	

- CU3-03M is a new, enhanced version of CU3-01M and CU3-02M.
- The new HW equipment allows communication with the DALI bus to connect up to 64 electronic ballasts (the internal power supply of the CU3-03M is capable of supplying connected ballasts up to a nominal value of 64 mA).
- RF Communication Interface for Controlling Wireless Receivers iNELS RF Control (the current list of supported receivers is available in the iNELS Installation Guide).
- The CU3-03M is equipped with three Ethernet ports, one for Ethernet (100 Mbps) connections and two for CU3-03M controllers.
- The CU3-03M has a TFT display that shows the current status and allows some basic unit parameters such as network setup, date, time, or service.
- The movement in the CU3-03M menu is possible by using the directional buttons on the front panel.
- CU3-03M in 6-MODULE are designed for mounting into a switchboard on the EN60715 DIN rail.

iNELS RF Control interface for CU3-03M	
Communication protocol:	RF Touch Compatible
Transmitting frequency:	866 MHz / 868 MHz / 916 MHz
Signal transmission methods:	bidirectionally addressed message
Output for RF antenna:	SMA connector*
RF antenna:	1 dB (part of package)
Free space range:	up to 100 m

DIN = digital input
AOUT = analogue output
AIN = analogue input
GS = galvanically isolated

* Max Tightening Torque for antenna connector is 0.56 Nm.



EAN code
mini CU3-07M: 8595188176262

Technical parameters		CU3-07M
Indication LED STATUS		
Green LED RUN:	Flashing - communication with BUS, ON - no communication	
Red LED ERR:	Flashing - no project, ON - unit STOP	
Communication		
BUS		
Indication (LED BUS):	green - unit status indication red - BUS fault indication	
Maximum number of units:	max. 32 units to one BUS line	
Maximum cable length:	max. 500 m (depends on power loss)	
BUS RS-485		
Indication (LED RS 485):	green - indication communication red - fault indication	
Maximum cable length:	max. 500 m	
Ethernet		
Connector:	RJ45	
Communication speed:	100 Mbps	
Indication of the Ethernet (LED ETH):	green - Ethernet communication yellow - Ethernet speed 100 Mbps	
The default IP address:	192.168.1.1	
Button RESET		
Restart:	short press	
Reset (Factory Reset):	press the button to apply power, release the button 10s after power is applied	
Power supply		
Supply voltage / tolerance:	27 V DC, -20 / +10 %	
Rated current:	55 mA (at 27 V DC)	
Operating conditions		
Operating temperature:	-20 .. +55 °C	
Storage temperature:	-25 .. +70 °C	
Humidity:	max. 80%	
Protection degree:	IP20 devices, IP40 with cover in the switchboard	
Overvoltage category:	II.	
Pollution degree:	2	
Operating position:	any	
Installation:	to the switching board on the EN60715 DIN rail	
Design:	1-MODULE	
Terminal:	max. 2.5 mm²	
Dimensions and weight		
Dimensions:	94 x 17.6 x 64 mm	
Weight:	72 g	

- CU3-07M is a small central unit of 1M size for managing small projects such as a hotel room, small apartment or cottage.
- Configuration is performed by software iNELS designer and manager iDM3, or is possible to use superior control by ASCII communication with CU3-07M.
- The unit can work as a stand-alone master for installation or as a slave for the superior CU3-0xM.
- The CU3-07M is equipped with one BUS branch to which up to 32 iNELS BUS units can be connected.
- For communication and configuration, the unit is equipped with an RJ45 connector with a 100Mbps Ethernet port.
- For ModBus communication, eg with Fancoils and Thermostats in the hotel room, the unit is equipped with RS-485 bus.
- CU3-07M in 1-MODULE version is designed for mounting into a switch-board, on DIN rail EN60715.

Installation BUS:

- Two-wired BUS with an arbitrary topology (not only to be as closed circle).
- With its own modulated communications on the DC voltage supply.
- One line of BUS allows you to connect up max. 32 units of iNELS3.
- The current load of one line is max. 1A. When connecting units which draw greater than 1A, BPS3-01M with 3A sampling can be used.
- Maximum length of the BUS is approximately 500 m (depends on the voltage drop).
- Recommended cable:
 - iNELS BUS Cable - Twisted pair of copper wires with size of AWG20 wire (diameter of 0.8 mm, cross-section of 0.5 mm²).

System BUS EBM:

- Used to connect the CU3-01M (02M) central unit with MI3-02M external masters, GSM communicator GSM3-01M or converter DALI/DMX EMDC-64M.
- EBM has strictly linear topology and wires are connected to terminals EBM + and EBM-, wires can not be interchanged.
- Max. length of the line of BUS is 500 m.
- The EBM BUS has to be terminated at both ends.
- This part adapted to be inserted between terminals is included into central units packages and it is necessary to insert between terminals EBM+ and EBM-.
- Reccomended cabling:
 - CAT5e UTP and higher, or FTP CAT5e and higher or STP CAT5e and higher.


- The configurations of units and the whole system are done via Ethernet, through configuration software - iNELS3 Designer & Manager (iDM3), which is designed for operating systems Windows 7, Windows 8 and Windows 10.
- The central unit features two communication protocols:
 - ELKONET - to communicate with Connection Server or directly with the application iHC.
 - ASCII - communication with third systems and integration with BMS (Building Management Systems), for example Niagara 4.
- Supported Software:
 - Parameterization, configuration, control and visualization: iNELS3 Designer & Manager (iDM3).
 - iRidium mobile
 - Niagara Frameworks
 - Promotic
- By means of iDM3, you can update firmware of central units and peripheral units connected by BUS.




EAN code
PS3-100/iNELS: 8595188176279

Indication LED


switching power supply works correctly
output voltage 27V is correct ($U_{OUT}>24V$)
output voltage 12V is correct
batteries are not recharged




switching power supply not working correctly
- UPS mode
output voltage 27V is correct ($U_{OUT}>24V$)
output voltage 12V is correct
batteries are not recharged




switching power supply works correctly
output voltage 27V is correct ($U_{OUT}>24V$)
output voltage 12V is correct
batteries are recharged




switching power supply not working correctly
- UPS mode
low output voltage 27V ($21V < U_{OUT} < 24V$)
output voltage 12V is correct
batteries are not recharged




switching power supply works correctly
low output voltage 27V ($21V < U_{OUT} < 24V$)
output voltage 12V is correct
batteries are not recharged



switching power supply works correctly
output voltage 27V is correct ($U_{OUT}>24V$)
low output voltage 12V (short-circuit, overload)
batteries are recharged




switching power supply is overload
low output voltage 27V ($U_{OUT} < 21V$)
low output voltage 12V
batteries are not recharged



- PS3-100/iNELS is a stabilized switching power supply, with the total power of 100 W.
- Used to supply central units and external master within intelligent electro-installation iNELS.
- Through BUS separators from the supply voltage BPS3-01M and BPS3-02M, it supplies supplies BUS lines from which iNELS peripheral units are also powered.
- Used in the instrumentation field.
- Fixed output voltage DC 27.6 V and DC 12.2 V, galvanically isolated from the mains.
- Power source of 27 V and 12 V have a common ground terminal GND.
- Electronic short circuit protection, high-capacity and thermal overload, over voltage.
- UPS functions - backup of output 24V and 12V on connected batteries.
- Recharging the batteries from 27 V source.
- Protection battery backup fuse - protection against short circuit and reverse polarity battery.
- Continuously adjustable maximum battery charging current.
- Indication of operating and fault conditions 6 LED diodes on the front panel of the power supply.
- 2 STATUS outputs with open collector for reporting operational status of the source.
- Source supplies power to the priority system iNELS, the remaining power is used for rechargeable batteries.
- When the battery is fully discharged, the battery is automatically disconnected from the load.
- PS3-100/iNELS in 6-MODULE version is designed for mounting into a switchboard, on DIN rail EN60715.

Example of connection

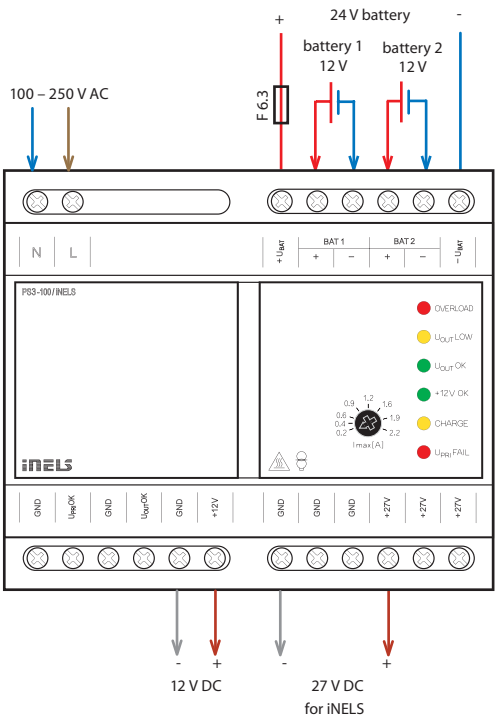

Technical parameters	PS3-100/iNELS
AC Input	
Power supply:	100 - 250 V AC / 50 - 60 Hz
Dissipated power:	max. 20 W
Power load (apparent / active):	max. 13 VA / 2 W
Power consumption at max. load (apparent / active):	max. 180 VA / 111 W
Protection:	- safety fuse T3.15 A inside the unit - electronic protection (short circuit current and thermal overload)
DC Input	
Power supply:	DC 24 V (two 12V batteries in series)
Protection:	-safety fuse F6.3 A external - electronic protection against current overload
Terminals for connecting the battery:	- each battery separately - separately routed extreme terminals (24)
Automatic disconnect the battery:	- for the battery voltage <21 V - when exceeding discharge current 4.2 A
Outputs	
Output voltage 1:	27.6 V
Max. capacity:	3.6 A
Output voltage 2:	12.2 V
Max. capacity:	0.35 A
The overall efficiency of resources:	about 88 %
Time delay after connecting to the AC network:	max 1 s
Max. charging current:	adjustable from 0.2 to 2.2 A
LED Signalization	
Output voltage 27 V OK ($U_{OUT} > 24 V$):	green LED $U_{OUT} OK$
Switch. power supply does not work (does not oscillate):	flashing red LED $U_{PRI} FAIL$ (if a battery is connected)
Low output voltage ($21 V < U_{OUT} < 24V$):	yellow LED $U_{OUT} LOW$
Output voltage 12 V OK ($U > 11 V$):	green LED + 12 V OK
Overloading the power supply ($U_{OUT} < 21 V$):	red LED OVERLOAD
Charging the battery (charging current > 50mA):	yellow LED CHARGE
Output status	
STATUS output 1 ($U_{PRI} OK$):	closed, when power supply works (not blinking LED $U_{PRI} FAIL$)
STATUS output 2 ($U_{OUT} OK$):	closed, if $U_{OUT} > 21 V$ (not lit red LED OVERLOAD)
Output type:	open collector current limited
Max. connectable voltage:	50 V DC
Max. current output:	50 mA
Voltage drop on the switch max:	at 10 mA ... 140 mV at 30 mA ... 400 mV at 50 mA ... 700 mV
Other Data	
Electric strength AC input - output:	4 kV
The connection terminals:	row
Cable size (mm ²):	max. 1 x 2.5, max. 2 x 1.5 (swith sleeve max 1 x 1.5)
Operating temperature:	-20 °C ... +55 °C
Storage temperature:	-30 °C ... +70 °C
Working humidity:	20 ... 90 % RH
Cover:	IP20 device, IP40 mounting in the switchboard
Overvoltage category:	III.
Degree of pollution:	2
Working position:	arbitrary, vertical is optimum
Installation:	on the DIN rail EN60715
Execution:	6-MODULE
Dimensions:	90 x 105 x 65 mm
Weight:	401 g
Related standards:	general: EN61204, safety: EN61204-7, EMC: EN61204-3

Description of device functions

- The device consists of several functional blocks.
- The basic part is 100 W power supply with 2 output voltage levels.
 - Voltage of 27.6 V is used to supply the system iNELS and to recharge the batteries.
 - Voltage of 12.2 V is for power as intrusion detectors (ESAS) or EFAS.
 - Both voltages are available without interruption during power AC power supply (UPS function) - assuming they are connected to a backup battery.
- Other parts of the source circuits are battery backup and recharge, which provide switching mode connection, charging and disconnecting the battery.
 - When in the backup mode, the battery is completely discharged, the circuit is immediately switched off to avoid deep discharge. The maximum discharge current is also guarded - when exceeded, the batteries are again disconnected.
 - If the switched source is working (oscillating), and its output voltage are greater than 26.9 V, the backup batters are charged by the current, and the maximum value is set by trimmer on the panel source.
 - When charging the yellow LED CHARGE illuminates. The source first feeds the iNELS system, and the remaining capacity of up to 100 W only recharges the battery.
 - If the output is high, this disconnects the charge (the yellow LED CHARGE switches off).
 - Upon further increasing, the load further decreases the voltage source and the load current also flows from the battery (power supply and battery power to the load together).
 - If the source is disconnected from the AC network (does not oscillate), and you connect batteries now, the batters remain disconnected and power outputs are without power. To activate, the source must be connected to the power supply.
- The last part of the unit are signaling circuits and status outputs.
 - STATUS outputs (see technical data) are equipped with current limiting, so they can switch signaling components directly without external resistors (e.g. LED, optocouplers or relay coil)
 - The LED signaling function is given in the table of technical parameters and illustratively described in seven case studies.




EAN code
PS3-30/iNELS: 8595188176279

Technical parameters		PS3-30/iNELS
AC Input		
Power supply:	100 - 250 V AC / 50 - 60 Hz	
Dissipated power:	max. 6.5 W	
Power load (apparent / active):	max. 10 VA / 1.5 W	
Power consumption at max. load (apparent / active):	max. 54 VA / 33 W	
Protection:	fuse T2A inside the unit	
Outputs		
Output voltage:	27 V	
Max. capacity:	1 A	
The overall efficiency of resources:	> 82 %	
Time delay after connecting to the AC network:	max. 5 s	
Indication LED		
Green LED POWER:	power indication	
Green LED BUS:	unit status indication	
Other Data		
Electric strength AC input - output BUS:	4 kV	
The connection terminals:	row	
Cable size (mm²):	max. 1 x 2.5, max. 2 x 1.5 (swith sleeve max 1 x 1.5)	
Operating temperature:	-20 °C ... +55 °C	
Storage temperature:	-30 °C ... +70 °C	
Working humidity:	20 ... 90 % RH	
Cover:	IP20 device, IP40 mounting in the switchboard	
Overvoltage category:	III.	
Degree of pollution:	2	
Working position:	rbitary, vertical is optimum	
Installation:	on the DIN rail EN60715	
Execution:	3-MODULE	
Dimensions:	90 x 52 x 65 mm	
Weight:	160 g	
Related standards:	general: EN61204, safety: EN61204-7, EMC: EN61204-3	

- PS3-30/iNELS is a stabilized switching power supply, with the total power of 30 W.
- Used to supply central units and external master within intelligent electro-installation iNELS.
- Electronic short circuit protection, high-capacity and thermal over-load, over voltage.
- Part of the power supply is an internally integrated bus separator BPS3-02M for supplying one BUS branch, from which the iNELS peripheral units are further supplied.
- PS3-30/iNELS in 3-MODULE version is designed for mounting into a switchboard, on DIN rail EN60715.

Connection

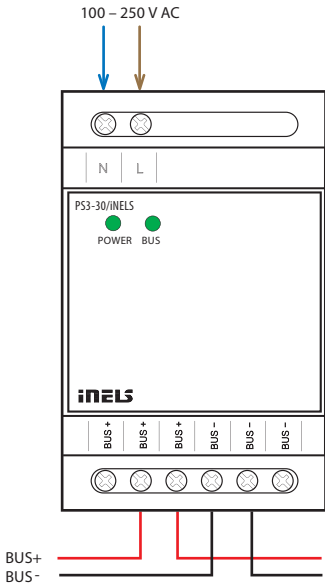


EAN code
MI3-02M: 8595188132411

Technical parameters		MI3-02M
Outputs		
Number of connected units:	max. 64 (2x32)	
Communication		
Installation BUS:	2x BUS for connection of peripheral units	
Data BUS:	for communication with central unit	
Unit status indication:	green LED	
BUS fault indication:	red LED	
Length of BUS wire:	max. 2x 500 m	
Length of BUS EBM wire:	max. 500 m	
Power supply		
Supply voltage / tolerance:	27 V DC, -20 / +10 %	
Dissipated power:	max. 1 W	
Rated current:	25 mA (at 27V DC)	
Operating conditions		
Operating temperature:	-20 .. +55 °C	
Storage temperature:	-25 .. +70 °C	
Humidity:	max. 80 %	
Protection degree:	IP20 device, IP40 mounting in the switchboard	
Overvoltage category:	II.	
Pollution degree:	2	
Operating position:	any	
Installation:	in a switchboard on DIN rail EN 60715	
Design:	1-MODULE	
Terminal:	max. 2.5 mm²	
Dimensions and weight		
Dimensions:	90 x 17.6 x 64 mm	
Weight:	58 g	

- External master MI3-02M provides expansion of the amount of units iNELS3 connected to the central unit CU3-01M or CU3-02M of two other lines of BUS (i.e. about 2x32 peripheral units).
- Through the system BUS EBM, it is possible to connect to one central unit up to 8 external masters MI3-02M.
- Combining central unit CU3-01M (02M) and 8 external masters MI3-02M we can reach maximum capacity of iNELS system up to 576 peripheral units.
- If you require an extended system then it is possible to use communication of up to 8 central units with Connection server using ELKONET protocol, eventually the integration of more central units into BMS via ASCII protocol.
- MI3-02M have marked on the front panel of the unique hardware address. This address belongs to the line BUS1. Hardware address of BUS2 line is always one value higher than for BUS1.
- MI3 units are supplied from PS3-100/iNELS.
- To power the lines BUS, it is necessary to use a BUS separator BPS3-02M or BPS3-01M (supply only one line).
- Status signaling of each BUS (operation, fault) is indicated by two-color LEDs on the front panel of the module.
- The last MI2-02M connected to the EBM BUS must be closed with a 120 Ω termination resistor. This part adapted to be inserted between terminals is included into central units packages and it is necessary to insert between terminals EBM+ and EBM-.
- MI3-02M in 1-MODULE version is designed for mounting into a switchboard, on DIN rail EN60715.

Connection

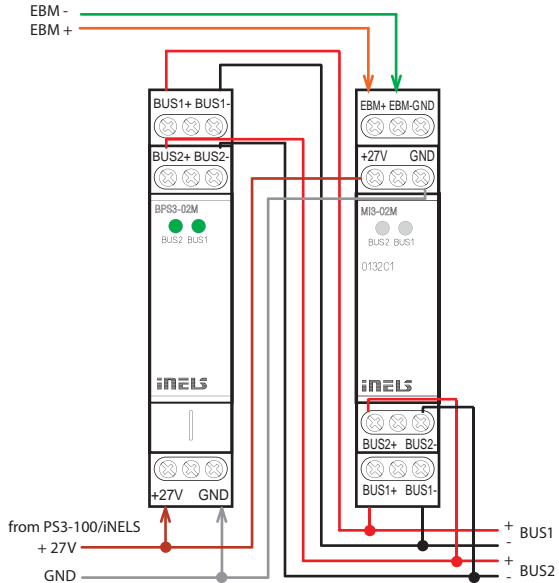



EAN code
MI3-02M/ETH: 8595188134897


Technical parameters MI3-02M/ETH	
Indication LED	
Power indication:	green LED Un
Unit status indication	
BUS / EBM:	green LED BUS1, BUS2 / EBM
BUS / EBM bus fault indication:	red LED BUS1, BUS2 / EBM
RF communication indication:	red LED RF STATUS
Communication	
BUS with integrated BPS3	
Max. BUS output current:	2x 1A
Maximum number of units:	max. 2x 32 units
Maximum cable length:	max. 500 m (depends on power loss)
2x konektor ETH	Connection to CU3-03M or to another external MI3-02M / ETH master
Connectors:	RJ45 on the underside of the product
Communication speed:	100 Mbps
Ethernet status indication:	2x green - Communication Ethernet 2x yellow – Speed Ethernet 100 Mbps
Power supply	
Supply voltage / tolerance:	27 V DC, -20 / +10 %
Rated current without output load:	max. 75mA (at 27 V DC)
Operating conditions	
Operating temperature:	-20 .. +55 °C
Storage temperature:	-25 .. +70 °C
Humidity:	max. 80%
Protection degree:	IP20 device, IP40 mounting in the switchboard
Overvoltage category:	II.
Pollution degree:	2
Operating position:	any
Installation:	in a switchboard on DIN rail EN 60715
Design:	3-MODULE
Terminal:	max. 2.5 mm² / 1.5 mm² with sleeve
Dimensions and weight	
Dimensions:	90 x 52 x 65 mm
Weight:	200 g

iNELS RF Control interface for MI3-02M/EHT	
Communication protocol:	RF Touch Compatible
Transmitting frequency:	866 MHz / 868 MHz / 916 MHz
Signal transmission methods:	bidirectionally addressed message
Output for RF antenna:	SMA connector*
RF antenna:	1 dB (part of package)
Free space range:	up to 100m

* Max Tightening Torque for antenna connector is 0.56 Nm.

- The external master MI3-02M/ETH allows two additional BUS branches (i.e., 2x 32 peripheral units) to extend the number of connected iNELS3 peripheral units to the CU3-01M, CU3-02M or CU3-03M central unit.
- Part of the External Master MI3-02M/ETH is also a bus separator (BPS3), which supplies the two BUS connected to this master with 2x1A current.
- The unit can communicate via the EBM system bus with the CU3-01M, CU3-02M or CU3-03M (ETH) Ethernet interface.
- The advantage of using Ethernet communication is faster data transfer between masters and faster system response.
- ETH ports are used to connect up to 8 external MI3-02M/ETH master units, where one port is an input port, the other outputs and serves to interconnect units. It is possible to connect CU3-03M and up to 8 MI3-02M/ETH into a "circle" or it is possible to interconnect the EBM system bus with the CU3-01M, CU3-02M central unit and extend this system up to 8 external MI3-02M/ETH master units.
- The MI3-02M/ETH is powered from PS3-100/iNELS.
- The MI3-02M/ETH is equipped with an RF module for communication with selected units of iNELS RF Control.
- The status of each BUS (Run, Error) is signalled by the appropriate colour LED on the front panel of the unit.
- If this is the last unit on the EBM system bus, it is necessary to terminate the line with a resistor with a nominal resistor value of 120Ω. This element, which is designed for easy insertion into the terminals, is part of a package of central units and external masters and is inserted between the EBM + and EBM- terminals.
- MI3-02M/ETH in 3-MODULE version is designed for mounting into a switchboard, on DIN rail EN60715.

Connection

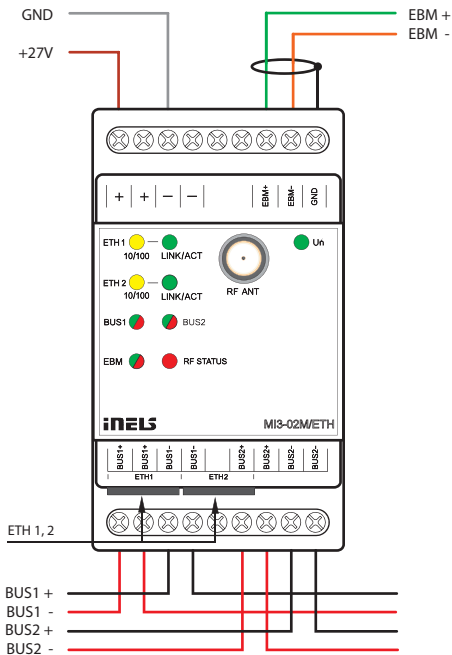


EAN code
BPS3-01M: 8595188132442
BPS3-02M: 8595188132435

Technical parameters		BPS3-01M	BPS3-02M
Outputs			
Maximum capacity:	3A		2x 1A
Communication			
Installation BUS:	1x BUS		2x BUS
Power supply			
Supply voltage / tolerance:	27 V DC, -20 / +10 %		
Dissipated power:	max. 0.5 W		
Rated current:	max. 8 mA		max. 15 mA
Status indication voltage on terminals:	1 x green LED		2 x green LED
Connection			
Terminals:	max. 2.5 mm ² /1.5 mm ² with sleeve		
Operating conditions			
Operating temperature:	-20 .. +55 °C		
Storage temperature:	-30 .. +70 °C		
Protection degree:	IP20 device, IP40 mouting in to the switchboard		
Overvoltage category:	II.		
Pollution degree:	2		
Operating position:	any		
Installation:	in a switchboard on DIN rail EN 60715		
Design:	1-MODULE		
Dimensions and weight			
Dimensions:	90 x 17.6 x 64 mm		
Weight:	70 g		85 g

- Units BPS3-01M and BPS3-02M serve for impedance separation of BUS from supply voltage power.
- BUS separator BPS3 or BPS3-01M-02M is required for each type CU3-01M (02M) central unit and external master MI3-02M.
- BPS3-01M allows you to connect one BUS with max. load 3 A.
- BPS3-02M allows you to connect two separate BUS1 and BUS2 with max. load 1 A for each line.
- Outputs are equipped with overcurrent and overvoltage protection.
- Indication of output voltage outputs BUS LED.
- BPS3-01M and BPS3-02M in 1-MODULE version is designed for mounting into a switchboard, on DIN rail EN60715.

Connection

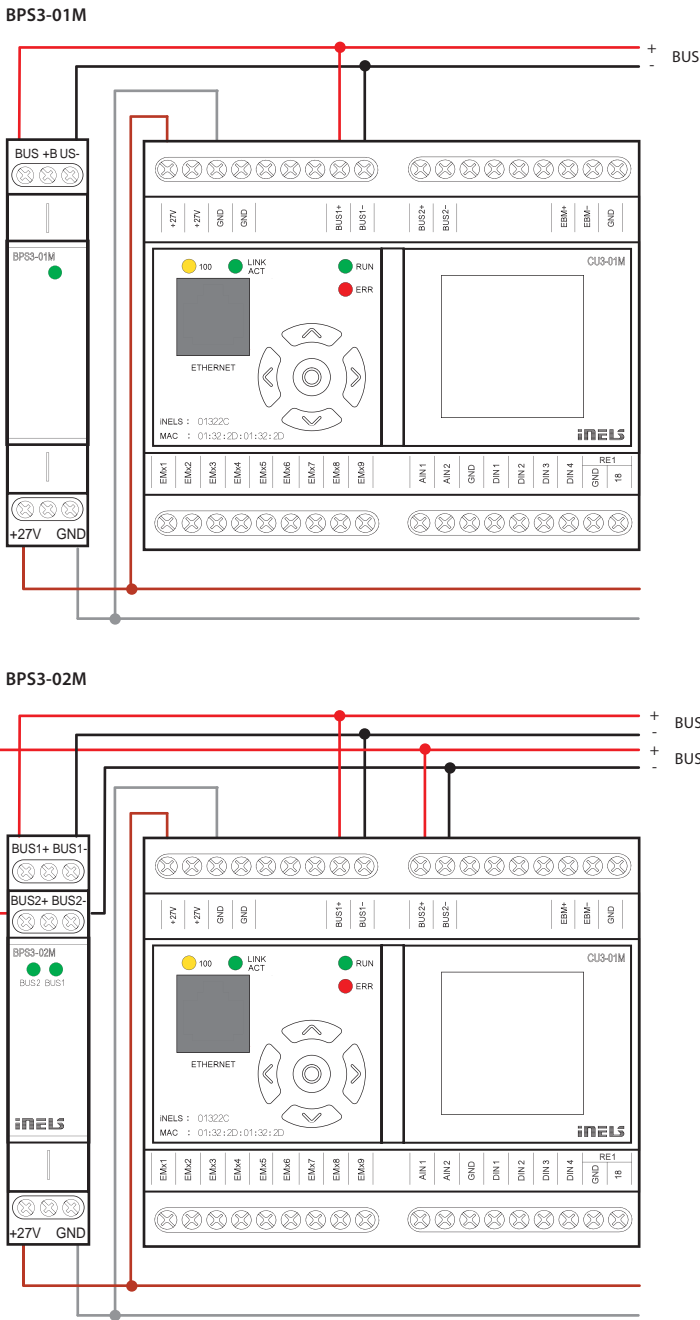





EAN code
GSM3-01M: 8595188132428

Technical parameters		GSM3-01M
Communication		
Communication interface:	system BUS EBM	
GSM network (Quad-band):	850/900/1800/1900 MHz	
Transmitter output power:	2 W for GSM 900, 1 W for GSM 1800	
Number of supported calls:	8 incoming, 8 outgoing	
Number of informative SMS:	32 incoming, 32 outgoing	
Number of telephone numbers:	up to 512	
LED indication - operation state / fault in BUS:	LED STATUS	
Output for antenna:	SMA connector*	
Power supply		
Supply voltage / tolerance:	27 V DC, -20 / +10 %	
Rated current:	250 mA (at 27V DC) / max. 1 A	
Supply voltage indication:	green LED Un	
Connection		
Terminals:	max. 2.5 mm²/1.5 mm² with sleeve	
Operating conditions		
Operating temperature:	-20 to +55 °C	
Storing temperature:	-30 to +70 °C	
Protection degree:	IP20 devices, IP40 with cover in switchboard	
Overvoltage category:	II.	
Pollution degree:	2	
Operation position:	any	
Installation:	to DIN rail EN 60715	
Design:	3-MODULE	
Dimensions and weight		
Dimensions:	90 x 52 x 65 mm	
Weight:	132 g	

* Max Tightening Torque for antenna connector is 0.56 Nm.

- It serves for communication with the iNELS system via commands sent in short SMS messages from mobile phone GSM.
- With the GSM3-01M and a smartphone, it is possible by SMS message or a call to control the iNELS system or obtain information on its status and current events.
- By means of the software iDM3, you can use up to 8 incoming calls, 8 outgoing calls, 32 incoming SMS messages and 32 outgoing SMS messages.
- For SMS messaging, the message length is limited to 32 characters, and for each message, you can set up to eight telephone numbers. In total, it is possible in iDM3 to use up to 512 telephone numbers.
- One telephone number can be set for each incoming and outgoing call.
- The maximum length of an incoming call is around 30s, and then the GSM3-01M hangs up. The user can set the length of outgoing calls in the software iDM3.
- GSM3-01M can be used for informing users about any system status, e.g. in the event of a fault in some technology or building interference.
- Operating range is 850, 900 as well as 1800, 1900 MHz (quad-band).
- SIM card is inserted into the unit from the front panel.
- The MINI USB connector on the front panel is used for servicing, but configuration of telephone numbers, SMS messages and calls is done from the software iDM3.
- GSM3-01M connects to the central unit CU3-01M (02M) via the EBM system BUS (terminals EBM+ and EBM-).
- In case it involves the last unit on the system BUS EBM, it is necessary to terminate the wire with a resistor with rated resistance of 120Ω. This part adapted to be inserted between terminals is included into central units packages and it is necessary to insert between terminals EBM+ and EBM-.
- The package includes is an external magnetic antenna (cable 3m, 5db gain), which is connected to the connector RSMA (F) on the front panel.
- GSM3-01M in 3-MODULE version is designed for mounting into a switchboard, on DIN rail EN60715.

Connection

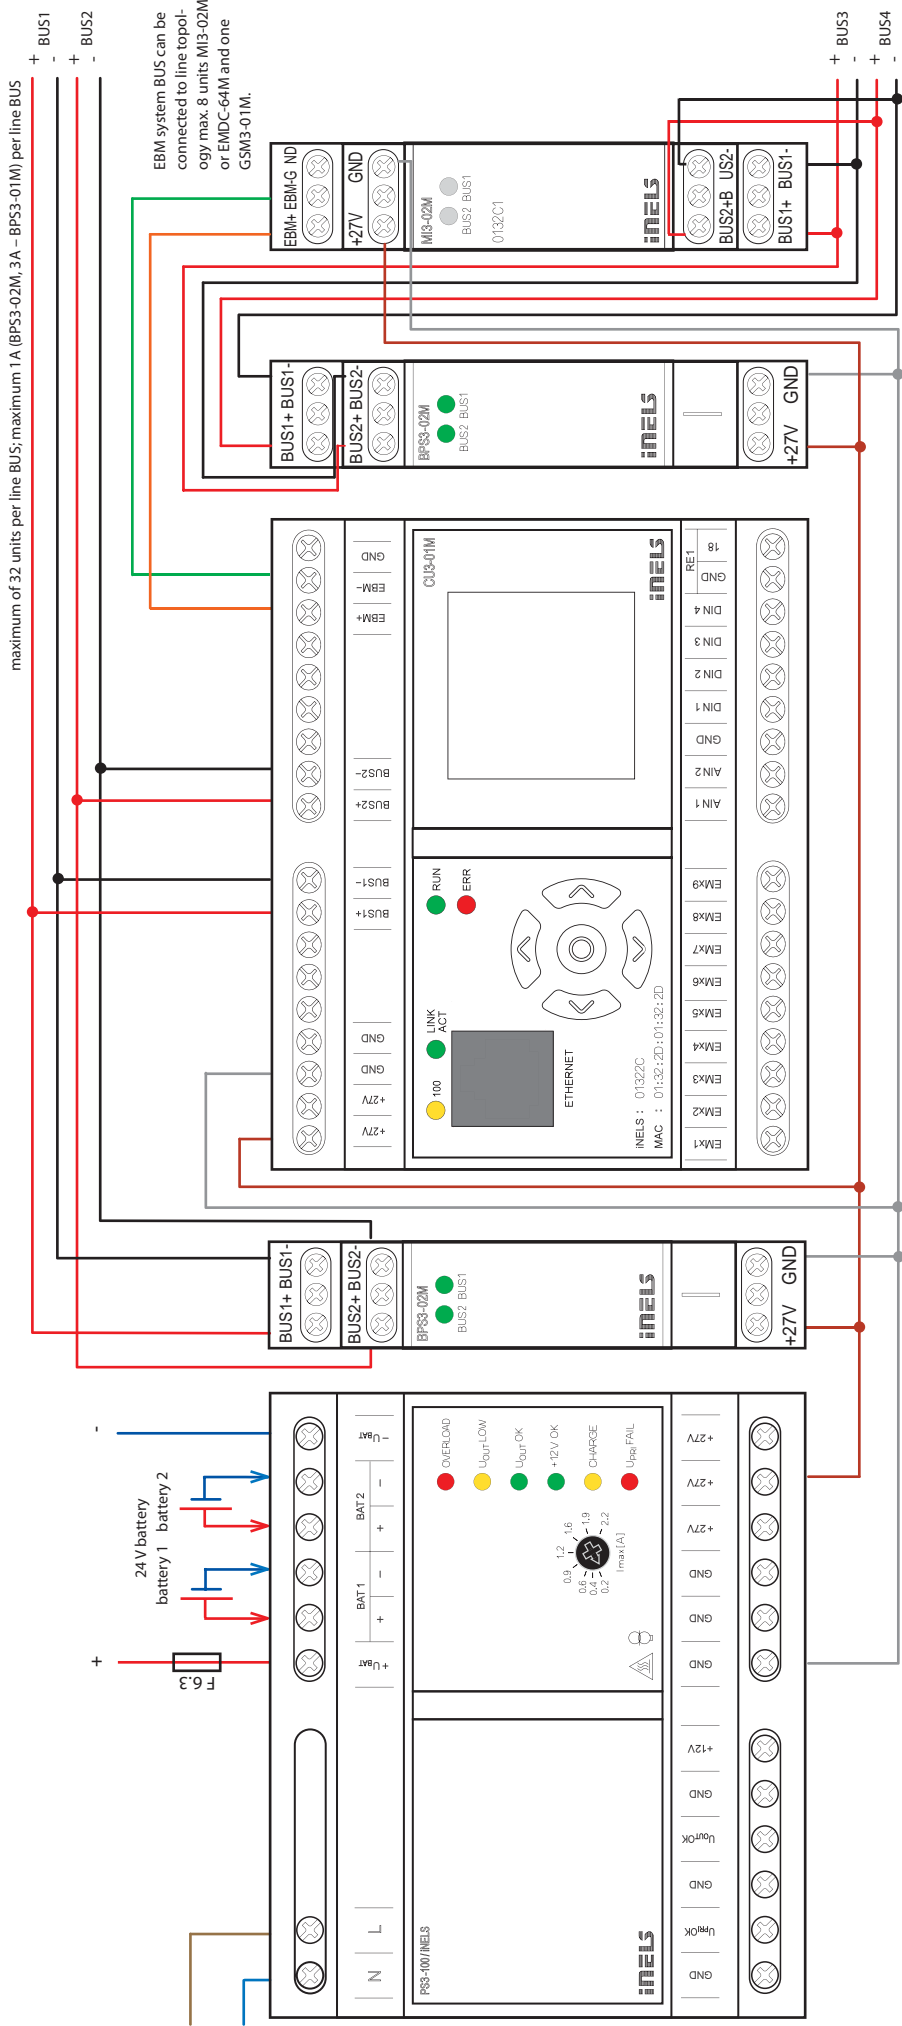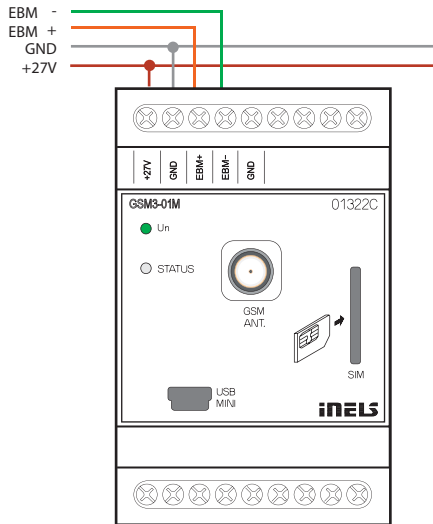




EAN code
SA3-02M: 8595188132374

Technical parameters		SA3-02M
Outputs		
Output:	2x changeover 16 A/AC1	
Switching voltage:	250 V AC1, 24 V DC	
Switching load:	4000 VA/AC1, 384 W/DC	
Surge current:	30 A; max. 4 s. at duty cycle 10%	
Output relays separated from all internal circuits:	reinforced Insulation (Cat. II surges by EN 60664-1)	
Isolation between relay outputs RE1 and RE2:	reinforced Insulation (Cat. II surges by EN 60664-1)	
Isolates. voltage open relay contact:	1 kV	
Minimal switching current:	100 mA	
Switching frequency/no load:	1200 min ⁻¹	
Switching frequency/rated load:	6 min ⁻¹	
Mechanical lifetime:	3x 10 ⁷	
Electrical lifetime AC1:	0.7x 10 ⁵	
Outputs indication:	2x yellow LED	
Communication		
Installation BUS:	BUS	
Power supply		
Supply voltage / tolerance:	27 V DC, -20 / +10 %	
Dissipated power:	max. 4 W	
Rated current:	50 mA (at 27V DC), from BUS	
Status indication unit:	green LED RUN	
Connection		
Terminal:	max. 2.5 mm²/1.5 mm² with sleeve	
Operating conditions		
Air humidity:	max. 80 %	
Operating temperature:	-20 to +55 °C	
Storing temperature:	-30 to +70 °C	
Protection degree:	IP20 device, IP40 mounting in the switchboard	
Overvoltage category:	II.	
Pollution degree:	2	
Operation position:	any	
Installation:	switchboard on DIN rail EN 60715	
Design:	1-MODULE	
Dimensions and weight		
Dimensions:	90 x 17.6 x 64 mm	
Weight:	82 g	

- Actuator SA3-02M is designed for switching two various appliance and loads with potentialless contact.
- SA3-02M is a switching actuator containing 2 independent relays with changeover potentialless contacts.
- Maximum load per contact is 16 A/4000 VA/AC1.
- Each of the two output contacts are individually controllable and addressable.
- Both relays are individually decorated input terminals, and therefore can switch various independent potentials.
- The actuator is designed for switching up to two various appliances and loads relay output (potentialless contact).
- Thanks to changeover contacts, it can be used to control one 230 V power (such as blinds, shutters or awnings) with appropriate bridging, the contacts can secure hardware blocking the possibility of simultaneous switching of the phase on both outputs, see example of connection.
- LEDs on the front panel signal the status of each output.
- Contact status of each relay can be changed separately and manually by control buttons on the front panel.
- Switching actuators SA3 are normally supplied in the option AgSnO₂ contact material.
- SA3-02M in 1-MODULE version is designed for mounting into a switch-board, on DIN rail EN60715.

Connection

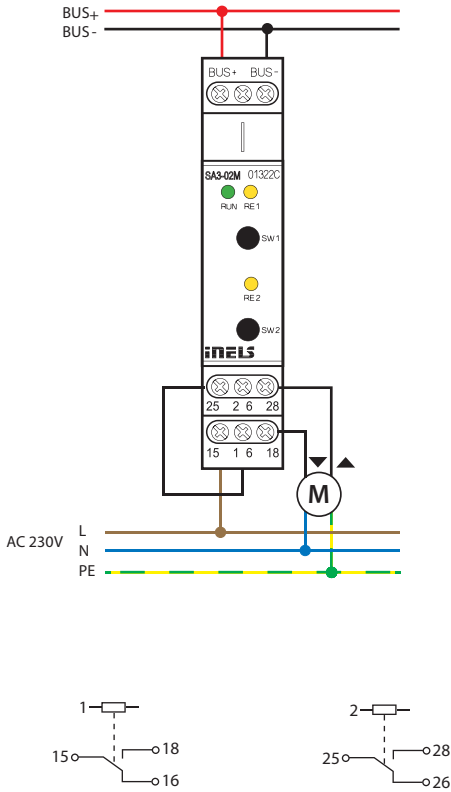


EAN code
SA3-04M: 8595188132381

Technical parameters		SA3-04M
Outputs		
Output:	4x changeover 16 A/AC1	
Switching voltage:	250 V AC1, 24 V DC	
Switching output:	4000 VA/AC1, 384 W/DC	
Surge current:	30 A; max. 4 s. at 10% duty cycle	
Output relays separated from all internal circuits:	reinforced Insulation (Cat. II surges by EN 60664-1)	
Isolation between relay outputs RE1-3 and RE4:	reinforced Insulation (Cat. II surges by EN 60664-1)	
Isolation between relay outputs RE1-3:	basic insulated. (Cat. II surges by EN 60664-1)	
Isolates. voltage open relay contact:	1 kV	
Min. switched current:	100 mA	
Switching frequency /no load:	1200 min ⁻¹	
Switching frequency/rated load:	6 min ⁻¹	
Mechanical life:	3x 10 ⁷	
Electrical life AC1:	0.7x 10 ⁵	
Output indication:	4x yellow LED	
Communication		
Installation BUS:	BUS	
Power supply		
Supply voltage / tolerance:	27 V DC, -20 / +10 %	
Dissipated power:	max. 4 W	
Rated current:	70 mA (at 27V DC), from BUS	
Status indication unit:	green LED RUN	
Connection		
Terminal:	max. 2.5 mm²/1.5 mm² with sleeve	
Operating conditions		
Air humidity:	max. 80 %	
Operating temperature:	-20 to +55 °C	
Storing temperature:	-30 to +70 °C	
Protection degree:	IP20 device, IP40 mounting in the switchboard	
Overvoltage category:	II.	
Pollution degree:	2	
Operation position:	any	
Installation:	switchboard on DIN rail EN 60715	
Design:	3-MODULE	
Dimensions and weight		
Dimensions:	90 x 52 x 65 mm	
Weight:	164 g	

- SA3-04M is a switching actuator containing 4 independent relays with changeover potentialless contacts.
- Maximum load per contact is 16 A/4000 VA/AC1.
- Each of the four output contacts are individually controllable and addressable.
- All four relays are individually decorated input terminals, and therefore can switch various independent potentials.
- The actuator is designed for switching to four various appliances and loads relay output (potential free contact).
- Thanks to changeover contacts, it can be used to control up to two drives 230 V power (such as blinds, shutters or awnings) with appropriate bridging, the contacts can secure hardware blocking the possibility of simultaneous switching of the phase on both outputs, see example of connection.
- LEDs on the front panel signal the status of each output.
- Contact status of each relay can be changed separately and manually by control buttons on a front panel.
- Switching actuators SA3 is normally supplied in the option AgSnO₂ contact material.
- SA3-04M in 3-MODULE version is designed for mounting into a switchboard, on DIN rail EN60715.

Connection

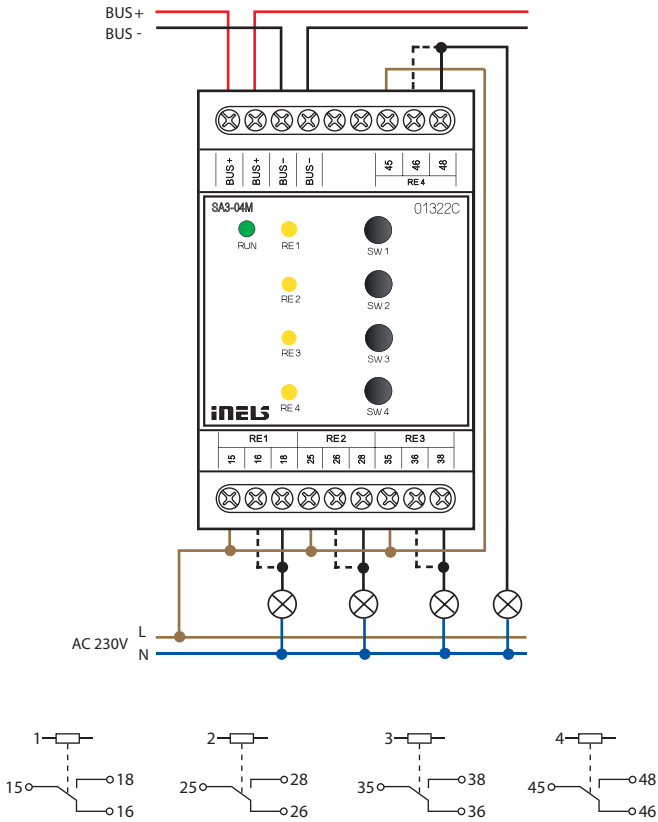




EAN code
SA3-06M: 8595188132879

Technical parameters	SA3-06M
Outputs	
Output:	6x changeover 8 A/AC1
Switching voltage:	250 V AC1, 24 V DC
Switching output:	2000 VA/AC1, 192 W/DC
Surge current:	10 A
Output relays separated from all internal circuits:	reinforced Insulation (Cat. II surges by EN 60664-1)
Isolation between relay outputs COM1 and COM2:	reinforced Insulation (Cat. II surges by EN 60664-1)
Isolation between individual relay outputs:	basic insulated. (Cat. II surges by EN 60664-1)
Isolates. voltage open relay contact:	1 kV
Max. current terminals COM1 and COM2:	16 A
Min. switched current:	100 mA/ 5V DC
Switching frequency /no load:	300 min ⁻¹
Switching frequency/rated load:	15 min ⁻¹
Mechanical life:	2x 10 ⁷
Electrical life AC1:	5x 10 ⁴
Output indication:	6x yellow LED
Communication	
Installation BUS:	BUS
Power supply	
Supply voltage / tolerance:	27V DC, -20 / +10 %
Dissipated power:	max. 9 W
Rated current:	60 mA (at 27V DC), from BUS
Status indication unit:	green LED RUN
Connection	
Terminal:	max. 2.5 mm ² / 1.5 mm ² with sleeve
Operating conditions	
Air humidity:	max. 80%
Operating temperature:	-20 .. +55 °C
Storing temperature:	-30 .. +70 °C
Protection degree:	IP20 device, IP40 mounting in the switchboard
Overvoltage category:	II.
Pollution degree:	2
Operation position:	any
Installation:	switchboard on DIN rail EN 60715
Design:	3-MODULE
Dimensions and weight	
Dimensions:	90 x 52 x 65 mm
Weight:	160 g

- The actuator is designed for switching up to six various appliances and loads with potentialless contact.
- SA3-06M is a switching actuator contains 6 independent relays with changeover potentialless contacts.
- Maximum load per contact is 8 A/2000 VA/AC1.
- Each of six output contacts are individually controllable and addressable.
- The relays are divided into two groups, the group of four relays on the bottom terminal switches the common potential, a pair of relays on top of the terminal switches second common potential.
- The actuator is suitable for operating discontinuously controlled thermo drives in the distributor underfloor heating.
- LEDs on the front panel signal the status of each output.
- Contact status of each relay can be changed separately and manually by control buttons on a front panel.
- SA3-06M is normally supplied in the option AgSnO₂ contact material.
- SA3-06M in 3-MODULE version is designed for mounting into a switchboard/DIN rail EN60715.

Connection

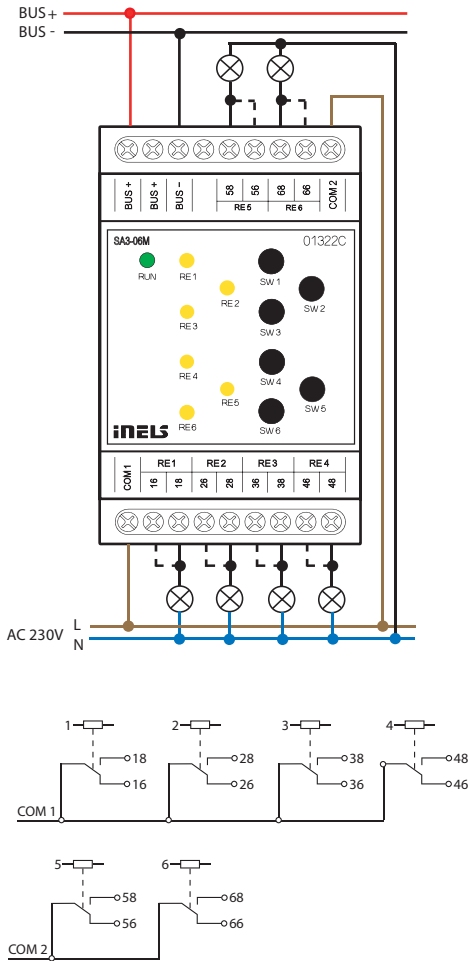


EAN code
SA3-012M: 8595188132466
SA3-012M/120V: 8595188133029

Technical parameters		SA3-012M	SA3-012M/120V
Outputs			
Output:	12x NO 8 A/AC1		
Switched voltage:	250 V AC1, 24 V DC		
Switched output:	2000 VA/AC1, 192 W/DC		
Peak current:	10 A		
Output relays separated from all internal circuits:	reinforced Insulation (Cat. II surges by EN 60664-1)		
Isolation between relay outputs COM1, COM2 and COM3:	reinforced Insulation (Cat. II surges by EN 60664-1)		
Isolates. voltage open relay contact:	1 kV		
Max. current of one common terminal:	16 A		
Minimal switched current:	100 mA / 10 V DC		
Switching frequency without load:	300 min ⁻¹		
Switching frequency with rated load:	15 min ⁻¹		
Mechanical life:	1x 10 ⁷		
Electrical life AC1:	1x 10 ⁵		
Output indication:	12 x yellow LED		
Communication			
Installation BUS:	BUS		
The installation BUS is separated from all internal circuits:	reinforced Insulation (Cat. II surges by EN 60664-1)		
Status indication unit:	green LED RUN		
Power supply			
Voltage of BUS / tolerance / nominal current:	27V DC, -20 / +10 %, 5mA		
Supply voltage of power section (relay) tolerance / nominal current:	AC 230V (50 Hz), -15 / +10 %, 20 mA	AC 120V (60 Hz), -15 / +10 %, 40 mA	
Dissipated power:	max. 6 W	max. 5 W	
Connection			
Terminal:	max. 2.5 mm ² /1.5 mm ² with sleeve		
Operating conditions			
Operating temperature:	-20 to +55 °C		
Storing temperature:	-30 to +70 °C		
Protection degree:	IP20 device, IP40 mounting in the switchboard		
Overvoltage category:	II.		
Pollution degree:	2		
Operating position:	any		
Installation:	switchboard on DIN rail EN 60715		
Design:	6-MODULE		
Dimensions and weight			
Dimensions:	90 x 105 x 65 mm		
Weight:	310 g		

- The actuator is designed for switching to twelve various appliances and loads with potentialless contact.
- SA3-012M is a switching actuator containing 12 independent relays with NO potentialless contacts, with the fact that switches the same potential.
- Maximal loadability of contacts is 8 A/2000 VA/AC1.
- Each of the twelve output contacts are individually controllable and addressable.
- Actuator SA3-012M is powered by an AC voltage 230V. The unit SA3-012M/120V is powered by AC voltage 120V AC.
- BUS is galvanically separated from the internal circuits of unit.
- LED on front panel signalizes state of each output.
- Contact status of each relay can be changed separately and manually by control buttons on a front panel.
- SA3-012M is normally supplied in the option AgSnO₂ contact material.
- SA3-012M in design 6-MODULE is designed to be mounted into a switchboard, onto DIN rail EN60715.

Connection

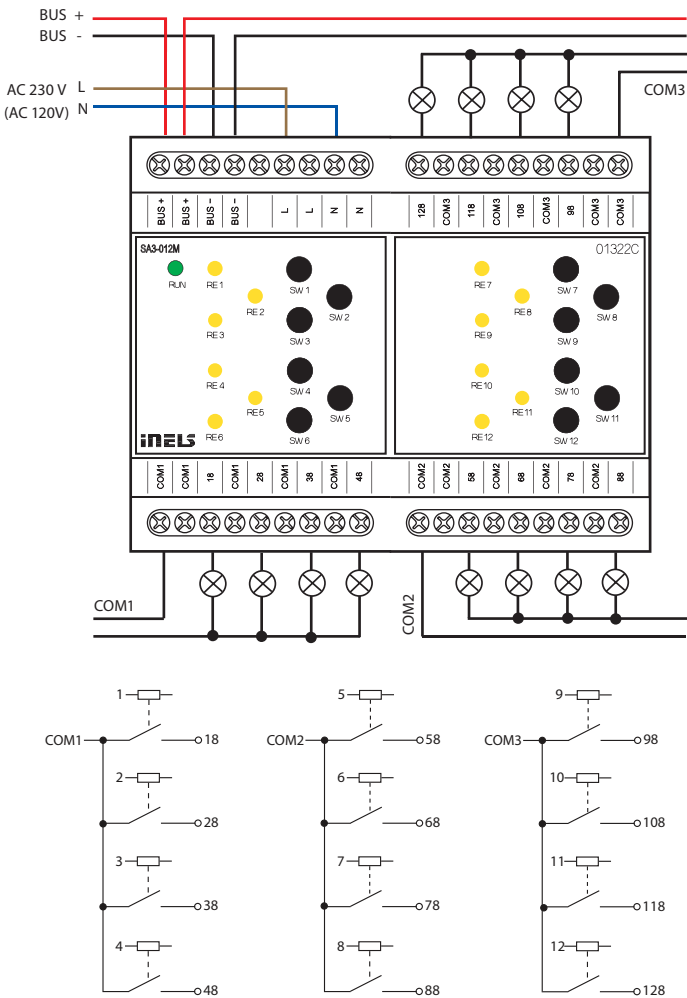





EAN code
SA3-022M: 8595188135269

Technical parameters		SA3-022M
Outputs		
Output indication:		yellow LED
Output relays separated from all internal circuits:		reinforced Insulation (Cat. II surges by EN 60664-1)
Insulation between COM potentials:		reinforced Insulation (Cat. II surges by EN 60664-1)
Isolates. voltage open relay contact:		1 kV
SSR (Electronic Relay):		4x NO (OUT3 - OUT6)
Switching voltage:		20 - 240 V AC
Switching output:		480 VA
Surge current:		20 A, t ≤ 16 ms
Relay 6A:		12x NO (RE1 - RE6, RE11 - RE16), 1x HW block changeover (OUT1, OUT2)
Switching voltage:		250 V AC1, 30 V DC
Switching output:		1500 VA / AC1; 300 VA / AC15; 180 W/DC, AC3
Minimum switching load:		500 mW (12 V / 10 mA)
Mechanical life:		10x10 ⁶
Electrical life AC1:		6x10 ⁴
Relay 10A:		4x NO (RE7 - RE10)
Switching voltage:		250 V AC1, 24 V DC
Switching output:		2500 VA/AC1, 240 W/DC
Surge current:		30 A max. 4s at 10%
Minimal switched current:		100 mA
Switching frequency without load:		1200 min ⁻¹
Switching frequency with rated load:		6 min ⁻¹
Mechanical life:		3x 10 ⁷
Electrical life AC1:		0.7x 10 ⁵
Communication		
Installation BUS:		BUS
Unit status indication:		green LED POWER
Power supply		
Supply voltage / tolerance:		27 V DC, -20 / +10 %
Dissipated power:		max. 3W
Rated current:		100 mA (at 27V DC), from BUS
Power status indication:		green LED RUN
Connection		
Terminal:		max. 2.5 mm ² /1.5 mm ² with sleeve
Operating conditions		
Operating temperature:		-20 to +55 °C
Storing temperature:		-30 to +70 °C
Protection degree:		IP20 device, IP40 mounting in the switchboard
Overvoltage category:		II.
Pollution degree:		2
Operating position:		any
Installation:		switchboard on DIN rail EN 60715
Design:		6-MODULE
Dimensions and weight		
Dimensions:		90 x 105 x 65 mm
Weight:		307 g

- Equipped with 22 relay outputs (of which 1x changeover contact – roller blinds, blinds).
- Switch lighting and socket circuits (6A and 10A relay) with common potential at the "COMx" terminal.
- Control of roller blinds, blinds (24 - 230 V AC / DC).
- Relay control of the fan coil unit - heating / cooling, 3 fan speeds (24 - 230 V AC / DC).
- Connection to BUS, communication with CU3-03M.
- The front panel LEDs indicate the status of each output.
- SA3-022M in design 6-MODULE is designed to be mounted into a switchboard, onto DIN rail EN60715.

Connection

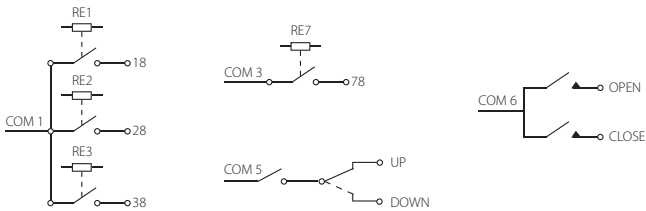
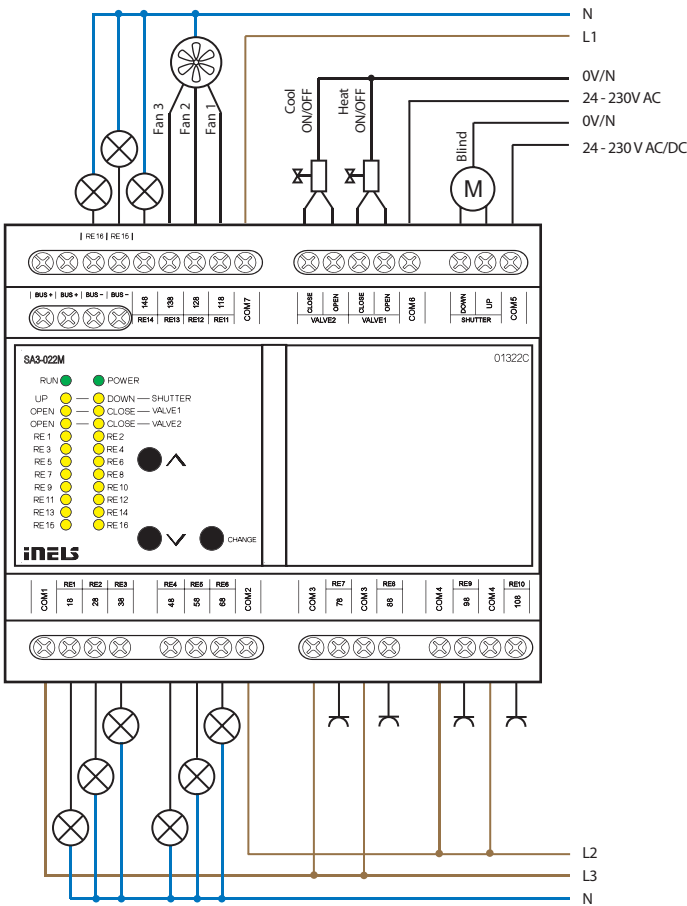


EAN code
EA3-022M: 8595188135238

Technical parameters		EA3-022M
Outputs		
Output relays separated from all internal circuits:		reinforced Insulation (Cat. II surges by EN 60664-1)
Insulation between COM potentials:		reinforced Insulation (Cat. II surges by EN 60664-1)
Isolates. voltage open relay contact:		1 kV
SSR (Electronic Relay):		4x NO (OUT3 - OUT6)
Switching voltage:		20 - 240 V AC
Switching output:		480 VA
Surge current:		20 A, t ≤ 16 ms
Relay 6A:		12x NO (RE1 - RE6, RE11 - RE16), 1x HW block changeover (OUT1, OUT2)
Switching voltage:		250 V AC1, 30 V DC
Switching output:		1500 VA / AC1; 300 VA / AC15; 180 W/DC, AC3
Minimum switching load:		500 mW (12 V / 10 mA)
Mechanical life:		10x10 ⁶
Electrical life AC1:		6x10 ⁴
Relay 10A:		4x NO (RE7 - RE10)
Switching voltage:		250 V AC1, 24 V DC
Switching output:		2500 VA/AC1, 240 W/DC
Surge current:		30 A max. 4s at 10%
Minimal switched current:		100 mA
Switching frequency without load:		1200 min ⁻¹
Switching frequency with rated load:		6 min ⁻¹
Mechanical life:		3x 10 ⁷
Electrical life AC1:		0.7x 10 ⁵
Communication		
Installation BUS:		BUS
Unit status indication:		green LED RUN
Power supply		
Supply voltage / tolerance:		27 V DC, -20 / +10 %
Dissipated power:		max. 2 W
Rated current:		100 mA (at 27V DC), from BUS
Connection		
Terminal:		max. 2.5 mm ² /1.5 mm ² with sleeve
Operating conditions		
Operating temperature:		-20 to +55 °C
Storing temperature:		-30 to +70 °C
Protection degree:		IP20 device, IP40 mounting in the switchboard
Overvoltage category:		II.
Pollution degree:		2
Operating position:		any
Installation:		switchboard on DIN rail EN 60715
Design:		6-MODULE
Dimensions and weight		
Dimensions:		90 x 105 x 65 mm
Weight:		337 g

- Equipped with 22 relay outputs (of which 1x changeover contact – roller blinds, blinds).
- Switch lighting and socket circuits (6A and 10A relay) with common potential at the "COMx" terminal.
- Control of roller blinds, blinds (24 - 230 V AC / DC).
- Relay control of the fan coil unit - heating / cooling, 3 fan speeds (24 - 230 V AC / DC).
- Connection to BUS, communication with CU3-03M.
- EA3-022M in design 6-MODULE is designed to be mounted into a switchboard, onto DIN rail EN60715.

Connection

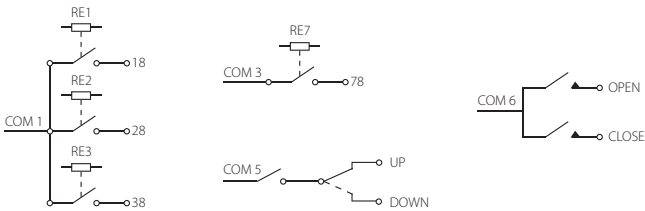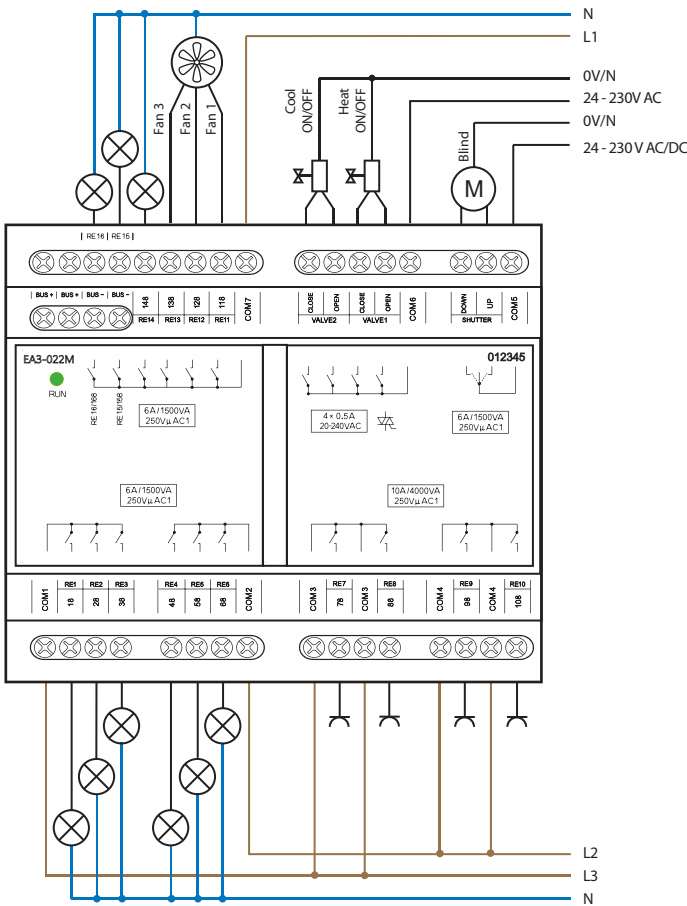




EAN code
SA3-01B: 8595188132350
SA3-02B: 8595188132367

Technical parameters		SA3-01B	SA3-02B
Inputs			
Temperature measuring:	Yes, input for external thermo sensor TC, TZ		
Scope and accuracy of tem. meas.:	-20 .. +120°C; 0.5°C from the range		
Outputs			
Output:	1x NO 16 A/AC1	2x NC 8 A/AC1	
Switching voltage:	250 V AC, 24 V DC		
Switched load:	4000 VA/AC1, 384 W/DC	2000 VA/AC1, 192 W/DC	
Surge current:	30 A; max. 4 s. when repeating 10%	10A	
Output relays separated from all internal circuits:	reinforced Insulation (Cat. II surges by EN 60664-1)		
Insulation voltage between relay outputs RE1-RE2:	x	basic Isolation (Cat. II surges by EN 60664-1)	
Minimal switching current:	100 mA / 5 V		
Switching frequency/no load:	1200 min ⁻¹	300 min ⁻¹	
Switching frequency/rated load:	6 min ⁻¹	15 min ⁻¹	
Mechanical lifetime:	3x 10 ⁷	1x 10 ⁷	
Electrical lifetime for AC1:	0.7x 10 ⁵	1x 10 ⁵	
Output indication:	yellow LED	2x yellow LED	
Communication			
Installation BUS:	BUS		
Power supply			
Supply voltage / tolerance:	27 V DC, -20 / +10 %		
Dissipated power:	max. 4 W		
Rated current:	30 mA (at 27V DC)	50 mA (at 27V DC)	
Status indication unit:	green LED RUN		
Connection			
Data terminals:	terminal, 0.5 - 1 mm ²		
Power outputs:	2x conduct. CY, Ø 2.5 mm ²	6x conduct.CY, Ø 0.75 mm ²	
Operating conditions			
Operating temperature:	-20 .. +55 °C		
Storage temperature:	-30 .. +70 °C		
Protection degree:	IP30		
Overvoltage category:	II.		
Pollution degree:	2		
Operating position:	any		
Installation:	into installation box		
Dimensions and weight			
Dimensions:	49 x 49 x 21 mm		
Weight:	50 g	50 g	


- Actuators are designed for switching of one (SA3-01B), respectively two (SA3-02B) of various appliances and loads relay output (potential-less contact).
- SA3-01B contains 1 relay with switching potentialless contact with max. load 16 A/4000 VA/AC1.
- SA3-02B contains 2 relays with switching potentialless contacts with max. load 8 A/2000 VA/AC1.
- Output contacts are separately controllable and addressable.
- Both relay actuator SA3-02B are individually decorated input terminals, and therefore can switch various independent potentials.
- Thanks to changeover contacts, the SA3-02B actuator can used to control a 230 V drive (such as blinds, shutters or awnings), whereas by proper bridging of contacts, it is possible to secure locking hardware options while switching on phase two outputs.
- Actuators are equipped with a temperature input for connecting an external two-wire temperature sensor TC / TZ (see accessories).
- LED on front panel signalizes state of each output.
- SA3 is normally supplied in the option AgSnO₂ contact material.
- SA3-01B, SA3-02B are designed for mounting into the installation box.

Connection

SA3-01B

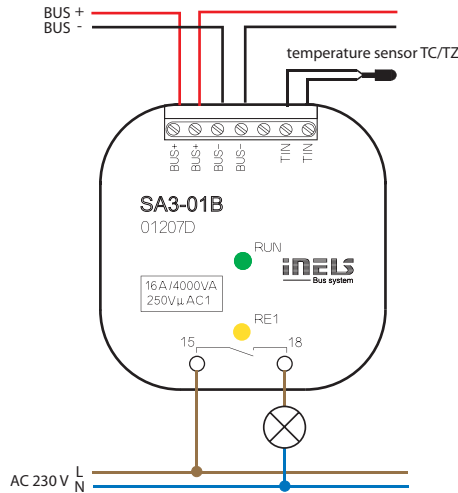

SA3-02B

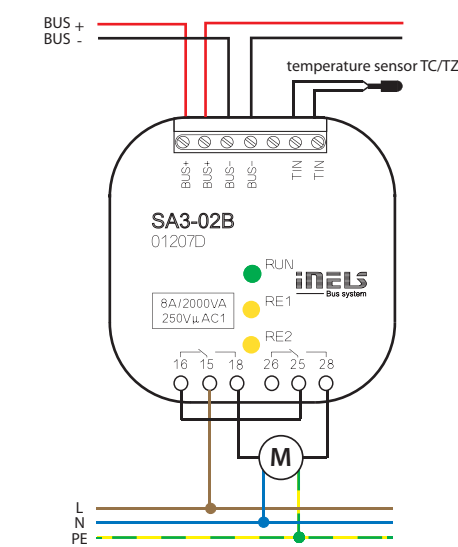


EAN code
JA3-02B/DC: 8595188132718

Technical parameters	JA3-02B/DC
Inputs	
Inputs:	2x AIN/DIN
Resolution:	bit 10
Ext. temperature sensor:	the connection between AIN1/DIN1 and AIN2/DIN2
Type of ext. sensor:	TC/TZ
Temperature measurement range:	-20°C to +120°C
Temperature measurement accuracy:	0.5°C from range
Outputs	
Insulative voltage between outputs and internal circuits:	3.75 kV, SELV by EN 60950
Rated current:	0.85 A*
Peak current:	1.5 A / < 3s
Switched voltage:	12-24 V DC
Output indication UP, (↗):	red (orange) LED
Output indication DOWN, (↘):	green LED
Communication	
Installation BUS:	BUS
Power supply	
Supply voltage / tolerance:	27 V DC, -20 / +10 %
Dissipated power:	max. 1 W
Rated current:	60mA (at 27V DC), from BUS
Status indication unit:	green LED RUN
Connection	
Data terminals:	terminal 0.5 - 1 mm ²
Power outputs:	4x conductor CY, 0.75 mm ²
Operating conditions	
Operating temperature:	-20 to +50°C
Storage temperature:	-30 to +70°C
Protection degree:	IP30
Control device purpose:	operative control device
Control device construction:	individual control device
Characteristics of automatic operation:	1.B.E
Heat and fire resistance category:	FR-0
Anti-shock category (immunity):	class 2
Rated impulse voltage:	2.5 kV
Overvoltage category:	II.
Pollution degree:	2
Operation position:	any
Installation:	into an installation box
Dimensions and weight	
Dimensions:	49 x 49 x 13 mm
Weight:	32 g

* Maximal operation time of outputs with rated current 0.85 A is 10 minutes... after that the output heating protection activates. The lower the current, the longer duration of protection.

- JA3-02B/DC actuator serves to control blinds, shutters, garage doors, entrance gates, etc.
- Operates electrical motors, which are controlled in 2 directions and have a built-in limit switch.
- JA3-02B/DC controls electric drives with supply voltages up to 24 V DC, where the direction of rotation of the driver is controlled by changing the voltage polarity of the motor.
- The unit is equipped with thermal and overcurrent overload protection outputs.
- Status of units is indicated by green LED RUN on the front panel:
 - with the supply voltage connected (through BUS) and the unit is not controlled by BUS, LED RUN shines.
 - with the supply voltage connected (through BUS) and the unit is controlled by BUS, LED RUN flashes.
- Status of output contacts UP/DOWN (↗↘):
 - while contact UP (↗) is switched, red LED shines (orange).
 - while contact DOWN (↘) is switched, green LED shines.
- The unit is also equipped with two analog digital inputs (AIN/DIN), which can be used to connect two potential free contacts (e.g. to connect double button for local control) or a single external temperature sensor TC/TZ (see accessories).
- JA3-02B/DC is designed for mounting into an installation box.

Connection

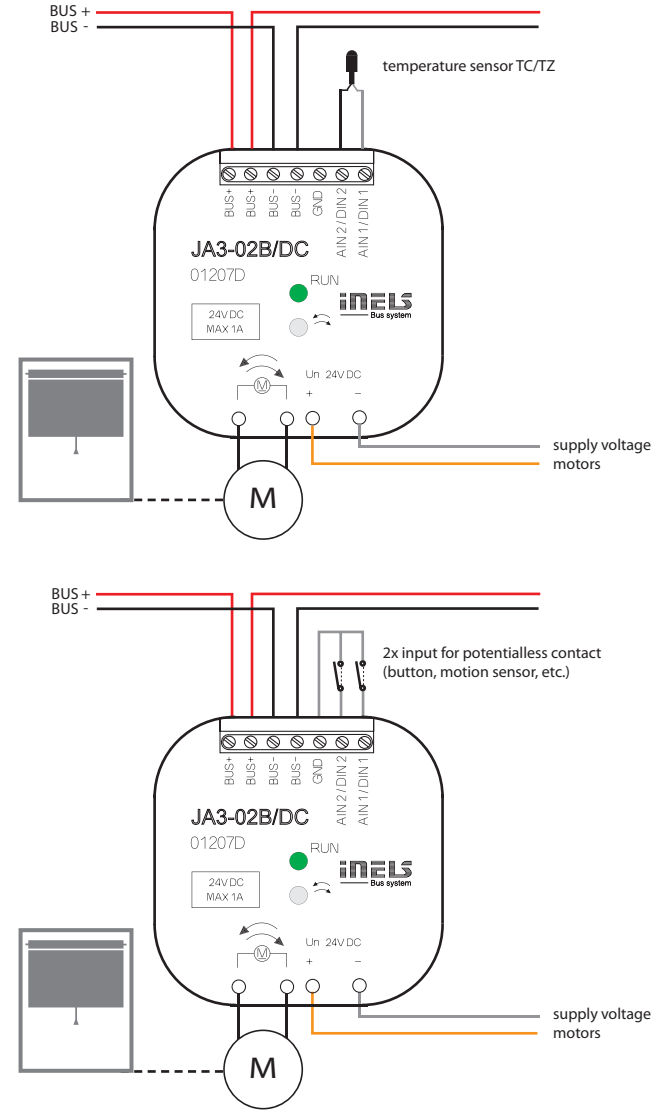




EAN code
JA3-018M: 8595188174466
JA3-018M/120V: 8595188174473

Technical parameters		JA3-018M	JA3-018M/120V
Outputs			
Output:	9x changeover 4 A/AC15		
Switched voltage:	250 V AC, 24 V DC		
Switched output:	1000 W/AC15, 100 W/DC		
Peak current:	10 A		
Output relays separated from all internal circuits:	basic insulated. (Cat. III surges by EN 60664-1)		
Isolation between relay out-puts GATE1, GATE2 and GATE3:	basic insulated. (Cat. II surges by EN 60664-1)		
Isolates. voltage open relay contact:	1 kV		
Minimal switched current:	100 mA / 10 V DC		
Switching frequency without load:	300 min ⁻¹		
Switching frequency with rated load:	15 min ⁻¹		
Mechanical life:	1x 10 ⁷		
Electrical life AC1:	1x 10 ⁵		
Output indication:	9x yellow LED		
Communication			
Installation BUS:	BUS		
Status indication unit:	green LED RUN		
Power supply			
Supply voltage by BUS / tolerance / nominal current:	27V DC, -20 / +10 %, 5mA		
Supply voltage of power section (relay) tolerance / nominal current:	AC 230V (50 Hz), -15 / +10 %, 20 mA	AC 120V (60 Hz), -15 / +10 %, 40 mA	
Dissipated power:	max. 2 W		
Connection			
Terminal:	max. 2.5 mm ² /1.5 mm ² with sleeve		
Operating conditions			
Operating temperature:	-20 to +55 °C		
Storing temperature:	-30 to +70 °C		
Protection degree:	IP20 device, IP40 mounting in the switchboard		
Overvoltage category:	II.		
Pollution degree:	2		
Operating position:	vertical		
Installation:	switchboard on DIN rail EN 60715		
Design:	6-MODULE		
Dimensions and weight			
Dimensions:	90 x 105 x 65 mm		
Weight:	346 g		

- JA3-018M is an actuator designed for control of roller shutters, blinds, awnings, garage doors, entrance gates, etc.
- It controls electric drives that are controlled in two directions and have a built-in limit switch.
- The unit's status is indicated by the green RUN LED on the front panel
 - If the power supply is connected, but there is no communication via BUS with master, the LED RUN is on continuously.
 - If the supply voltage is connected and the unit communicates by BUS, the LED RUN flashes.
- The status of the output contacts is indicated by the U/D LED:
 - When the blind / roller blind is moving up / down, the corresponding LED lights up.
 - If the number of switching operations per minute is exceeded, the corresponding LED flashes.
- JA3-018M in 6-MODULE version is designed for mounting into a switchboard on DIN rail EN60715.

Connection

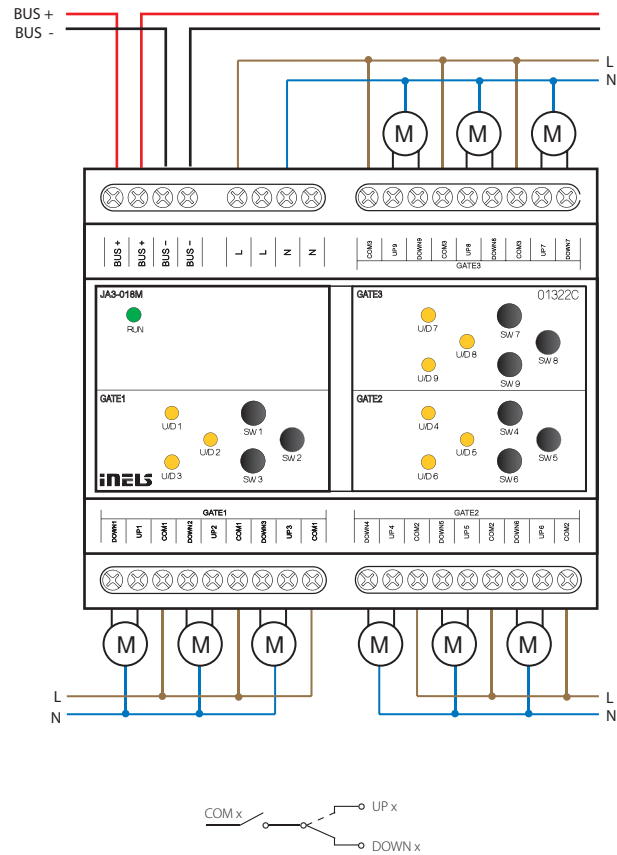


EAN code
DA3-22M: 8595188132626
DA3-22M/120V: 8595188133036

Technical parameters		DA3-22M	DA3-22M/120V
Inputs			
Input:	⚠	2x inputs, switching potential L*	
Temperature measuring:	⚠	YES, input for external thermo sensor TC/TZ	
Scope and accuracy of temp. measurement:		-20 to +120°C; 0.5°C from the range	
Number of control buttons:		2x buttons 4x potentiometers on front panel	
Outputs			
Output:		2x contactless outputs, 2x MOSFET	
Load type:		resistive, inductive, capacitive**, LED, ESL	
Isolation BUS separated from all internal circuits:		reinforced Insulation (Cat. II surges by EN 60664-1)	
Isolation voltage between particular power:		max. 500 V AC	
Minimal controlled load:		10 VA	
Maximal controlled load:		400 VA for each channel	200 VA for each channel
Output indication ON/OFF:		2x yellow LED	
Device protection:		thermal / short-term overload / long-term overload	
Communication			
Installation BUS:		BUS	
Power supply			
Supply voltage by BUS / tolerance:		27 V DC, -20 / +10 %	
Rated current:		5 mA (at 27V DC), from BUS	
Status indication unit:		green LED RUN	
Supply voltage for power section / tolerance:		AC 230V (50Hz), -15 / +10 %	AC 120V (60Hz), -15 / +10 %
Dissipated power:		max. 13 W	max. 7.5 W
Connection			
Terminal:		max. 2.5 mm²/1.5 mm² with sleeve	
Operating conditions			
Air humidity:		max. 80 %	
Operating temperature:		-20 to +35 °C	
Storing temperature:		-30 to +70 °C	
Protection degree:		IP20 device, IP40 mounting in the switchboard	
Overvoltage category:		II.	
Pollution degree:		2	
Operating position:		vertical	
Installation:		switchboard on DIN rail EN 60715	
Design:		3-MODULE	
Dimensions and weight			
Dimensions:		90 x 52 x 65 mm	
Weight:		170 g	

* The inputs are not galvanically isolated from the supply voltage.
** Attention: It is not allowed to connect loads of inductive and capacitive character, at the same time.
⚠ Input is connected to the mains voltage potential.

- DA3-22M is a universal dimming 2-fold actuator enabling control of brightness intensity of dimmable light sources of the type ESL, LED and RLC with power supply 230 V.
- DA3-22M has two MOSFET controlled outputs 230 V AC, maximum load is 2x 400 VA.
- Option of connecting an external temperature sensor.
- Each output channel is independently controllable and addressable.
- Type of light source is set by a switch on the front panel.
- By setting the min. brightness potentiometer on the front panel, flashing of different types of light sources is eliminated.
- DA3-22M is equipped with two inputs 230 V AC, which can be controlled by mechanical switches (buttons, relays). Inputs are galvanically connected to potential L, which is permanently at the terminals IN1 and IN2.
- Buttons on the front panel, you can manually switch on or off the corresponding output.
- Electronic overcurrent and thermal protection - switch off output in case of overload short circuit and overheating.
- The power supply (potential L) must be protected by a protective element corresponding to the power input of the connected load, e.g. a safety fuse.
- During installation, it is necessary to leave on each side of the actuator at least half the module space for better cooling.
- DA3-22M in 3-MODULE version is designed for mounting into a switchboard on DIN rail EN60715.

Connection

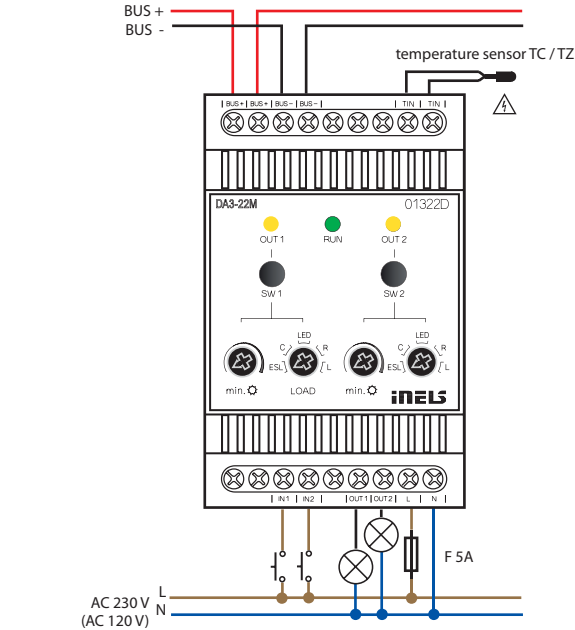

Types of connectable loads

type of source	symbol	description
R resistive		ordinary light bulb, halogen lamp
L inductive		coiled transformer for low-voltage halogen lamps
C capacitive		electronic transformer for low-voltage halogen lamps
LED		LED lamps and LED light sources, 230 V
ESL		dimmable energy-saving fluorescent tubes




EAN code
DA3-06M: 8595188174442
DA3-06M/120V: 8595188174459

Technical parameters		DA3-06M	DA3-06M/120V
Outputs			
Output:	6x contactless outputs, 2x MOSFET, channel		
Load type:	resistive, inductive, capacitive*, LED, ESL		
Isolation BUS separated from all internal circuits:	reinforced Insulation (Cat. II surges by EN 60664-1)		
Isolation voltage between particular power:	max. 500 V AC		
Minimal controlled load:	10 VA		
Maximal controlled load:	150 VA for each channel	75 VA for each channel	
Output indication ON/OFF:	6x yellow LED		
Device protection:	thermal / short-term overload / long-term overload / short circuit		
Communication			
Installation BUS:	BUS		
Power supply			
Supply voltage by BUS / tolerance:	27 V DC, -20 / +10 %		
Rated current:	100 mA (at 27V DC), from BUS		
Status indication unit:	green LED RUN		
Supply voltage for power section / tolerance:	3x AC 230 V (50 Hz), -15 / +10 %	3x AC 120 V (60 Hz), -15 / +10 %	
Connection			
Terminal:	max. 2.5 mm ² /1.5 mm ² with sleeve		
Operating conditions			
Air humidity:	max. 80 %		
Operating temperature:	-20 to +35 °C		
Storing temperature:	-30 to +70 °C		
Protection degree:	IP20 device, IP40 mounting in the switchboard		
Overvoltage category:	II.		
Pollution degree:	2		
Operating position:	vertical		
Installation:	switchboard on DIN rail EN 60715		
Design:	6-MODULE		
Dimensions and weight			
Dimensions:	90 x 105 x 65 mm		
Weight:	320 g		

* Attention: It is not allowed to connect loads of inductive and capacitive character, at the same time.

- DA3-06M is a universal six-channel dimmer actuator that controls the brightness of dimmable ESL, LED and RLC light sources with 230V power.
- The DA3-06M has 6 semiconductor controlled 230 V AC outputs. Maximum possible load is 150 VA for each channel.
- Each of the output channels is individually controllable.
- Setting min. Brightness with the potentiometer on the front of the instrument eliminates flickering of different types of light sources.
- Using the front panel control buttons, you can manually control the output.
- The actuator is equipped with electronic overcurrent and thermal protection that shuts off the output during overloads, short circuits or overheating.
- When installing, on each side of the actuator, it is necessary to leave at least half a module space for better cooling.
- DA3-06M in 6-MODULE version is designed for mounting into a switchboard/ DIN rail EN60715.

Connection

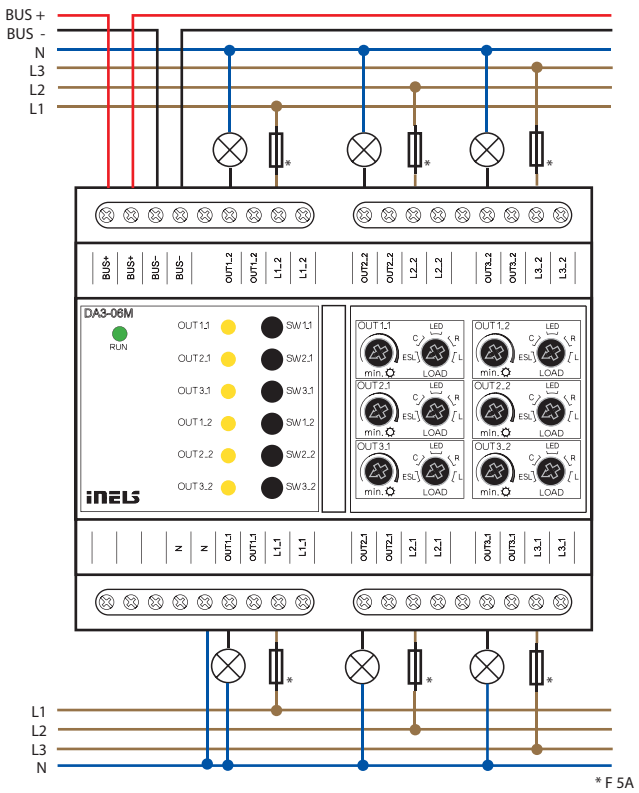

Types of connectable loads

type of source	symbol	description
R resistive		ordinary light bulb, halogen lamp
L inductive		coiled transformer for low-voltage halogen lamps
C capacitive		electronic transformer for low-voltage halogen lamps
LED		LED lamps and LED light sources, 230 V
ESL		dimmable energy-saving fluorescent tubes




EAN code
LBC3-02M: 8595188132688

Technical parameters	LBC3-02M
Inputs	
Number of control buttons:	2 buttons on the front panel
Outputs	
Output:	2x 0(1)-10 V/10 mA 2x changeover 16 A/AC1
Switching voltage:	250 V AC1, 24 V DC
Switching capacity:	4000 VA/AC1, 384 W/DC
Peak current:	30 A; max. 4 s. at duty cycle 10%
Insulation voltage between individual relay outputs	4 kV reinforced Insulation
RE1aRE2 and internal circuits:	(Cat. II surges by EN 60664-1)
Isolates. voltage open relay contact:	1 kV
Minimal switched current:	100 mA
Frequency of switching/no load:	1200 min ⁻¹
Frequency of switching/rat. load:	6 min ⁻¹
Mechanical life:	3x 10 ⁷
Electrical life AC1:	0.7x 10 ⁵
Output indication:	2x yellow LED
Communication	
Installation BUS:	BUS
Power supply	
Supply voltage / tolerance:	27 V DC, -20 / +10 %
Dissipated power:	max. 2 W
Rated current:	60 mA (at 27V DC), from BUS
Status indication unit:	green LED RUN
Connection	
Terminal:	max. 2.5 mm ² /1.5 mm ² with sleeve
Operating conditions	
Air humidity:	max. 80 %
Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20 device, IP40 mounting in the switchboard
Overvoltage category:	II.
Pollution degree:	2
Operating position:	any
Installation:	switchboard on DIN rail EN 60715
Design:	3-MODUL
Dimensions and weight	
Dimensions:	90 x 52 x 65 mm
Weight:	134 g

- LBC3-02M is an analog two-channel actuator designed to control dimmable ballasts of fluorescent lamps or other light sources controlled by signal 0(1) - 10 V DC.
- In the iDM3, it is possible to set the output mode 0(1) - 10 V DC.
- During analog voltage output (0)1-10 V DC control, relay contact automatically switches power supply to light ballast (0% = relay OFF, 1-100% = relay ON)
- LBC3-02M contains 2 independent analog voltage outputs (0)1-10 V DC and their dependents 2 relays with potential-free contact.
- Maximum contacts load 16 A/4000 VA/AC1.
- Each of two channels is separately controllable and addressable.
- LEDs on front panel signals status of each channel.
- With control buttons on the front panel, it is possible to change the status of each channel separately.
- LBC3-02M in 3-MODULE version is designed for mounting into a switchboard/ DIN rail EN60715.

Connection

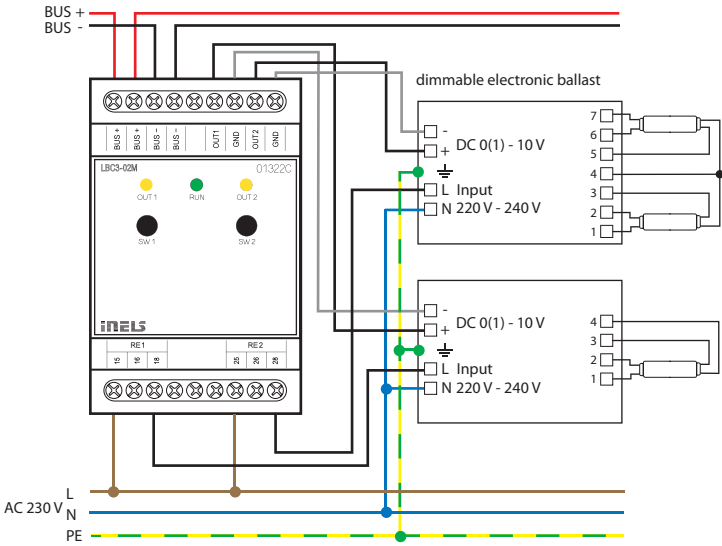



EAN code
RFDA-73M/RGB (866 MHz): 8595188157667
RFDA-73M/RGB (868.5MHz): 8595188146814
RFDA-73M/RGB (868.1 MHz): 8595188144179
RFDA-73M/RGB (916 MHz): 8595188153003
RFDA-73M/RGB (922 MHz): 8595188158312

Technical parameters		RFDA-73M/RGB
Outputs		
Dimmed load:	LED strip 12V,24V with common anode; RGB LED strips 12V, 24V with common anode	
Number of channels:	3	
Rated current:	3x 5 A	
Peak current:	3x 10 A	
Switching voltage:	Un	
Controlling		
RF by command from the transmitter:	866 MHz / 868 MHz / 916 MHz	
Ext. signal:	0-10 V, 1-10V	
Range in open space:	up to 160 m	
Output for RF antenna:	SMA connector *	
Load capacity of output +10 V:	10 mA	
Power supply		
Supply terminals:	Un+, GND	
Supply voltage:	12-24 V DC stabilized	
Max. power without load:	0.8 W	
Connection		
Terminal:	max 1x2.5, max 2x1.5/ with sleeve max. 1x2.5 mm²	
Operating conditions		
Operating temperature:	-20 up to + 50 °C	
Storing temperature:	-30 up to + 70 °C	
Pollution degree:	2	
Operating position:	any	
Protection:	IP20 device, IP40 mounting in the switchboard	
Installation:	into a switchboard rail to DIN EN 60715	
Design:	3-MODULE	
Dimensions and weight		
Dimensions:	90 x 52 x 65 mm	
Weight:	130 g	


* Max Tightening Torque for antenna connector is 0.56 Nm.

Attention:
The minimum distance between the controller (system unit) and the actua-
tor must not be less than one centimeter.
Between the individual commands must be an interval of at least 1s.

- The dimmer for LED strips is used for independent control of 3 single-
color LED strips or one RGB LED strip.
- The expanded selection of control modes enables it to be combined with:
a) Controllers and System units iNELS RF Control
b) control signal 0(1) - 10 V
c) connecting to iNELS BUS using DAC converters.
- The unit's three-module design with switchboard mounting enables
connection of dimmed load 3 x 5A, which represents:
a) single-color LED strip 7.2W (ELKO Lighting) – 3 x 8 m
b) RGB LED strip 14.2 W (ELKO Lighting) – 10 m.
- 6 light functions - smooth increase or decrease with time setting 2s - 30 min.
- When switched off, the set level is stored in the memory, and when
switched back on, it returns to the most recently set value.
- The dimmer may be controlled by up to 25 channels (1 channel repre-
sents 1 button on the controller).
- The power supply of the unit is in the range of 12 - 24 V DC, and is
indicated by a green LED.
- The package includes an internal antenna AN-I , in case of locating the
unit in a metal switchboard, you can use the external antenna AN-E for
better signal reception.
- Range up to 160 m (in open space), if the signal is insufficient between
the controller and unit, use the signal repeater RFRP-20 or protocol
component RFIO² that support this feature.
- For components labelled as iNELS RF Control² (RFIO²), it is possible to
set the repeater function via the RFAF / USB service device.
- Communication frequency with bidirectional protocol iNELS RF Con-
trol² (RFIO²).

Connection


Output variations

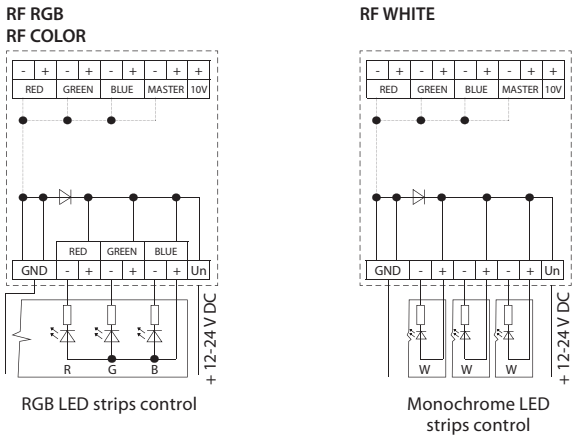

Control modes

RF RGB


Switch settings in MODE:

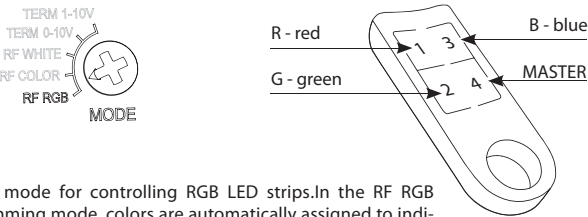

RF RGB mode for controlling RGB LED strips.In the RF RGB
programming mode, colors are automatically assigned to indi-
vidual transmitter buttons.
Note: The mode can be controlled by iHC application, EST3,
WSB3, GSB3, IM3 module and RFWB with RFIO² protocol.

RF WHITE


Switch settings in MODE:



This works in a mode where it acts like three independent dimmers for 12-24V. Each
channel can be programmed independently of one another and has its own address.
Note: The mode can be controlled by iHC application, EST3, WSB3, GSB3, IM3 module
and RFWB with RFIO² protocol.

RF COLOR

Switch settings in MODE:

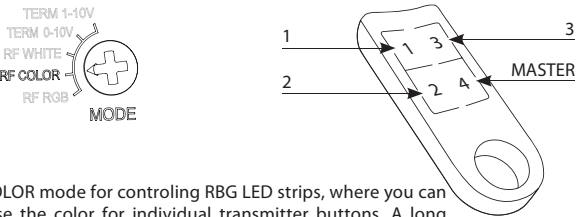

RF COLOR mode for controlling RBG LED strips, where you can
choose the color for individual transmitter buttons. A long
press of the button starts the color search mode. After releas-
ing the button, the current color is set for the given button.
Note: The mode can be controlled by iHC application, EST3,
WSB3, GSB3, IM3 module and RFWB with RFIO² protocol.


TERM 0-10V and TERM 1-10V

Switch settings in MODE:



Modes TERM 0 -10V and TERM 1-10V.Inputs 0-10V and 1-10V used to control one
RGB LED strip or three independent single-color LED strips from the iNELS BUS
System. The mode can be controlled by iHC application, EST3, WSB3, GSB3, IM3
module and RFWB with RFIO² protocol.

Control options of monochromatic RGB LED strips from iNELS BUS System

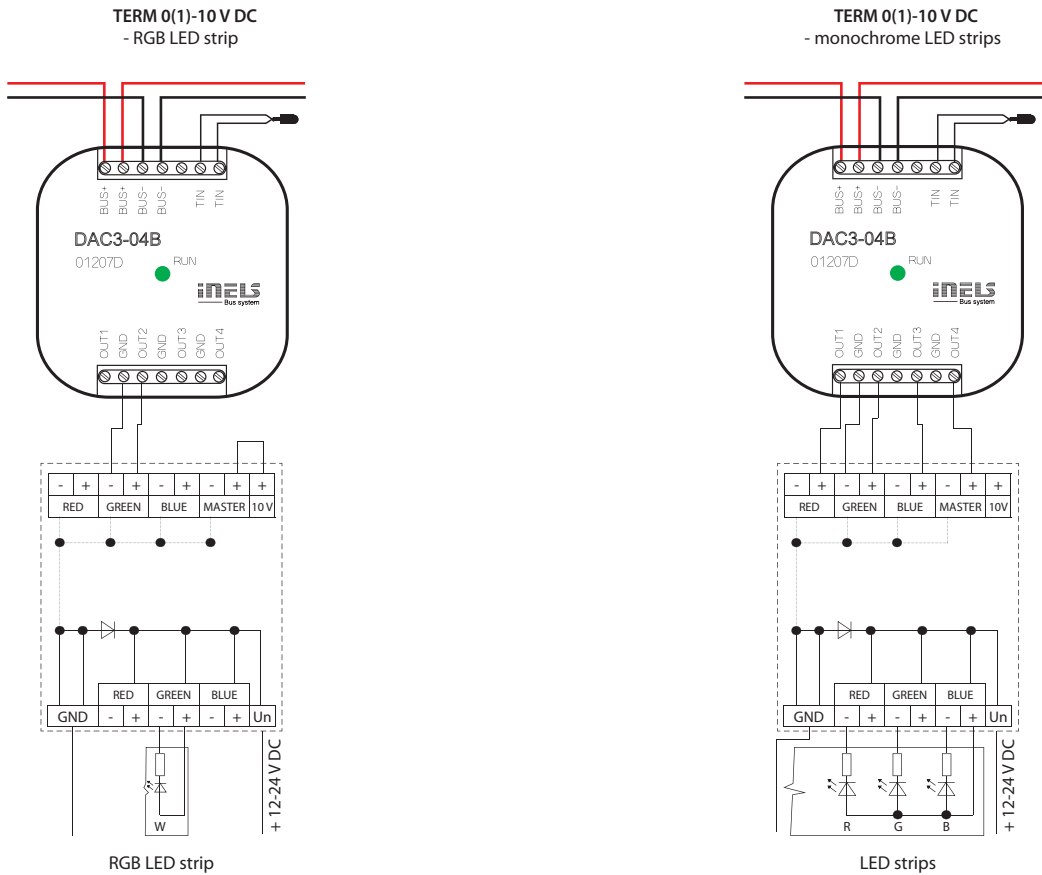

EAN code
DCDA-33M: 8595188146807



Technical parameters		DCDA-33M
Power supply		
Supply terminals:		Un+, GND
Supply voltage:		12 - 60 V
Consumption:		min. 0.5 W, max. 165 W
Supply voltage from BUS / tolerance:		27V DC, -20 / +15 %
Dissipated power:		max. 2 W
Outputs		
Dimming load:		LED chips controlled by variable streams or alternatively multiple LED chips connected in series *
Number of channels:		3
Rated current:		350 mA - 2 A
Output power:		3x 50 W
Output voltage:		6.5 - 55 V
Switching voltage:		Un
Output indication		LED OUT1, OUT2, OUT3
- light:		ON
- short:		flashing
- no light:		OFF
Control		
DALI:		1200 bit/s, 250 mA
BUS:		compatible with iNELS3, consumption < 4 mA
DMX:		250 kbit/s, 512 channels, control RGB(M) 3(4) channels
Operating conditions		
Relative humidity:		max. 80 %
Operating temperature:		-20°C to +55°C
Storage temperature:		-30°C to +70°C
Protection degree:		IP20 device, IP40 mounitg in the switchboard
Overvoltage category:		II.
Pollution degree:		2
Operating position:		vertical
Installation:		into switchboard on DIN rail EN60715
Implementation:		3-MODULE
Dimensions and weight		
Dimensions:		90 x 52 x 65 mm
Weight:		135g

* for more information, see our manual.

Setting the DIP switches

Setting the DALI communication interface - Switch 1 and 2.


Setting the BUS communication interface - Switch 1 and 2.

Setting the DMX communication interface - Switch 1.

Setting address - Switch 2-10.

- DCDA-33M is a dimming unit designed to dim single-color and RGB LED light sources controlled by variable current.
- The actuator has three independent channels and each output channel is individually addressable and controllable.
- DCDA-33M actuator can be controlled from the BUS, DALI or DMX.
- When controlling the unit from the BUSes and DMX, also the fourth virtual channel can be supported to control overall brightness (BUS – set in iDM3, DMX – set by long press of the PRG button).
- DCDA-33M can directly control from the system iNELS where the communication interface is the installation BUS.
- If for controlling, a communication interface DALI or DMX is used, it is possible to use the master unit EMDC-64M.
- The supply voltage of the dimming unit must be at least 4V higher than the expected output voltage on the load.
- Setting the communication interface and addresses of actuators is performed using DIP switches:
 - a) switch No. 1
 - In the upper position determines DALI or BUS
 - In the lower position determines DMX
 - b) switch No. 2 (if that switch 1 is in the upper position)
 - In the upper position determines DALI
 - In the lower position determines BUS
- Using the control buttons on the front panel, you can manually control the output.
- The input circuits of communication interfaces are optically isolated from the supply voltage connected lamp unit, and is therefore resistant to electromagnetic interference.
- DCDA-33M in 3-module is designed for panel mounting on DIN rail EN60715.

Connection

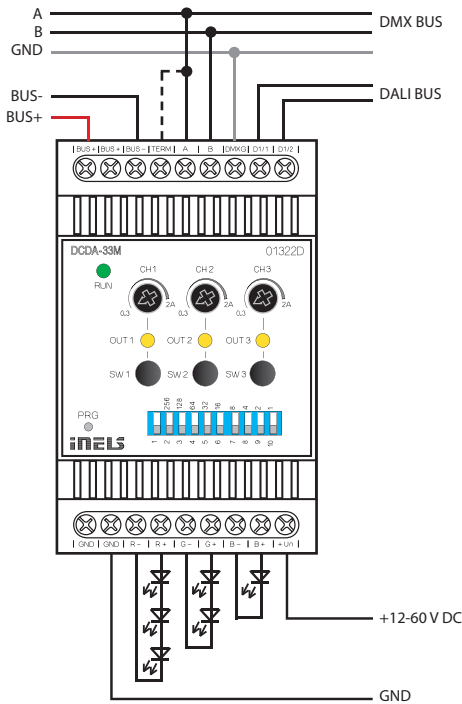


EAN code
IM3-140M: 8595188132459




Technical parameters		IM3-140M
Inputs		
Input:		14x NO or NC against GND (-) IN1 - IN7 -are balanced inputs
Max. frequency pulse reading:		20 Hz
Outputs		
Output (power supply 12V for sensors):		12 V DC/150 mA
Communication		
Installation BUS:		BUS
Data transfer indication:		green LED
Power supply		
Supply voltage / tolerance:		27 V DC, -20 / +10 %
Dissipated power:		max. 1 W
Rated current:		25 mA (at 27V DC), from BUS
Rated current for full load on output 12 V DC:		100 mA
Connection		
Terminal:		max. 2.5 mm²/1.5 mm² with sleeve
Operating conditions		
Air humidity:		max. 80 %
Operating temperature:		-20 .. +55 °C
Storing temperature:		-30 .. +70 °C
Protection degree:		IP20 device, IP40 mounting in the switchboard
Overvoltage category:		II.
Pollution degree:		2
Operating position:		any
Installation:		into a switchboard rail to DIN EN 60715
Design:		3-MODULE
Dimensions and weight		
Dimensions:		90 x 52 x 65 mm
Weight:		104 g

Balanced input

Simple:

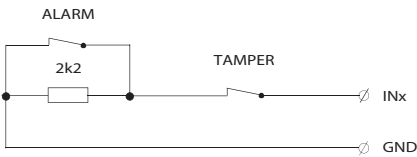


Double:

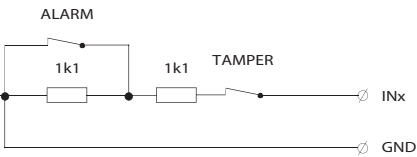

- Binary input unit IM3-140M is designed to connect up to 14 devices with potentialless contact (such as switches, buttons of other designs, fire and glass detectors and others).
- Inputs IN1 - IN7 can be balanced.
- Contacts of external devices connected to the inputs of the drive can be NO or NC - Input parameters are configured in the software iDM3.
- Inputs must be configured as balanced or double balanced - in an internal Electronic security system configured in iDM3 software.
- The unit generates a supply voltage of 12 V DC / 150 mA for powering external detectors, so it can power PIR detectors, fire and gas detectors.
- Active use 12 V DC output for powering detectors increases the nominal consumption units from BUS (see technical data).
- The unit can be used for counting pulses of energy meters with pulse output.
- IM3-140M in 3-module is designed for switchboard mounting on DIN rail EN60715.

Connection

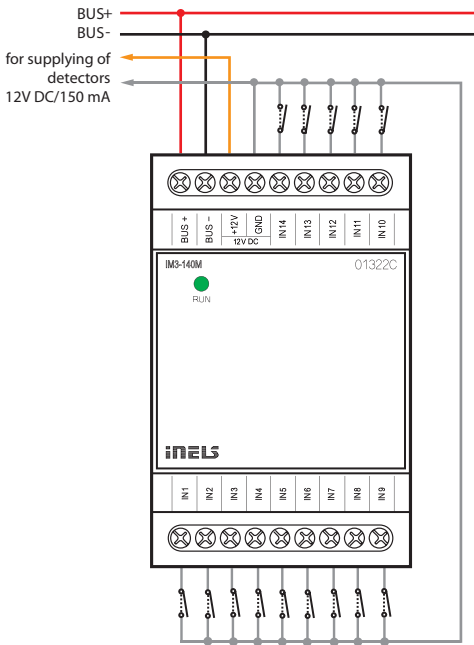



EAN code
IM3-20B: 8595188132305
IM3-40B: 8595188132312
IM3-80B: 8595188132329


Technical parameters				IM3-20B	IM3-40B	IM3-80B
Inputs						
Input:		2x*		4x*		8x*
		IN1, IN2**		IN1, IN2**		IN1- IN5**
Max. frequency pulse reading:		20 Hz				
Temperature measuring:		Yes, input for external thermo sensor TC/TZ				
Range /accuracy of thermomeasuring:		-20 to +120°C / 0.5°C from the range				
Outputs						
Output voltage / current:		12 V DC/75 mA, for supplying EZS sensors				
Communication						
Installation BUS:		BUS				
Status indication unit:		green LED RUN				
Power supply						
Supply voltage / tolerance:		27 V DC, -20 / +10 %				
Dissipated power:		max. 1 W				
Rated current:		20 mA (at 27V DC), from BUS				
Rated current of unit for full load on output 12 V DC:						
		60 mA			100 mA	
Connection						
Terminal:		0.5-1 mm ²				
Inputs:		4x conductors CY, profile 0.75mm ² , length 90mm		6x conductors CY, profile 0.75mm ² , length 90mm		x
Operating conditions						
Operating temperature:		-20 to +55 °C				
Storing temperature:		-30 to +70 °C				
Protection degree:		IP30				
Overvoltage category:		II.				
Pollution degree:		2				
Operating position:		any				
Installation:		into installation box				
Dimensions and weight						
Dimensions:		49 x 49 x 13 mm				
Weight:		30 g		32 g		27 g

* NO or NC against GND(-)
** are balanced inputs


- Binary input units IM3-20B, IM3-40B and IM3-80B are used for connection of 2, 4 or 8 devices with potential-less contacts (switches, buttons, switches of other design, PIR detectors, fire and gas detectors, etc.).
- Part of the inputs can be used as a balanced for alarm detectors:
 - IM3-20B – inputs IN1, IN2
 - IM3-40B – inputs IN1, IN2
 - IM3-80B – inputs IN1 – IN5.
- Contacts of external devices connected to the inputs of the unit can be NO or NC - Input parameters are configured in the software iDM3.
- Within the internal EZS configured in the iDM3 software, inputs must be set to balance or double balance.
- The units generate a supply voltage of 12V DC / 75 mA for powering external intrusion detectors, so they can power PIR detectors, fire and gas detectors.
- Active use 12 V DC output for powering detectors increases the nominal consumption of units from BUS (see technical data).
- The units can be used for counting pulses of energy meters with pulse output.
- The units are equipped with a temperature input for connecting an external two-wire temperature sensor TC/TZ (see accessories).
- IM3-20B, IM3-40B, IM3-80B in case type B are designed for mounting into a installation box.

Connection


IM3-20B

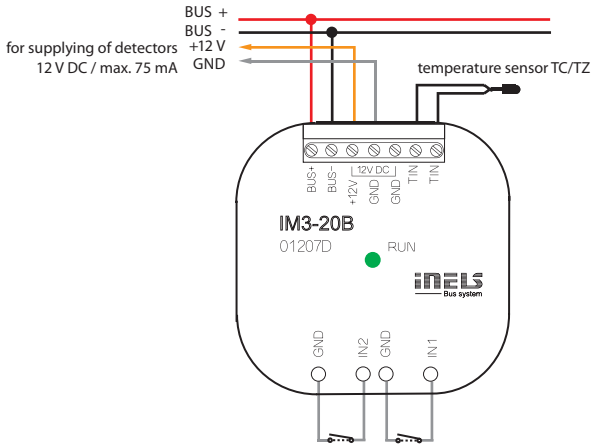

IM3-40B

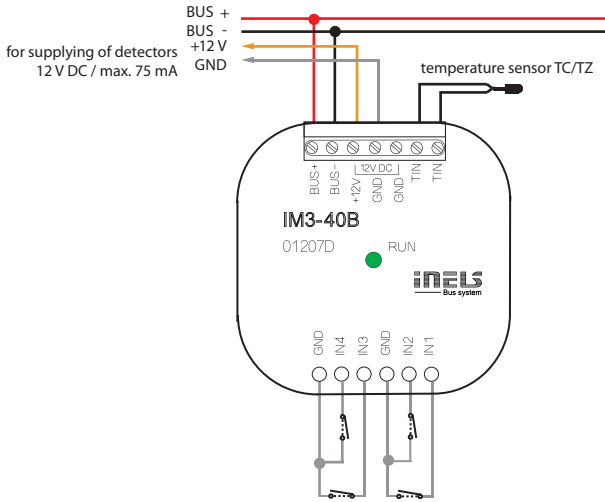


IM3-80B

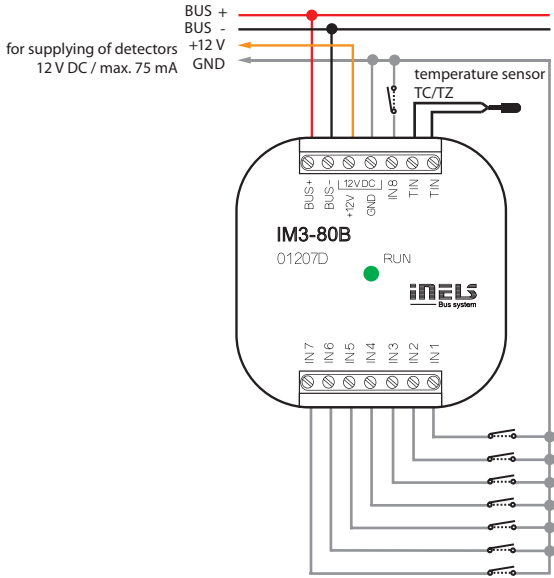


Balanced input

Simple:

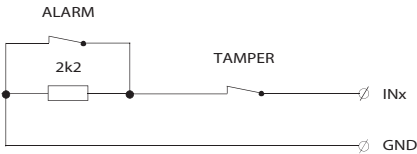

Double:

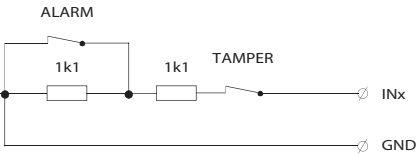



EAN code
TI3-10B: 8595188132886
TI3-40B: 8595188132695

Technical parameters		TI3-10B	TI3-40B
Input			
Temperature input for temperature measuring:	1x inputs for external thermo sensor *	4x inputs for external thermo sensor*	
Emperature measurement range:	by type of sensor, prob from -50°C to 400°C		
Converter resolution:	15 bit		
Communication			
Installation BUS:	BUS		
Status indication unit:	green LED RUN		
Power supply			
Supply voltage / tolerance:	27 V DC, -20 / +10 %		
Dissipated power:	max. 1 W		
Rated current:	20 mA (at 27V DC), from BUS		
Connection			
Terminal:	0.5 mm ² - 1 mm ²		
Operating conditions			
Operating temperature:	-20 .. +55 °C		
Storing temperature:	-30 .. +70 °C		
Protection degree:	IP30		
Overvoltage category:	II.		
Pollution degree:	2		
Operating position:	any		
Installation:	into installation box		
Dimensions and weight			
Dimensions:	49 x 49 x 13 mm		
Weight:	27 g	27 g	

*TC, TZ, Ni1000, Pt1000, Pt100, see accessories

Connection options

2-wire



- it is necessary to connect terminals TIN_B and COM

3-wire

- connection of the sensor needs to be done according to the technical specifications

- These units are designed for connection of one (TI3-10B) to four (TI3-40B) external temperature sensors.
- Units range TI3 support the connection of the following temperature sensors:
 - TC / TZ - 2-wire connections
 - Ni1000, Pt1000, Pt100 - 2-wire and 3-wire connections.
- Used in when necessary to take temperatures from different places (for example large floor heating – diagonal layout of sensors, floor/ space, indoor/outdoor temperature, technological device – boiler, so-lar heating etc.)
- Status of units indicated by green RUN LED on the front panel:
 - If the supply voltage is connected (units are powered via the BUS), but there is no communication with the master, RUN LED is lit continuously.
 - If the supply voltage is connected and the unit communicates via standard BUS, RUN LED flashes.
- TI3-10B, TI3-40B in version B is designed for mounting into an instal-lation box.

Connection

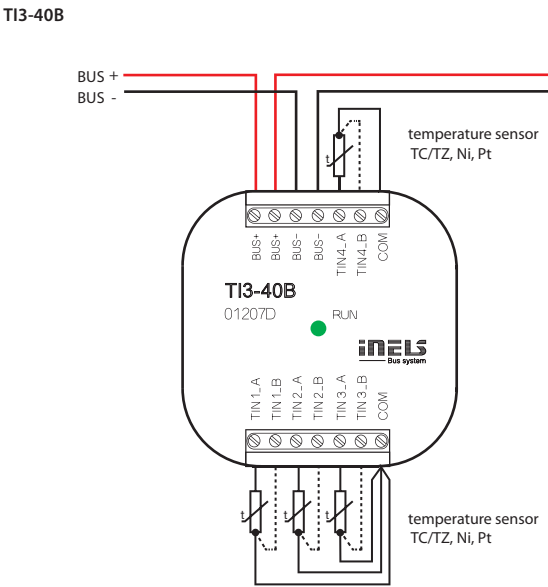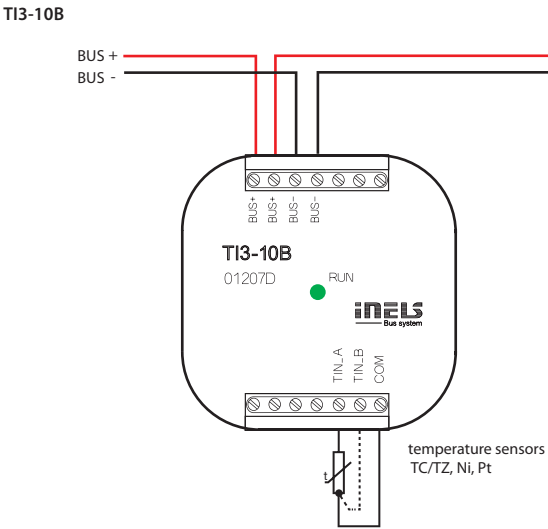

EAN code
TI3-60M: 8595188132893

Technical parameters	TI3-60M
Inputs	
Temperature input for temperature measuring:	6x input for external temperature sensor TC, TZ, Ni1000, Pt1000, Pt100 see accessories
Temperature measurement range:	by type of sensor, probe from -50°C to 400°C
Converter resolution:	15 bit
Indication of exceeding the range or interruption of the sensor:	6x red LED
Communication	
Installation BUS:	BUS
Status indication unit:	green LED RUN
Power supply	
Supply voltage / tolerance:	27 V DC, -20 / +10 %
Dissipated power:	max. 1 W
Rated current:	45 mA (at 27V DC), from BUS
Connection	
Terminal:	max. 2.5 mm ² /1.5 mm ² with sleeve
Operating conditions	
Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20 device, IP40 mounting in the switchboard
Overvoltage category:	II.
Pollution degree:	2
Operating position:	any
Installation:	into a switchboard rail to DIN EN 60715
Design:	3-MODULE
Dimensions and weight	
Dimensions:	90 x 52 x 65 mm
Weight:	111 g

Connection options

2-wire


- it is necessary to connect terminals TIN_B and COM

3-wire

- connection of the sensor needs to be done according to the technical specifications

- Unit TI3-60M is designed to connect up to six external temperature sensors.
- Units range TI3 support the connection of the following temperature sensors:
 - TC / TZ - 2-wire connections
 - Ni1000, Pt1000, Pt100 - 2-wire and 3-wire connections.
- It is used in cases where it is necessary to read the temperature, eg floor/room, indoor/outdoor temperature, process equipment - boiler, solar heating, etc.
- Unit status is indicated by green RUN LED on the front panel:
 - If the supply voltage is connected (the unit is powered via the BUS), but there is no communication with the master, RUN LED is lit continuously.
 - If the supply voltage is connected and the unit communicates via standard BUS, RUN LED flashes.
- The status on individual temperature inputs is indicated by the relevant red LED on the front panel:
 - LIT - temperature sensor disconnection
 - FLASHES - exceeding of the temperature range
 - UNLIT - ok.
- TI3-60M in 3-module is designed for switchboard mounting on DIN rail EN60715.

Connection

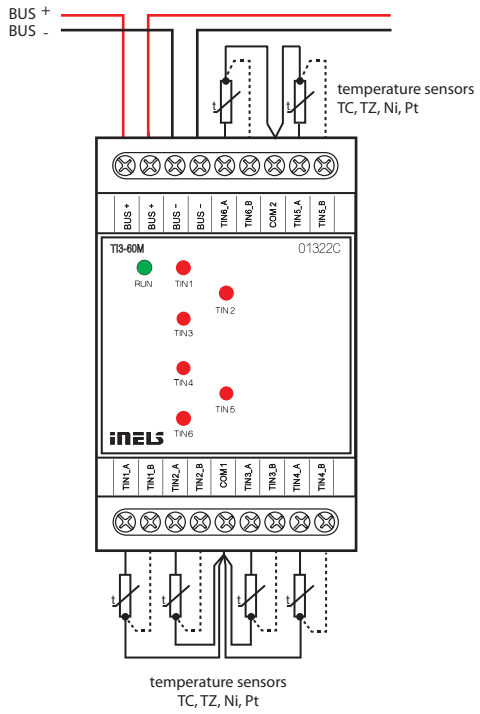




EAN code
ADC3-60M: 8595188133012

Technical parameters		ADC3-60M
Input		
Analog inputs:		6x voltage, current or temperature input
Number of inputs:		6
Galv. separation from inner circuits:		No
Diagnostic:		indication (exceeding the range, interruption of a sensor or overload of Uref output) by the applicable red LED
Common terminal:		COM
Converter resolution:		14 bits
Input resistance		
- for voltage ranges:		approx. 150 kΩ
- for current ranges:		100 Ω
Types of inputs / measuring ranges*:		Voltage (U): 0 ÷ +10 V (U) ; 0 ÷ +2 V (U) Current (I) : 0 ÷ +20 mA (I) ; ÷ +20 mA (I) temperature: input at ext. temperature sensor TC, TZ see accessories / according to used sensor from -40°C to 125°C
Outputs of the Uref1 and Uref2 voltage		
Voltage** / current of Uref1:		10 or 15 V DC / 100 mA
Voltage** / current of Uref2:		10 V DC / 20 mA
Communication		
Installation BUS:		BUS
Unit status indication:		green LED RUN
Power supply		
Supply voltage / tolerance:		27 V DC, -20 / +10 %
Dissipated power:		max. 1 W
Rated current:		100 mA (at 27V DC), from BUS
Connection		
Terminal:		max. 2.5 mm²/1.5 mm² with sleeve
Operating conditions		
Operating temperature:		-20 to +55°C
Storing temperature:		-30 to +70°C
Protection degree:		IP20 device, IP40 mounting in the switchboard
Overvoltage category:		II.
Pollution degree:		2
Operating position:		any
Installation:		into a switchboard rail to DIN EN 60715
Design:		3-MODULE
Dimensions and weight		
Dimensions:		90 x 52 x 65 mm
Weight:		112 g

* selectable for each input/output individually by configuration in the user program iDM3. Min. supply voltage 24 V DC must be respected when configuring 15 V DC and 100 mA consumption.
** according to load Uref output.

- ADC3-60M is an analog-to-digital converter and is equipped with 6 analog inputs.
- Analog inputs serve to connect temperature sensors or analog sensors that generates current or voltage signal.
- The analog inputs have a resolution of a 14-bit AD converter.
- The analog inputs have a common terminal COM.
- Analog inputs / ouputs are configurable in iDM3 independently as voltage (U) or current (I) or temperature.
- We recommend Clima sensor as a meteo station. There are four types: five to eight outputs. The top series offers measuring of: rainfall, brightness, twilight, speed of wind, temperature and relative humidity.
- The red LEDs in the front panel indicate exceeding the range, interruption of a sensor or overload of Uref output.
- The temperature inputs at the top of the terminal are used to connect the following temperature sensors: TC, TZ.
- ADC3-60M in 3-MODULE version is designed for mounting into a switchboard, on a DIN rail EN60715.

Connection

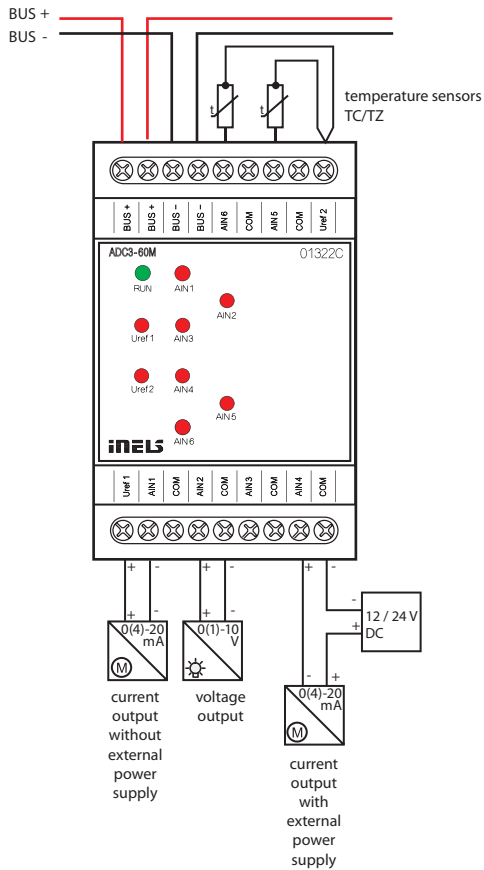


EAN code
DAC3-04M: 8595188132565

Technical parameters		DAC3-04M
Input		
Temperature measuring:		YES, input for external temperature sensor TC/TZ
Range / accuracy of temp. measuring:		-20 to +120°C; 0.5°C from the range
Outputs		
Analog voltage output / rated current:		4x 0(1)-10 V/10 mA
Indication of output overload:		red LED OVERLOAD
Communication		
Installation BUS:		BUS
Status indication unit:		green LED
Power supply		
Supply voltage / tolerance:		27 V DC, -20 / +10 %
Dissipated power:		max. 1 W
Rated current:		50 mA (at 27V DC), from BUS
Connection		
Terminal:		max. 2.5 mm²/1.5 mm² with sleeve
Operating conditions		
Air humidity:		max. 80 %
Operating temperature:		-20 to +55 °C
Storing temperature:		-30 to +70 °C
Protection degree:		IP20 device, IP40 mounting in the switchboard
Overvoltage category:		II.
Pollution degree:		2
Operating position:		any
Installation:		switchboard on DIN rail EN 60715
Design:		3-MODULE
Dimensions and weight		
Dimensions:		90 x 52 x 65 mm
Weight:		108 g

- DAC3-04M is a converter from a digital signal to an analog voltage signal.
- The converter generates 4 analog voltage signals, which can be operated, according to type of controlled device, in a range 0-10 V or 1-10 V.
- This is used for regulating and controlling devices that may be controlled by this signal (dimmmable ballasts of fluorescent lamps and other types of light sources - e.g. LED panels from the assortment of ELKO Lighting, dimming actuator for LED and RGB strips RFDA-73M/RGB, thermostatic heads, servo drives, elements for measuring and regulation and others).
- Range of output voltage is adjustable in iDM3.
- Converter is equipped with a temperature input for connecting a 2-wire external sensor TC/TZ (see accessories).
- DAC3-04M in 3-MODULE version is designed for mounting into a switchboard, on DIN rail EN60715.

Connection

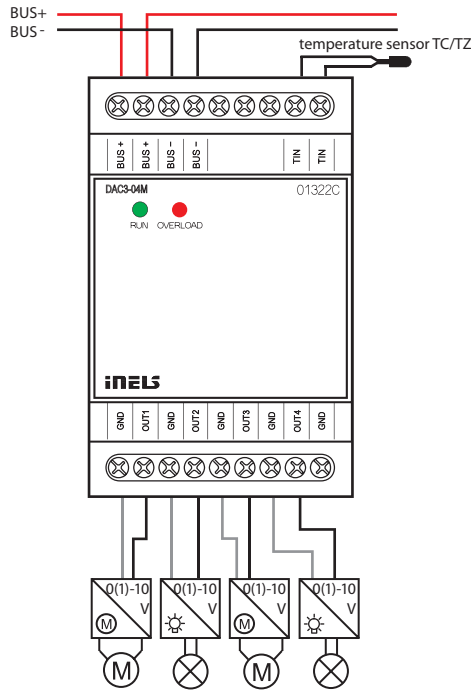




EAN code
DAC3-04B: 8595188132572

Technical parameters		DAC3-04B
Inputs		
Temperature measuring:	YES, input for external temperature sensor TC/TZ	
Range / accuracy of temp. measuring:	-20 to +120°C; 0.5°C from the range	
Outputs		
Analog voltage output / rated current:	4x 0(1)-10 V/10 mA	
Communication		
Installation BUS:	BUS	
Status indication unit:	green LED RUN	
Power supply		
Supply voltage / tolerance:	27 V DC, -20 / +10 %	
Dissipated power:	max. 1 W	
Rated current:	50 mA (at 27 V DC), from BUS	
Connection		
Terminal:	0.5 - 1 mm²	
Operating conditions		
Operating temperature:	-20 to +55 °C	
Storing temperature:	-30 to +70 °C	
Protection degree:	IP30	
Overvoltage category:	II.	
Pollution degree:	2	
Operating position:	any	
Installation:	into installation box	
Dimensions and weight		
Dimensions:	49 x 49 x 13 mm	
Weight:	27 g	

- DAC3-04B is converter of a digital signal to an analog voltage signal.
- The converter generates 4 analog voltage signals, which can be regulated according to type of controlled device, in a range 0-10 V or 1-10 V.
- This is used for regulating and controlling devices that may be controlled by this signal (dimmable ballasts of fluorescent lamps and other types of light sources - e.g. LED panels from the assortment of ELKO Lighting, dimming actuator for LED and RGB strips RFDA-73M/ RGB, thermostatic heads, servo drives, elements for measuring and regulation and others).
- Range of output voltage is adjustable in iDM3.
- DAC3-04B is equipped with a temperature input for connecting a 2-wire external sensor TC / TZ.
- DAC3-04B in version B is designed for mounting into an installation box.

Connection

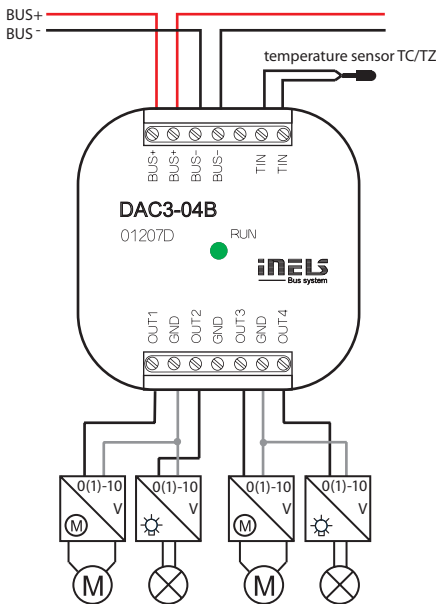

EAN code
FA3-612M: 8595188135276


Technical parameters		FA3-612M
Input		
Analog inputs:	3x voltage, current or temperature input	
Number of inputs:	3	
Galv. separation from inner circuits:	No	
Diagnostic:	indication red LED OVERRANGE (exceeding the range, interruption of a sensor or overload of Uref output)	
Common terminal:	GND	
Converter resolution:	14 bits	
Input resistance		
- for voltage ranges:	approx. 150 kΩ	
- for current ranges:	100 Ω	
Types of inputs / measuring ranges*:	Voltage (U): 0 ÷ +10 V (U) ; 0 ÷ +2 V (U) Current (I): 0 ÷ +20 mA (I) ; ÷ +20 mA (I) temperature: input at ext. temperature sensor TC, TZ, Ni1000**, Pt1000**, Pt100** see accessories / according to used sensor from -30°C to 250°C	
Digital inputs:		
Input voltage:	20 - 240 V AC (50 - 60 Hz) / DC	
Galv. separation from internal circuits:	Yes	
Common lead:	GO COM3	
Outputs		
Analog:	4x (A_OUT1 - A_OUT4)	
Voltage analog. output / max. Current:	4x 0(1) - 10 V / 10 mA	
Uref reference voltage outputs		
Voltage / Current Uref:	10 V DC / 100 mA	
Output overload indication:	red LED OVERLOAD	
SSR (Electronic Relay):	4x (VALVE1 - VALVE2)	
Switching voltage:	20 - 240 V AC	
Switching capacity:	480 VA	
Peak current:	20 A, t ≤ 16 ms	
Output indication:	yellow LED	
Relay 6A:	4x (FAN1-FAN3, RE)	
Switching voltage:	250 V AC1, 24 V DC	
Switching capacity:	1500 VA / AC1; 300 VA / AC15; 180 W/DC, AC3	
Relay outputs separated from from all internal circuits:	reinforced Insulation (Cat. II surges by EN 60664-1)	
Minimum switching load:	500 mW (12 V / 10 mA)	
Mechanical life:	10x10 ⁵	
Electrical life AC1:	6x10 ⁴	
Output indication:	yellow LED	
Communication		
Installation BUS:	BUS	
Status indication unit:	green LED RUN	
Power supply		
Supply voltage / tolerance / rated current:	27 V DC, -20 / +10 %, 5 mA	
Supply voltage of power section (relay) tolerance / nominal current:	AC 230V (50 Hz), -15 / +10 %, 20 mA	
Dissipated power:	max. 1 W	

- FA3-612M is a unit (actuator) designed to control fan coil units using analogue / digital inputs and analog / relay outputs.
- Analog inputs for temperature, voltage or current measurement (Uref reference voltage can also be used).
- The digital inputs are galvanically isolated with positive logic (Sink) in the 24-230V AC / DC voltage range.
- Analog outputs 0-10V.
- Connection to the installation BUS.
- Buttons for closing / opening the valve, fan and heating relay.
- The LEDs on the front panel indicate FAN, RE, VALVE1, VALVE2, OVER-RANGE, and OVERLOAD status.
- FA3-066M in 6-MODULE version is designed for mounting into a switchboard, on DIN rail EN60715.

Connection

Terminal:	max. 2.5 mm²/1.5 mm² with sleeve
Operating conditions	
Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20 device, IP40 mounting in the switchboard
Overvoltage category:	II.
Pollution degree:	2
Operating position:	any
Installation:	switchboard on DIN rail EN 60715
Design:	6-MODULE
Dimensions and weight	
Dimensions:	90 x 105 x 65 mm
Weight:	307 g

Connection

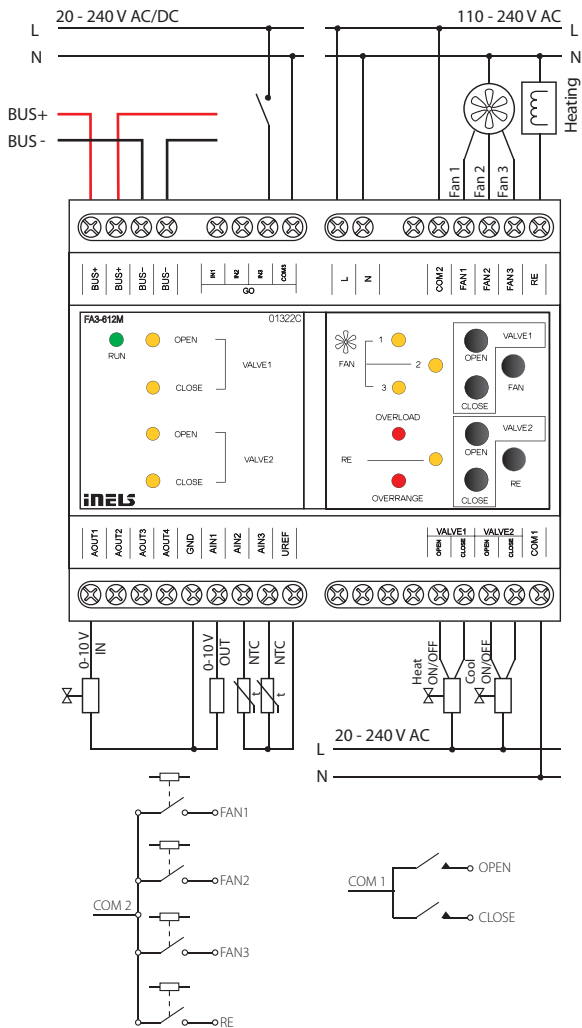

* selectable for each input individually by configuration in the user program iDM3.

** The FA3-612M / Pt version is available for these sensors.




EAN code*

Technical parameters		EST3
Display		
Type:	colored TFT LCD	
Aspect ratio:	3:4	
Visible area:	52.5 x 70 mm	
Backlight:	active	
Touchpad:	4-wire resistive	
Display:	3.5"	
Number of points:	240 x 320	
Color Depth:	16.7M (24 bit color)	
Power supply		
Supply voltage / tolerance:	27 V DC, -20 / +10 %	
Dissipated power:	max. 2 W	
Rated current:	150 mA (at 27V DC)	
Connection		
Connection:	terminals	
Connecting conductors profile:	max. 2.5mm ² /1.5mm ² with sleeve	
Operating conditions		
Operating temperature:	0 to +55°C	
Storing temperature:	- 20 to +70°C	
Protection degree:	IP20	
Overvoltage category:	II.	
Pollution degree:	2	
Operating position:	any	
Installation:	installation box	
Dimensions and weight		
Dimensions:	94 x 94 x 36 mm	
Weight:	120 g	



* Ordering codes of all colours are available in the iNELS price list.
** Weight is listed with plastic frame.

- The control unit with touch screen EST3 is a suitable control element of the iNELS system in places where it is necessary to control multiple devices. The unit replaces several drivers and enables minimizing the number of switches on the wall.
- EST3 features a 3.5 "color touchscreen with an aspect ratio of 3:4. The basic display resolution is 240 x 320 pixels. The color depth of 16.7 million colors (24 bit color, True Color).
- Use the touch sensing surface to control configured buttons and symbols on the screen just by a light touch of a finger. Individual symbols on the screen are in the "Press" animated by the associated output in the system.
- EST3 has these screens (the displayed screens can be set in iDM3):
 - Buttons screen
 - Temperature control screen
 - Control RGB/RGBY/RGBW light sources screen
- Selecting the default screen is possible from the iDM3 software.
- For screen of buttons one of four different matrixes buttons can be used - 2x2, 2x3, 3x3 and 3x4. Matrix selection can be done from the iDM3 software. On the screen can then be used up to 12 buttons to control appliances or scenes.
- In the menu settings, directly on the EST3 component one of 48 prepared symbols (for control of lighting, shading, scenes and other technologies) can be assigned to each button or the buttons can be used to enter text (number of characters depends on the matrix of buttons and therefore the size of the buttons).
- The temperature regulation screen enables coordination of the temperature of the selected heating circuit in a range of ± 3 , ± 4 or ± 5 °C (in relation to settings in iDM3).
- The virtual wheel can be used for temperature correction, where you can drag your finger across the screen to control the temperature by half a degree Celsius.
- The temperature correction can also be used instead of the virtual wheel symbols "+" and "-" .
- EST3 units do not have an integrated temperature sensor, or terminals for connection to an external temperature sensor. Within the iDM3 software, it is possible to assign any unit of heat input system iNELS.
- The control RGB/RGBY/RGBW light sources screen allows you to comfortably control your RGB/RGBY/RGBW light sources and adjust the luminous atmosphere as needed.
- For these RGB/RGBY/RGBW light sources , it is possible to use the controls on the screen to adjust the color and brightness. It is also possible to directly set the RGB/RGBY/RGBW illumination light source into white color.
- Located in the left upper corner of the screen are 4 indicators that can signal the status of any logical input / output in the iNELS system.
- In iDM3 it is possible to define the displayed screen, the default screen, matrix of buttons, type RGB/RGBY/RGBW and a correction range for the temperature control.
- In the settings menu directly on the device EST3 it is possible to select the menu language, screen saver, sleep mode, brightness adjustment and symbols and texts for each button.
- EST3 are designed as LOGUS⁹⁰ devices (EST3 however cannot be placed into multi-frames with other devices in this design) and are intended for mounting to installation box.

Connection

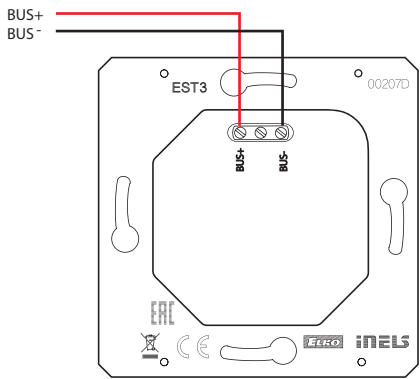

The screenshots

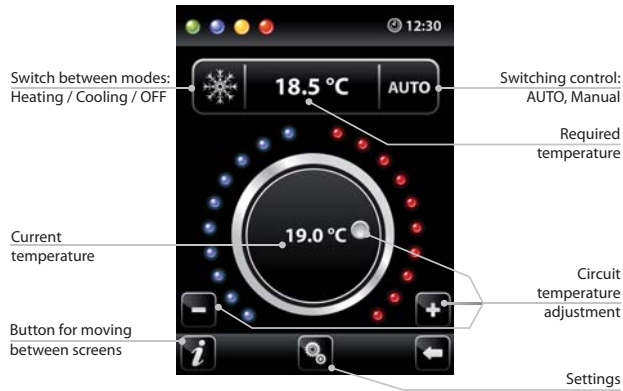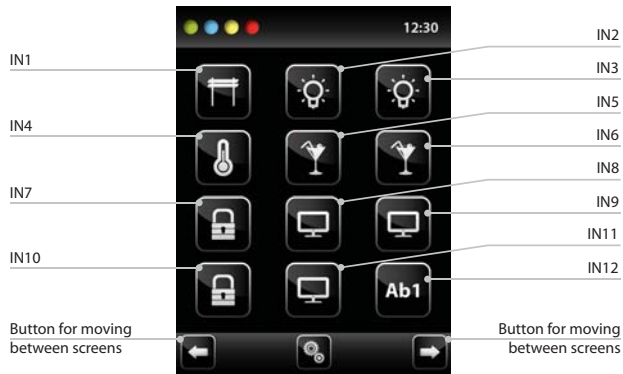

RGB lamp and light source control screen

- The RGB light sources control screen contains controls for managing the desired color and brightness of the RGB light sources.
- RGB control screen function is set up so that the colors R, G, B are bound together and simulate the signal level on analog inputs R, G, B and the resulting brightness of the lamp is linked to a simulated analog input 0 to 100%.
- The RGB control display is comprised of several elements and buttons.
 - A long press (touch) on the ON/OFF controls the central setting of RGB components and lamp brightness - on/off.
 - Buttons in the upper half of the screen are for setting the lamp brightness from 0-100% in 5% increments (see adjustable brightness indicator in %).
 - Buttons in the lower half of the screen are for setting the color comfort and accelerated lamp RGB control. The buttons have a lock function. When pressing "white illumination" button, the analog inputs are automatically set to the maximum value of individual color components, which appears as a resulting white light at the RGB light source output when these components are mixed. Then simply adjust the brightness intensity at the output. When pressing (touching) the button "RGB-based color illumination", the "white illumination" settings button locks.. Now the values of analog inputs of individual RGB color components are preset according to the set cursor in the color wheel of the RGB scale on the EST3.

Heating control screen


- On the temperature control screen, the temperature of the selected heating circuit can be corrected in the range of ± 3 , ± 4 or ± 5 °C.
- The virtual wheel can be used for temperature correction, where you can drag your finger across the screen to control the temperature by half a degree Celsius.
- The temperature correction can also be used instead of the virtual wheel symbols "+" and "-" .

Buttons screen

- Programming iNELS system functions on each button on the screen units EST3 is the same as programming other digital inputs or events for input or button units.
- Buttons can be configured as well as other inputs in the system, both for short and also long press (> 1.5 s).
- Buttons (icons) on the screen can be used instead of control outputs for visualization of one of the digital outputs of the system iNELS. This is made possible by assigning button to the desired output.
- In doing so, the button (icons) on the screen EST3 will become signal lamps (illuminated button), showing the state of the associated output.

Additional infromation


- Info gives information on the device and firmware version.
- Clicking the icon brings you to the settings menu, used to edit the EST3.
- The icon returns to the buttons panel.
- The system time is displayed in the upper right corner of the screen.
- All inputs and outputs on the EST3 unit can be freely programmed and parameterized using the iDM3 program.

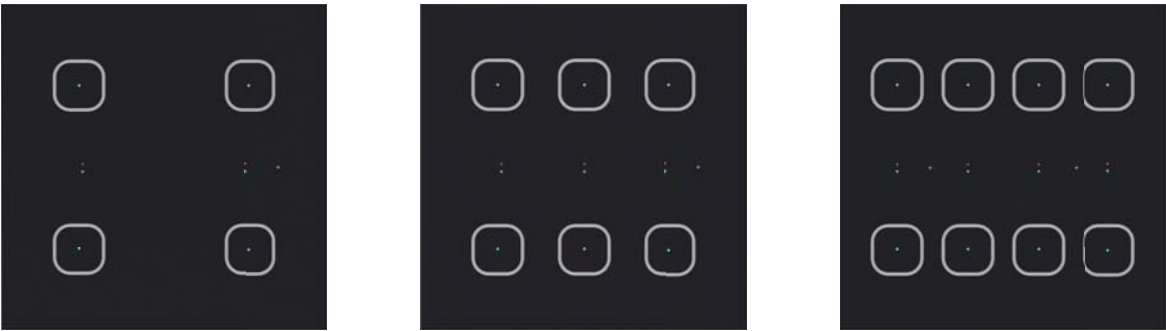

EAN code
GSB3-40/B: 8595188132909
GSB3-60/B: 8595188132916
GSB3-80/B: 8595188132923



Technical parameters		GSB3-40	GSB3-60	GSB3-80
Inputs				
Temperature measuring:	YES, built-in thermo sensor			
Scope and accuracy of temp. measuring:	0 to +55°C; 0.3°C from the range			
Number of control buttons:	4	6	8	
Inputs:	2x AIN/DIN			
Resolution:	according to the settings, 10 bits			
Ext. temperature sensor:	Yes, the connection between AIN1/DIN1 and AIN2/DIN2			
Type of ext. sensor:	TC/TZ			
Temperature measurement range:	-20°C to +120°C			
Temperature measurement accuracy:	0.5°C from range			
Outputs				
Indications:	pair of LEDs (red, green)			
Number of LED:	2	3	4	
Communication				
Installation BUS:	BUS			
Power supply				
Supply voltage / tolerance:	27 V DC, -20 / +10 %			
Dissipated power:	max. 0.5 W			
Rated current:	25 - 40 mA (at 27V DC), from BUS			
Connection				
Terminals:	0.5 - 1 mm²			
Operating conditions				
Relative humidity:	max. 80 %			
Operating temperature:	-20 to +55 °C			
Storing temperature:	-30 to +70 °C			
Protection degree:	IP20			
Overvoltage category:	II.			
Pollution degree:	2			
Operation position:	any			
Installation:	into installation box			
Dimensions and weight				
Dimensions:	94 x 94 x 36 mm			
Weight:	155 g			

- The wall controller with touch controls series GSB3 is a design element (controller) in the system iNELS with elegant and comfortable control. Controllers are available in black (e.g. GSB3-40/B) and white (e.g. GSB3-40/W) variants.
- Between each pair of touch buttons there is available a pair of indicator LEDs (green, red) to signal not only the status of the controlled appliances, but also the status of any sensor or actuator in the system.
- At the location of each touch button there is available a blue diode signaling the touching of the given button. Touching may be signaled by a vibration impulse or sound tone - selectable in the software iDM3.
- Controllers are 4-channels (GSB3-40), 6-channels (GSB3-60) and 8-channels (GSB3-80).
- All versions are in the same dimension as a basic modular wall-switch (94x94 mm).
- Each controller is equipped with a thermo sensor. It is equipped with two analog-digital inputs (AIN / DIN), and it is possible to connect two potentialless contact or an external temperature sensor TC / TZ. (for example on floor temperature measurement).
- Controllers are equipped with an ambient light intensity sensor. From the basic information from the sensor, it is possible to illuminate orientation blue diodes in the touch controls GSB3 or perform various actions in the software iDM3, e.g. illuminate light circuits in a hallway, etc.
- Advantages over conventional switches/buttons include space saving, signaling of any output system, the ability to measure temperature and also the ability to connect external buttons or detectors.
- Each channel(button) can control any actuator (appliance) in the system. It is also possible to program various functions or macro (set of functions) to each button. This allows you to control several appliances with one button simultaneously.
- Each button (channel) can have different functional modes beside lighting control:
 - a) Classic wall-switch:
 - upper button ON, bottom button OFF.
 - b) Button controller (impulse relay):
 - first press ON, second press OFF.
 - c) Dimmer:
 - short press – ON/OFF.
 - d) Time switch:
 - ON after press, automatically OFF after set time.
 - e) Setting light scenes – for example: for watching TV:
 - shutters down
 - main light 30% intensity
 - wall-lamps 50% intensity.
- Design series LOGUS⁹⁰ offers glass frames in black and white color. These frames goes perfectly with GSB3 wall buttons.

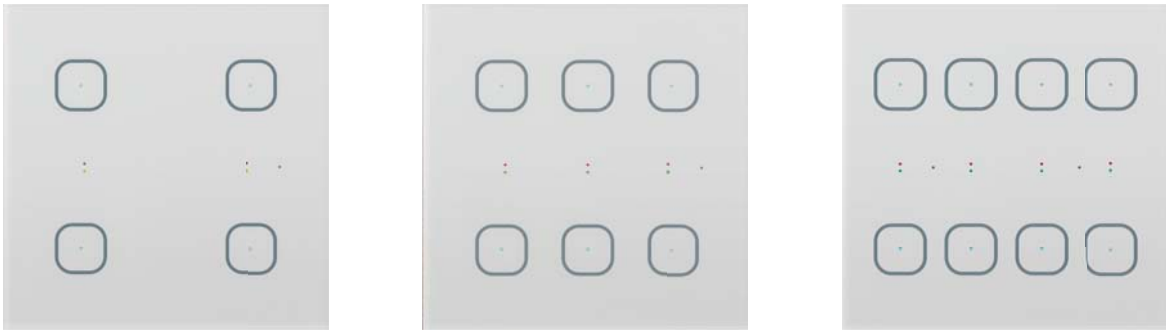

EAN code
GSB3-40/W: 8595188132954
GSB3-60/W: 8595188132985
GSB3-80/W: 8595188132992

Connection

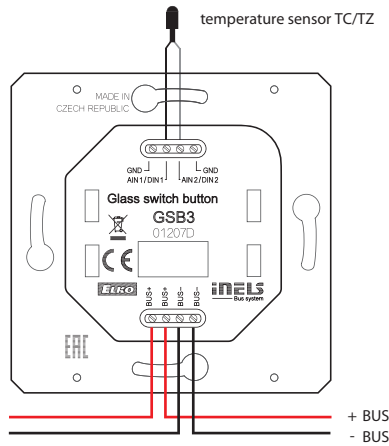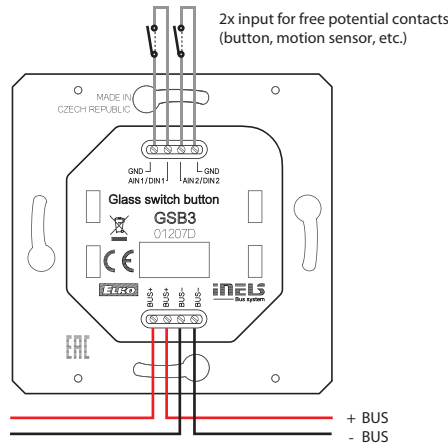

NEW



EAN code
GSB3-240/B: 8595188176309
GSB3-260/B: 8595188176347
GSB3-280/B: 8595188176385

Technical parameters		GSB3-240	GSB3-260	GSB3-280
Inputs				
Temperature measuring:	YES, built-in thermo sensor			
Scope and accuracy of temp. measuring:	0 to +55°C; 0.3°C from the range			
Number of control buttons:	4	6	8	
Inputs:	2x AIN/DIN			
Resolution:	according to the settings, 10 bits			
Ext. temperature sensor:	Yes, the connection between AIN1/DIN1 and AIN2/DIN2			
Type of ext. sensor:	TC/TZ			
Temperature measurement range:	-20°C to +120°C			
Temperature measurement accuracy:	0.5°C from range			
Outputs				
Indications:	pair of LEDs (red, green)			
Number of LED:	2	3	4	
Communication				
Installation BUS:	BUS			
Power supply				
Supply voltage / tolerance:	27 V DC, -20 / +10 %			
Dissipated power:	max. 0.5 W			
Rated current:	25 - 40 mA (at 27V DC), from BUS			
Connection				
Terminals:	0.5 - 1 mm²			
Operating conditions				
Relative humidity:	max. 80 %			
Operating temperature:	-20 to +55 °C			
Storing temperature:	-30 to +70 °C			
Protection degree:	IP20			
Overvoltage category:	II.			
Pollution degree:	2			
Operation position:	any			
Installation:	into installation box			
Dimensions and weight				
Dimensions:	94 x 94 x 36 mm			
Weight:	155 g			



- The wall controller with touch controls series GSB3 is a design element (controller) in the system iNELS with elegant and comfortable control. Controllers are available in black (e.g. GSB3-40/B) and white (e.g. GSB3-40/W) variants.
- Between each pair of touch buttons there is available a pair of indicator LEDs (green, red) to signal not only the status of the controlled appliances, but also the status of any sensor or actuator in the system.
- At the location of each touch button there is available a blue diode signaling the touching of the given button. Touching may be signaled by a vibration impulse or sound tone - selectable in the software iDM3.
- Controllers are 4-channels (GSB3-40), 6-channels (GSB3-60) and 8-channels (GSB3-80).
- All versions are in the same dimension as a basic modular wall-switch (94x94 mm).
- Each controller is equipped with a thermo sensor. It is equipped with two analog-digital inputs (AIN / DIN), and it is possible to connect two potentialless contact or an external temperature sensor TC / TZ. (for example on floor temperature measurement).
- Controllers are equipped with an ambient light intensity sensor. From the basic information from the sensor, it is possible to illuminate orientation blue diodes in the touch controls GSB3 or perform various actions in the software iDM3, e.g. illuminate light circuits in a hallway, etc.
- Advantages over conventional switches/buttons include space saving, signaling of any output system, the ability to measure temperature and also the ability to connect external buttons or detectors.
- Each channel(button) can control any actuator (appliance) in the system. It is also possible to program various functions or macro (set of functions) to each button. This allows you to control several appliances with one button simultaneously.
- Each button (channel) can have different functional modes beside lighting control:
 - a) Classic wall-switch:
 - upper button ON, bottom button OFF.
 - b) Button controller (impulse relay):
 - first press ON, second press OFF.
 - c) Dimmer:
 - short press – ON/OFF.
 - d) Time switch:
 - ON after press, automatically OFF after set time.
 - e) Setting light scenes – for example: for watching TV:
 - shutters down
 - main light 30% intensity
 - wall-lamps 50% intensity.
- Design series LOGUS⁹⁰ offers glass frames in black and white color. These frames goes perfectly with GSB3 wall buttons.

NEW



EAN code
GSB3-240/W: 8595188176316
GSB3-260/W: 8595188176354
GSB3-280/W: 8595188176392

Connection

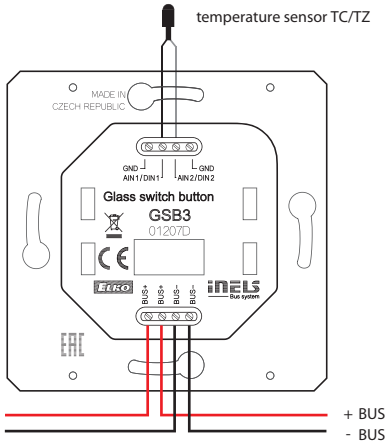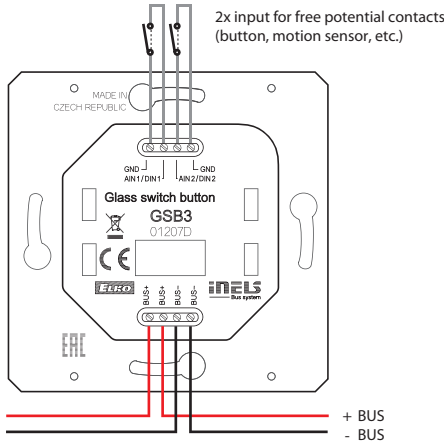




EAN code
WSB3-20: 8595188132343
WSB3-20H: 8595188132473

Technical parameters		WSB3-20	WSB3-20H
Inputs			
Temperature measuring:	YES, built-in temperature sensor		
Scope and accuracy of temp. measuring:	0 to +55°C ; 0.3°C from the range		
Number of control buttons:	2		
Humidity measurement:	NO	YES	
Humidity measurement range:	-	0 to 99% Relative humidity	
Humidity measurement accuracy:	-	± 3 % Relative humidity	
Inputs:	2x AIN/DIN		
External temperature sensor:	YES, the connection between AIN1/DIN1 and AIN2/DIN2		
Type of ext. sensor:	TC/TZ		
Temperature measurement range:	-20 °C to +120 °C		
Temp. measurement accuracy:	0.5 °C from range		
Outputs			
Indication:	two-colored LED (red, green)		
Number of LEDs:	1		
Communication			
Installation BUS:	BUS		
Power supply			
Supply voltage / tolerance:	27 V DC, -20 / +10 %		
Dissipated power:	max. 0.5 W		
Rated current:	25 mA (at 27V DC), from BUS		
Connection			
Terminals:	0.5 - 1 mm²		
Operating conditions			
Operating temperature:	-20 .. +55 °C		
Storing temperature:	-30 .. +70 °C		
Protection degree:	IP20		
Overvoltage category:	II.		
Pollution degree:	2		
Operation position:	any		
Installation:	into installation box		
Dimensions and weight			
Dimensions			
- plastic:	85.6 x 85.6 x 42 mm		
- metal, glass, wood, granite:	94 x 94 x 36 mm		
Weight:	55 g (without frame)		

- Wall controllers with low-upstroke control WSB3-20 and WSB-20H are the main and most frequently used units (controller) in the iNELS system.
- Built-in micro-buttons with low upstroke offer elegant and easy control.
- Wall switches WSB3-20 and WSB3-20H are available in two-channel version.
- Double color (red/green) LED diode indicates either status of controlled appliances or status of any sensor or actuator in the system.
- Wall buttons in WSB3 series are compatible with both types of frames LOGUS⁹⁰ (85.6 x 85.6 or 94 x 94 mm), therefore you can combine them with double and triple frames and classic products of the series.
- Each controller is equipped with a temperature sensor. It is also equipped with two analog/digital inputs (AIN/DIN), which can be used to connect two potentialless contacts or one external temperature sensor TC/TZ (e.g. for measuring floor temperature).
- Wall button WSB3-20H is comparable to the WSB3-20 but additionally equipped with a relative humidity meter, and for better access of air to the sensor can be used with 99621T including accessories 99622 (Vista MT) and 99,623 (Vista IRMT), instead of the housing cover 99601T.
- Compared to standard wall buttons WSB3-20 and WSB3-20H are more flexible and multifunctional. You can for example controll appliances by short and long push of the button (e.g.: dimming, shutter control, scenes).
- Each button can control any appliance in the system and can use a variety of centralized or time controlled features. Accordingly, the customer can choose the simplicity / complexity of the operation. The big advantage is the possibility to change the method of control by only making software modifications without physical interventions into the structure of the building.
- Each button (fold) can have different functional modes beside light-ing control:
 - a) Classic wall-switch:
 - upper button ON, bottom button OFF.
 - b) Button controller (impulse relay):
 - first press ON, second press OFF.
 - c) Dimmer:
 - short press – ON/OFF.
 - d) Time switch:
 - ON after press, automatically OFF after set time.
 - e) Setting light scenes – for example: for watching TV:
 - shutters down
 - main light 30% intensity
 - wall-lamps 50% intensity.
- WSB3 in LOGUS⁹⁰ design is designed for mounting into an installa-tion box.

Connection

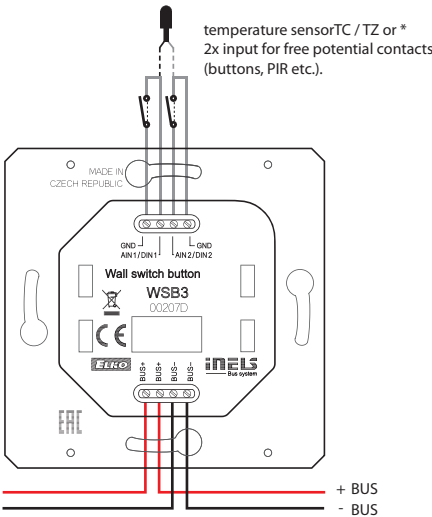

*The choice is made in iDM3 for each unit separately.




EAN code
WSB3-40: 8595188132336
WSB3-40H: 8595188133043

Technical parameters		WSB3-40	WSB3-40H
Inputs			
Temperature measuring:	YES, built-in temperature sensor		
Scope and accuracy of temp. measuring:	0 to +55°C ; 0.3°C from the range		
Number of control buttons:	4		
Humidity measurement:	NO	YES	
Humidity measurement range:	-	0 to 99% Relative humidity	
Humidity measurement accuracy:	-	± 3 % Relative humidity	
Inputs:	2x AIN/DIN		
External temperature sensor:	YES, the connection between AIN1/DIN1 and AIN2/DIN2		
Type of external sensor:	TC/TZ		
Temp. measurement range:	-20 °C to +120 °C		
Temp. measurement accuracy:	0.5 °C from range		
Outputs			
Indication:	two-colored LED (red, green)		
Number of LEDs:	2		
Communication			
Installation BUS:	BUS		
Power supply			
Supply voltage / tolerance:	27 V DC, -20 / +10 %		
Dissipated power:	max. 0.5 W		
Rated current:	25 mA (at 27V DC), from BUS		
Connection			
Terminals:	0.5 - 1 mm²		
Operating conditions			
Operating temperature:	-20 .. +55 °C		
Storing temperature:	-30 .. +70 °C		
Protection degree:	IP20		
Overvoltage category:	II.		
Pollution degree:	2		
Operation position:	any		
Installation:	into installation box		
Dimensions and weight			
Dimensions			
- plastic:	85.6 x 85.6 x 42 mm		
- metal, glass, wood, granite:	94 x 94 x 36 mm		
Weight:	55 g (without frame)		

- Wall mounted controllers with upstroke control WSB3-40 and WSB3-40H are the basic and most popular feature (control) of the iN-ELS system.
- Built-in micro-switch with low upstroke offers elegant and pleasant control.
- Controllers WSB3-40 and WSB3-40H are supplied with four channels.
- Two-coloured indication LEDs located in each controller, can signal the status of controlled appliances or the status of any sensor or ac-tuator in the system.
- Wall buttons in WSB3 series are compatible with both types of frames LOGUS⁹⁰ (85.6 x 85.6 or 94 x 94 mm), therefore you can combine them with double and triple frames and classic products of the series.
- Each controller is equipped with a temperature sensor. It is also equipped with two analog/ digital inputs (AIN/DIN), which can be used to connect two potentialless contacts or one external tempera-ture sensor TC/TZ (e.g. for measuring floor temperature).
- Compared to standard wall buttons WSB3-20 and WSB3-20H are more flexible and multifunctional. You can for example controll appliances by short and long push of the button (e.g.: dimming, shutter control, scenes).
- Each button can control any appliance in the system and can use a variety of centralized or time controlled features. Accordingly, the customer can choose the simplicity / complexity of the operation. The big advantage is the possibility to change the method of control by only making software modifications without physical interventions into the structure of the building.
- Each button (fold) can have different functional modes beside light-ing control:
 - a) Classic wall-switch:
 - upper button ON, bottom button OFF.
 - b) Button controller (impulse relay):
 - first press ON, second press OFF.
 - c) Dimmer:
 - short press – ON/OFF.
 - d) Time switch:
 - ON after press, automatically OFF after set time.
 - e) Setting light scenes – for example: for watching TV:
 - shutters down
 - main light 30% intensity
 - wall-lamps 50% intensity.
- WSB3 in LOGUS⁹⁰ design is designed for mounting into an installa-tion box.

Connection

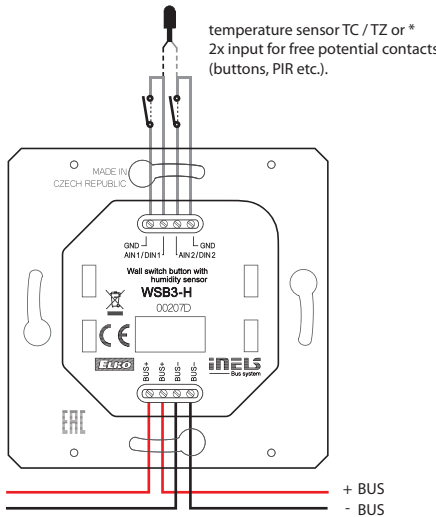

*The choice is made in iDM3 for each unit separately.





EAN code
WMR3-21: 8595188132756

Technical parameters		WMR3-21
Inputs		
Number of control buttons:		2
RFID readers		
Supported frequencies:		13.56 MHz
Card Type:		MIFARE Ultralight, DESFire 2K (EV1), DESFire 4K (EV1)
Outputs		
Output:		1x changeover 8A / AgSnO ₂
Indication:		two-color LED (red, green)
Acoustic output:		piezo-changer
Switching voltage:		230V AC/ 30V DC
Switching output:		2000 VA/AC1; 240 W/DC
Peak current:		20 A/<3s
Insulation voltage between relay outputs and internal circuits:		3.75 kV, SELV according to EN 60950
Minimal switched current:		10 mA / 10 V
Switching frequency without load:		300 min ⁻¹
Switching frequency with rated load:		15 min ⁻¹
Mechanical life:		1x 10 ⁷
Electrical life AC1:		1x 10 ⁵
Communication		
Installation BUS:		BUS
Power supply		
Supply voltage / tolerance:		27 V DC, -20 / +10 %
Dissipated power:		max. 0.5 W
Rated current:		50 mA (at 27V DC), from BUS
Connection		
Data:		terminals, 0.5 - 1 mm ²
Network:		max. 2.5 mm ² /1.5 mm ² with sleeve
Operating conditions		
Operating temperature:		-20 to +55 °C
Storing temperature:		-30 to +70 °C
Protection degree:		IP20
Overvoltage category:		II.
Pollution degree:		2
Operation position:		any
Installation:		into installation box
Dimensions and weight		
Dimensions		
- plastic:		85.6 x 85.6 x 42 mm
- metal, glass, wood, granite:		94 x 94 x 36 mm
Weight:		68 g (without frame)

- WMR3-21 is a wall-mounted card reader that is designed for read contactless media (smart cards, key chains, etc.), which are used for controlling access to buildings or their parts.
- With the glass controller WMR3-21 users will appreciate the easy of control using two push buttons, which can be assigned different control functions lighting, shading, scenes, heating, etc.
- WMR3-21 reader can be used to control the security system (locking / unlocking) access system (opening doors, gates, etc.) or appliances (based on assigned rights).
- WMR3-21 supports RFID media with the carrier frequency of 13.56 MHz. Supported card types MIFARE Ultralight, DESFire 2K (EV1), DESFire 4K (EV1) .
- WMR3-21 is also equipped with 8A relay output with changeover contact AgSnO₂, by which controlled devices can be switched directly (or any actuator in the system can be set in software iDM3).
- Indication two-color LED in the controller cover can indicate not only the status of controlled appliance, but also the status of any sensor or actuator in the system.
- Wall card reader WMR3-21 is compatible with both types of frames LOGUS⁹⁰ (85.6 x 85.6 or 94 x 94 mm), therefore you can combine them with double and triple frames and classic products of the series.

Connection

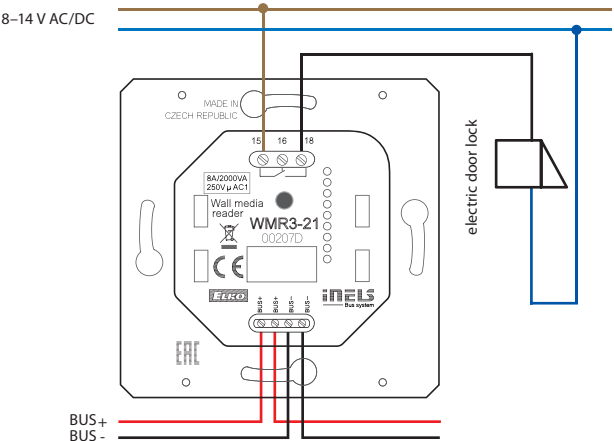


EAN code
GMR3-61/B: 8595188155854
GMR3-61/W: 8595188155793

Technical parameters		GMR3-61
Inputs		
Temperature measuring:		YES, built-in temperature sensor
Scope and accuracy of temp. measuring:		0 to +55°C ; 0.3°C from the range
Number of control buttons:		6
RFID readers		
Supported frequencies:		13.56 MHz
Card Type:		MIFARE Ultralight, DESFire 2K (EV1), DESFire 4K (EV1)
Outputs		
Indication:		3 pairs of LED (red, green)
Output:		1x changeover 8A / AgSnO ₂
Acoustic output:		piezo-changer
Switching voltage:		230V AC/ 30V DC
Switching output:		2000 VA/AC1; 240 W/DC
Peak current:		20 A/<3s
Insulation voltage between relay outputs and internal circuits:		3.75 kV, SELV according to EN 60950
Minimal switched current:		10 mA / 10 V
Switching frequency without load:		300 min ⁻¹
Switching frequency with rated load:		15 min ⁻¹
Mechanical life:		1x 10 ⁷
Electrical life AC1:		1x 10 ⁵
Communication		
Installation BUS:		BUS
Power supply		
Supply voltage / tolerance:		27 V DC, -20 / +10 %
Dissipated power:		max. 2 W
Rated current:		50 mA (at 27V DC), from BUS
Connection		
Data:		terminals, 0.5 - 1 mm ²
Network:		max. 2.5 mm ² /1.5 mm ² with sleeve
Operating conditions		
Relative humidity:		max. 80 %
Operating temperature:		-20 to +55 °C
Storing temperature:		-30 to +70 °C
Protection degree:		IP20
Overvoltage category:		II.
Pollution degree:		2
Operation position:		any
Installation:		into installation box
Dimensions and weight		
Dimensions:		94 x 94 x 36 mm
Weight:		155 g

- Wall RFID card reader GMR3-61 is designed for reading of contactless media (chip cards, key fobs, tags, etc.), which are used for controlling access to buildings or parts of buildings.
- With the glass controller GMR3-61 users will appreciate the elegant design and the easy of control using six touch buttons, which can be assigned different control functions lighting, shading, scenes, heating, etc.
- GMR3-61 a design element of the (control) system iNELS and is available in black (GMR3-61/B) and white (GMR3-61/W) variants.
- GMR3-61 reader can be used to control the security system (locking / unlocking) access system (opening doors, gates, etc.) or appliances (based on assigned rights).
- GMR3-61 supports RFID media with the carrier frequency of 13.56 MHz. Supported card types MIFARE Ultralight, DESFire 2K (EV1), DESFire 4K (EV1) .
- The GMR3-61 is also equipped with 8A relay output with changeover contact AgSnO₂, which can be switched directly by reader (or by any controller in the system).
- Between each pair of touch keys is a pair of indicator LEDs (Green, Red) to indicate the status of the controlled appliance, or the state of any sensor or actuator in the system.
- Located on each touch button is a blue LED indicator, signalling the touch of a button. Touching may also be signalled by a vibrating pulse or audible tone - optionally in the software iDM3.
- All variants of GMR3-61 are available in sizes of luxury controllers LOGUS⁹⁰ (94 x 94 mm).
- GMR3-61 reader is equipped with a sensor of ambient light intensity. Based on information from the sensor can switch the orientation of blue LEDs on the touch-pad GSB3 or perform various actions with the software iDM3, eg. To control the lighting circuits in the corridor and others.
- GMR3-61 cannot be installed into multiple frames they are designed for mounting into installation boxes.

Connection

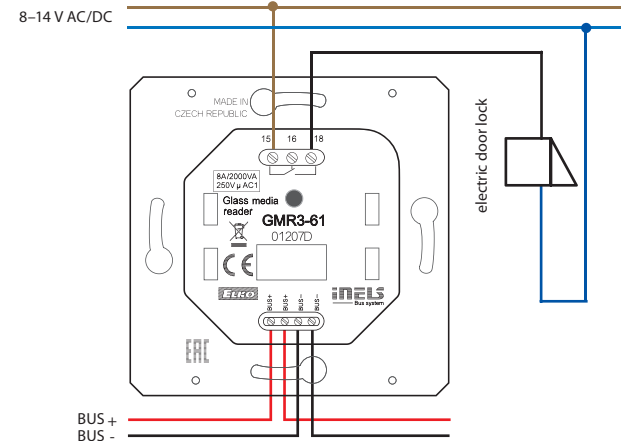




EAN code
IDRT3-1 white: 8595188149488 (device, cover)
IDRT3-1 ivory: 8595188179614 (device, cover)
IDRT3-1 ice: 8595188179591 (device, cover)
IDRT3-1 pearl: 8595188179621 (device, cover)
IDRT3-1 aluminium: 8595188179584 (device, cover)
IDRT3-1 gray: 8595188179607 (device, cover)

Technical parameters		IDRT3-1
Inputs		
Temperature measuring:	YES, built-in thermo sensor	
Range / accuracy of temp. measuring:	0 to +55°C; 0.3°C from range	
Heating/cooling circuit correction:	±3, ±4 or ± 5 °C	
Manual ontrol of heating/cooling circuit:	2 x buttons	
External temperature sensor:	YES, the connection between AIN1/DIN1 and AIN2/DIN2	
Type of external sensor:	TC/TZ	
Temperature measurement range:	-20°C to +120°C	
Temperature measurement accuracy:	0.5°C from range	
Communication		
Installation:	BUS	
Display:	symbol display	
Backlight:	YES	
Power supply		
Supply voltage / tolerance:	27 V DC, -20 / +10 %	
Dissipated power:	max. 0.5 W	
Rated current:	20 mA (at 27V DC), from BUS	
Connection		
Terminals:	0.5 - 1 mm²	
Operating conditions		
Operating temperature:	0 to +50 °C	
Protection degree:	IP20	
Overvoltage category:	II.	
Pollution degree:	2	
Operation position:	vertical, downward with BUS terminal	
Installation:	into installation box	
Dimensions and weight		
Dimensions		
- plastic:	85.6 x 85.6 x 50 mm	
- metal, glass, wood, granite:	94 x 94 x 50 mm	
Weight:	76 g (without frame)	

- IDRT3-1 is a digital wall temperature controller used to regulate the temperature in a room.
- Using the IDRT3-1, it is possible to correct the given heating/cooling circuit within a range of ±3, ±4 or ±5 °C (optional in SW iDM3).
- The temperature controller is equipped with an integrated heat sensor used to measure the room temperature. It is also equipped with two analog digital inputs (AIN/DIN), which can be used to connect two potential free contacts or a single external temperature sensor TC/TZ (e.g. for measuring the floor temperature).
- The display shows the current temperature and after pressing one of two buttons under the display, you can control the desired temperature.
- Readability improves after pressing one of the buttons to activate the backlight.
- Heating/cooling circuit is assigned with a thermo-regulator using iDM3.
- In the case of temperature correction within ±3, ±4 or ± 5 °C, this change is valid until the next time mark within the time schedule established in iDM3.
- IDRT3 -1 in design LOGUS⁹⁰ is intended for mounting into an installation box.

Connection

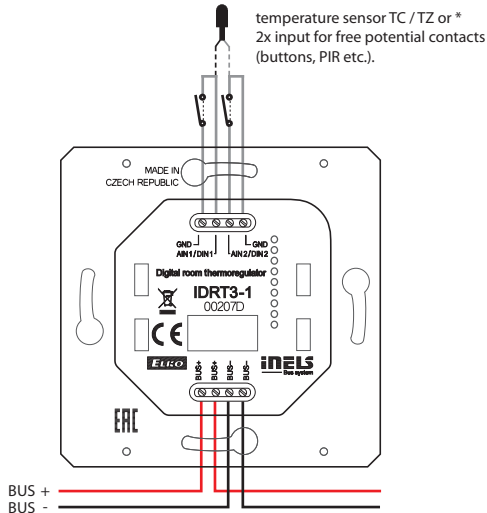

Lighting control

Smart home & building solutions



* The choice is made in iDM3 for each unit separately.




EAN code
EMDC-64M: 8595188150309

Technical parameters		EMDC-64M
Power supply		
Supply voltage / tolerance /	AC 230 V (50 - 60 Hz) /	
Rated current:	-15 / +10 % / max. 100 mA	
DALI power supply:	16 V, 250 mA	
Dissipated power:	max. 3 W	
Communication		
Input interface:	EBM BUS (RS485 communication)	
Output interface:	DALI (max. 64 ballasts) DMX (max. 32 receivers, with repeator to 64)	
Indication		
Power supply:	green LED Un	
Error surge or short DALI:	illuminated red LED ERR	
Indication of unit status:	LED DALI/DMX (see iNELS installation handbook)	
Operating conditions		
Relative humidity:	max. 80 %	
Operating temperature:	-20°C to +55°C	
Storage temperature:	-30°C to +70°C	
Protection degree:	IP20 device, IP40 mounitg in the switchboard	
Control device purpose:	operating control device	
Control device construction:	individual control device	
Characteristic of automatic action:	2.5 kV	
Overvoltage category:	II.	
Pollution degree:	2	
Operating position:	vertical	
Installation:	into switchboard on DIN rail EN60715	
Implementation:	3-MODULE	
Dimension and weight		
Dimension:	90 x 52 x 65 mm	
Weight:	140g	

- The unit EMDC-64M is designed to control DALI electronic ballasts and DMX receivers from the iNELS system.
- EMDC-64M enables control of up to 64 independent electronic ballasts DALI (Digital Addressable Lighting Interface) for fluorescent lamps, LEDs and other light sources.
- EMDC-64M also enables connection of up to 32 receivers DMX (Digital MuxpleX) in a single segment. When used repeaters can control up to 64 devices. Maximum amount of DMX controlled channels is 64 channels.
- Control from iNELS BUS System via EBM BUS.
- DIP switches on the front panel to select the control interface (DALI/DMX).
- Addressing of DALI ballast units can be done via the central unit and iDM3 software or via MINI USB on the front panel of the EMDC-64M and DALI Configurator software.
- The required functionality is set in user project in iDM3 software.
- The unit EMDC-64M is powered from the mains voltage 230 V AC.
- DALI BUS power supply is 16V/250 mA via an EMDC-64M unit.
- The system BUS EBM is galvanically separated from the BUSes DALI/DMX. Terminals for connecting the DALI BUS are equipped with short circuit and surge protection.
- It is possible to connect up to 8 EMDC-64M units to one EBM BUS.
- If this concerns the last unit on a system BUS EBM, it is necessary to terminate the wire with a resistor with nominal resistance of 120 Ω. The resistor is inside the unit, termination is made by shorting neighboring terminals TERM and EBM+.
- The BUS DMX must be terminated at its end by a resistor with nominal resistive value 120 Ω. The resistor for DMX BUS termination is on the side of the EMDC- 64M inside the unit, termination is performed by shorting adjacent terminals TERM and A.
- Updating the firmware of the EMDC-64M can be done through the central unit adn software iDM3 or via MINI USB on the front panel and EMDC-64M Flasher software. Updating through MINI USB must be done while system BUS EBM is disconnected.
- When configuring DALI addresses two types are necessary to distinguish:
 - MASTER - this group includes sensors and detectors and one DALI branch can connect up to 4 DALI MASTER units
 - lighting intensity sensor DLS3-1
 - motion detector DMD3-1
 - SLAVE - electronic lighting ballast
- EMDC-64M in 3-MODULE design is designed for mounting in a control panel on a DIN rail EN60715.

Connection

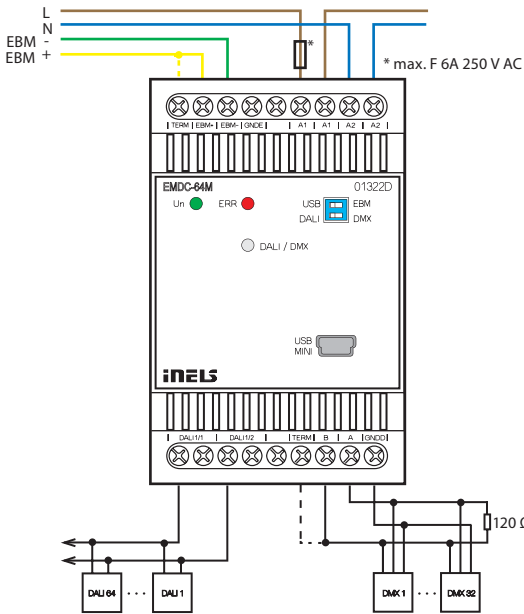

EAN code
DMD3-1: 8595188157513

Technical parameters		DMD3-1
Inputs		
Angle of motion detection:	140 °, 4 m	
Recommended installation height:	2.5 - 3 m	
Changing the PIR sensitivity:	Yes, 0.. 127 (max. sensitivity)	
PIR scan type:	single / dual	
Default setup PIR:	99 dual	
Temperature measuring:	YES, built-in temperature sensor /	
Scope and accuracy of temp. measurement:	-25.. +110 °C; ± 0.3 °C	
Humidity measurement:	YES	
Humidity meas. range:	0 .. 99% RH	
Humidity meas. accuracy:	± 4 % RH	
Light Metering:	YES	
Detection angle:	± 55 °	
Measuring range:	1 - 100 000 lx	
Number of control buttons:	1	
Outputs		
Indication red LED:	identification DALI MASTER / communication options	
Indicating blue LED:	PIR Activation	
Indication green LED RUN:	communications / unit status	
Communication		
Interface:	Installation BUS iNELS DALI	
Power supply		
From iNELS BUS:	27 V DC, -20 / +10 %	
Rated current:	18 mA	
From DALI BUS:	16 V (max. 23 V)	
Rated current:	27 mA	
Dissipated power:	max. 0.5 W	
Connection		
Terminals:	0.3 - 0.8 mm²	
Operating conditions		
Operating temperature:	-20 .. +55 °C	
Storing temperature:	-30 .. +70 °C	
Protection degree:	IP20	
Operation position:	vertical	
Installation:	ceiling	
Dimension and weight		
Dimension:	Ø 76 x 73 mm	
- installation hole diameter:	60 mm	
- diameter visible:	76 mm	
Weight:	81 g	

For proper function of the detector it is necessary to eliminate all interference from heat or light sources in the sensing area.


The detector cannot be installed on an unstable or vibrating surface.

Lower mounting height will reduce the overall size of the detection zone.


The distance from the unit and the colour of the illuminated area affects the resulting value of the measured illumination by the DMD3-1 unit.

- DMD3-1 is a combined detector for ceiling mounting.
- Possibilities to use the DMD3-1:
 - Motion detector
 - Sensor luminescence
 - Temperature measuring
 - Humidity measurement
- The unit is equipped with two communication interfaces:
 - Installation iNELS BUS
 - DALI
- The motion detector is used to detect people moving in the area. Using the passive scanning infrared spectrum for detection.
- Integrated luminescence sensor can be used for sensing current luminescence at the point of installation of the unit. This information can be used in tasks to maintain a constant luminescence. In space where it is possible, thanks to the contribution of natural light from the outside to adjust the artificial light, which can reduce energy consumption.
- Setting the communication interface is done using the SET button.
- The unit can be configured via the iNELS3 Designer & Manager software, which, among other things it is possible to:
 - Set the desired function depending on detected motion.
 - Resolve jobs based on the value of luminescence.
 - Enable / disable the alarm LED on the detector housing.
- DMD3-1 detector is designed for indoor installation and is not intended for outdoor use.
- DMD3-1 detector is powered directly via the iNELS BUS installation (nominal 27 V DC) or DALI BUS (nominal 16 V DC).

Connection

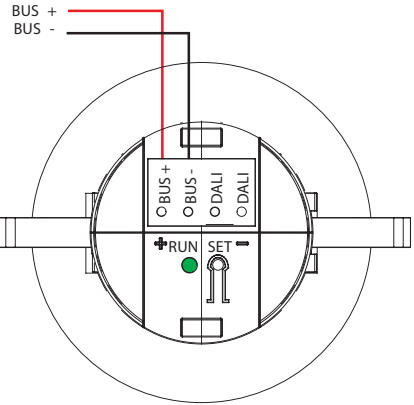

Scanning range

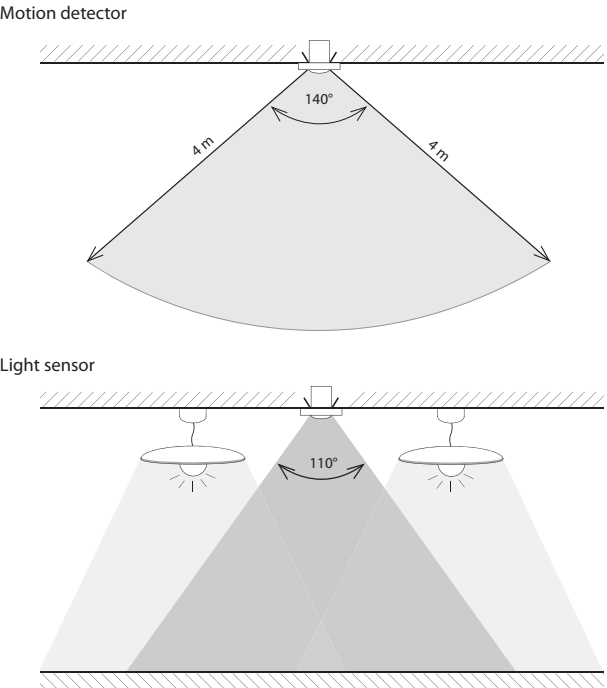




EAN code
DLS3-1: 8595188157506

Technical parameters		DLS3-1
Inputs		
Range of measurement of lighting:		1 - 100 000 lx
Detection angle:		40 °
Outputs		
Indication red LED:		identification DALI MASTER / setting indication
Indication green LED RUN:		communications / unit status
Communication		
Interface:		Installation BUS iNELS DALI
Power supply		
From iNELS BUS:		27 V DC, -20 / +10 %
Rated current:		12 mA (27V DC)
From DALI BUS:		16 V (max. 23 V)
Rated current:		20 mA (16 V DC)
Dissipated power:		max. 0.5 W
Connection		
Terminals:		max. 1x2.5, max. 2x1.5 / with sleeve max. 1x2.5 mm²
Operating conditions		
Operating temperature:		-30 .. +60 °C
Storing temperature:		-30 .. +70 °C
Protection degree:		IP 65
Operating position:		vertical
Dimension and weight		
Dimension:		96 x 62 x 34 mm
Weight:		100 g

For proper function of the detector it is necessary to eliminate all sources of light interference in the sensing area.

- The luminescence sensor DLS3-1 is for sensing the current luminescence at the point of installation of the unit.
- The DLS3-1 sensor is equipped with two communication interfaces:
 - iNELS BUS Installation.
 - DALI.
- Information about the current value of the light intensity can be used in tasks of maintaining constant luminescence. In space where it is possible, thanks to the contribution of natural light from the outside to adjust the artificial light, which can reduce energy consumption.
- Thanks to the DLS3-1 units cannot only be used in residential projects, but also in commercial projects, offices or manufacturing plants, warehouses.
- The DLS3-1 unit is recommended to be installed so that the luminescence sensor for sensing faces down and should not be exposed to direct radiation.
- Setting up a communication interface with DIP switches no. 1:
 - In the upper position determines the communication interface DALI
 - In the lower position determines the communication interface iNELS
- The DLS3-1 detector is powered directly via the iNELS BUS installation (nominal 27 V DC) or DALI BUS (nominal 16 V DC).
- The unit can be configured via iNELS3 Designer & Manager software, which, amongst other things it is possible to:
- Set the desired functions according to the detected illumination.
- The sensing range is 1-100 000 lux.
- The DLS3-1 unit is supplied in IP65 and so can be installed in the outdoor environment.

Connection

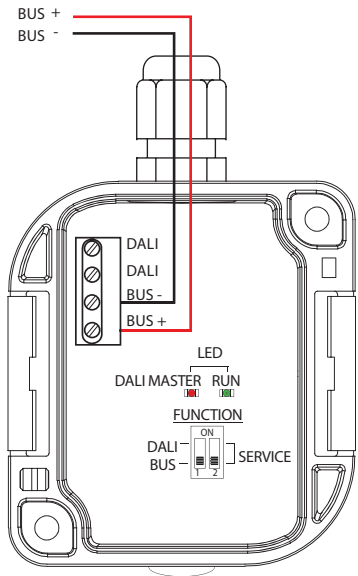

Hospitality Solution

Guest Room Management System





EAN code
CU3-04M: 8595188133067

Technical parameters CU3-04M	
LED Indication	
Green LED RUN:	unit operating status indication
Red LED ERR:	unit error indication
TFT display	
displays the current status and settings	
Type:	color TFT
Resolution:	240x240 / 1:1 aspect ratio
Visible area:	26x26 mm
Controlling:	using arrows
The internal real-time clock:	accuracy: 1s/day at 23 °C
Inputs	
Inputs:	8x DIN GS 12-230V AC/DC (contra to the common terminal COM)
	4x DIN current or voltage (with adjustable switching of the current mode)
	7x AIN / DIN current or voltage (with adjustable switching of the current mode)
Outputs	
Output:	4x AOUT 0(1)-10V max. 10mA / channel
	1x ReFOUT 5(10)V max. 100mA
Number of Units connected directly to CU3-04M:	
max. 32	
Possibility of expansion via external master:	up to 544 units, 8x Ethernet master
Output relays separated from all internal circuits:	reinforced Insulation *
Insulation between COM potentials:	reinforced Insulation *
Isolates. voltage open relay contact:	1 kV
SSR (Electronic Relay):	4x NO (OUT3 - OUT6)
Switched voltage:	20 - 240 V AC
Switched output:	480 VA
Peak current:	20 A, t ≤ 16 ms
Relay 6A:	12x NO (RE1 - RE6, RE11 - RE16), 1x HW block changeover (OUT1 - OUT2)
Switched voltage:	250 V AC1, 30 V DC
Switched output:	1500 VA/AC1, 180 W/DC
Minimum switching load:	500 mW (12 V / 10 mA)
Mechanical life:	10x10 ⁶
Electrical life AC1:	6x10 ⁴
Relay 10A:	4x NO (RE7 - RE10)
Switched voltage:	250 V AC1, 24 V DC
Switched output:	2500 VA/AC1, 240 W/DC
Peak current:	30 A max. 4 s. at 10% duty cycle
Minimum switching current:	100 mA
Switching frequency without load:	1200 min ⁻¹
Switching frequency with rated load:	6 min ⁻¹
Mechanical life:	3x 10 ⁷
Electrical life AC1:	0.7x 10 ⁵

Communication	
BUS	
Maximum number of units:	max. 32 units
Maximum cable length:	max. 500 m (depends on power loss)
3x Ethernet	
Connectors:	RJ45 on the underside of the component
Communication speed:	100Mbps
Indication of the Ethernet:	3x green - Ethernet communication 3x yellow - Ethernet speed 100 Mbps
The default IP address (ETH3):	192.168.1.1 (the IP address can be changed in the menu using the display and buttons)
DALI master:	max. 64 master units, max. 64 slaves ***
Internal power supply:	BUS power supply
Max. Internal power supply voltage:	max. 64 mA (option to connect an external power supply)
Power supply	
Supply voltage / tolerance:	27 V DC, -20 / +10 %
Rated current:	110 mA (at 27 V DC)
Operating conditions	
Working temperature:	-20 to +55 °C
Storage temperature:	-25 to +70 °C
Humidity:	max. 80%
Degree of protection:	IP20 devices, IP40 with cover in the switchboard
Overvoltage category:	II.
Degree of pollution:	2
Operating position:	any
Installation:	to the switching board on the EN60715 DIN rail
Design:	2x 6-MODULE
Terminal:	max. 2.5 mm ²
Dimensions and weight	
Dimensions:	90 x 210 x 65 mm (2x (90 x 105 x 65 mm))
Weights:	457 g


iNELS RF Control interface for CU3-04M	
Communication protocol:	RF Touch Compatible
Transmitting frequency:	866 MHz / 868 MHz / 916 MHz
Signal transmission methods:	bidirectionally addressed message
Output for RF antenna:	SMA connector**
RF antenna:	1 dB (part of package)
Free space range:	up to 100 m

DIN = digital input
AOUT = analogue output
AIN = analogue input
GS = galvanically isolated

* (Cat. II surges by EN 60664-1)
** Max Tightening Torque for antenna connector is 0.56 Nm.
*** With an external DALI power supply

- CU3-04M control unit is designed to control hotel rooms.
- CU3-04M control unit is designed to enable management of all technology that may be in guest rooms, it is designed to provide maximum comfort while running with maximum efficiency throughout the building.
- CU3-04M is equipped with:
 - Digital input for connecting push-button controls, motion detectors or, for example magnetic detectors.
 - Analog inputs for connecting temperature sensors.
 - Digital outputs for the control of actuators, ventilator fan coil units, door locks, lighting, shading techniques, sockets and other equipment.
 - Analog output 0(1) -10V for controlling actuators and controlled continuously dimmable ballasts, controlled using voltage signals.
 - Installation BUS for connecting up to 32 BUS controllers and thermostats.
 - One DALI BUS for up to 64 electronic ballasts illumination (internal source CU3-04M is able to power the connected ballasts up to a nominal value of 64 mA).
 - RF communication interface for controlling iNELS RF Control wireless receivers (updated list of supported receiver is available in the iNELS installation manual).
- To create a logic of local control configuration software iNELS3 Designer & Manager (iDM3).

- CU3-04M control units can be connected in a complex control system (BMS) 4 Niagara, Niagara AX and Promotic.
- CU3-04M control unit is also able to communicate with a hotel system (PMS) Fidelio, so it is possible, for example, automatically during check-in to run in the room a welcoming scene, immediately signalling requirements for room cleaning etc.
- Thanks to its connection to BMS, it is possible amongst other things to:
 - Monitor the status of all system components from one location.
 - Interconnect iNELS with other protocols.
 - Create logical functions between the managing units.
 - Optimize the performance of HVAC systems based on current requirements from individual rooms.
- CU3-04M is also equipped with three Ethernet ports, one of which is used for connecting to Ethernet (100 Mbps) and two for CU3-04M wiring control units.
- CU3-04M has an TFT display that displays the current status and allows the setting of unit parameters such as network settings, date, time or the enabled service.
- Navigating the menus CU3-04M is possible using the directional buttons on the front panel.
- The execution of 2x 6-MODULE in the CU3-04M is designed for installation into switchboard on DIN rail EN60715.

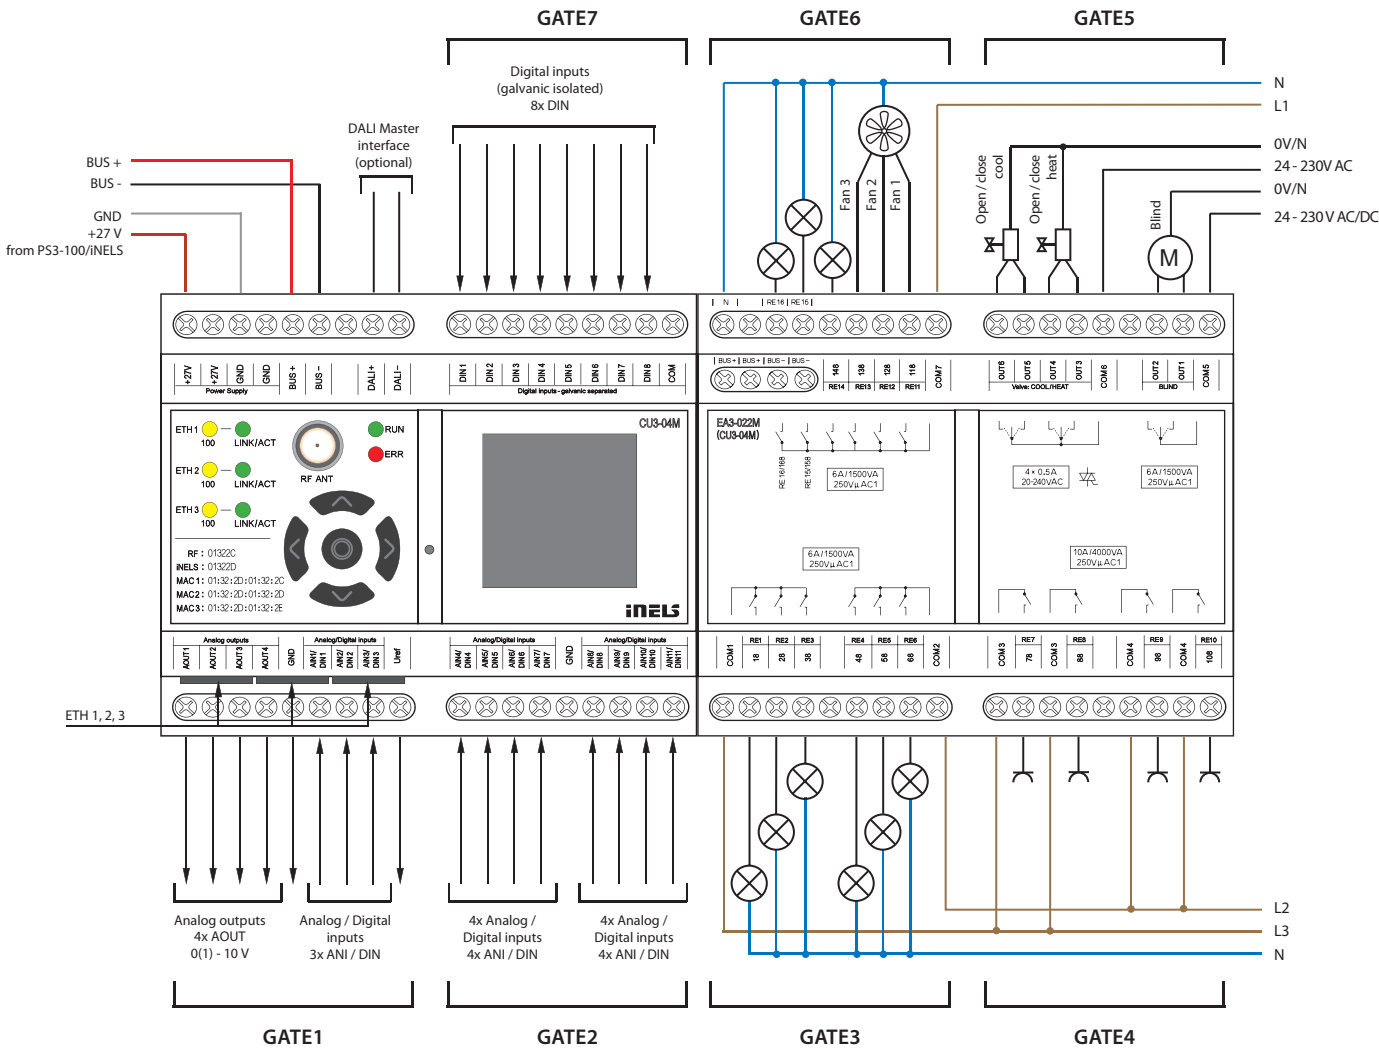

NEW



EAN code
GSB3-220/SB: 8595188176408
GSB3-240/SB: 8595188176323
GSB3-260/SB: 8595188176361

The picture of device is illustrative, the icons (symbols) are configurable by the customer.

Technical parameters				GSB3-220/S	GSB3-240/S	GSB3-260/S
Inputs						
Temperature measuring:	YES, built-in temperature sensor					
Scope and accuracy of temp. measurement:	0.. +55°C; 0.3°C from the range					
Inputs:	2x AIN/DIN					
Resolution:	by setting 10-bit					
External temperature sensor:	YES, the connection between AIN1/DIN1 and AIN2/DIN2					
Type of external sensor:	TC/TZ					
Temperature measurement range:	-20°C to +120°C					
Temperature measurement accuracy:	0.5°C from the range					
Illuminance sensor:	1 ... 100 000 Lx					
Buttons						
Number of control buttons:	2	4	6			
Type:	Capacitive					
Indication:	Coloured illuminated symbol					
Outputs						
Acoustic output:	piezo-changer					
Tactile output:	Vibration motor					
Communication						
Installation BUS:	BUS					
Power supply						
Supply voltage / tolerance:	27 V DC, -20 / +10 %					
Dissipated power:	max. 0.5 W					
Rated current:	25-35 mA	25-43 mA	25-50 mA	(at 27V DC), from BUS		
Connection						
Terminals:	0.5 - 1 mm²					
Operating conditions						
Relative humidity:	max. 80 %					
Operating temperature:	-20 .. +55 °C					
Storing temperature:	-30 .. +70 °C					
Protection degree:	IP20					
Overvoltage category:	II.					
Pollution degree:	2					
Operation position:	any					
Installation:	on the wall, observing the conditions for correct installation of the thermostat					
Dimensions and weight						
Dimensions:	100 x 100 x 36 mm					
Weight:	154 g					

- Glass touch controllers with symbols GSB3-20/S, GSB3-40/S and GSB3-60/S are part of a comprehensive range of glass iNELS control units and can be advantageously used in all projects for example as a part of guest room management system (GRMS).
- GSB3-20/S is equipped with two, GSB3-40/S with four and GSB3-60/S six touch buttons whose functions can easily modify by the software.
- Printing is possible to customize to the investor requirements.
- Individual symbols can be illuminated in one of seven colours - red, green, blue, yellow, pink, turquoise and white.
- Glass touch panel is a design component of the iNELS system and is available in elegant black (GSB3-20/SB, GSB3-40/SB, GSB3-60/SB) and white (GSB3-20/SW, GSB3-40/SW, GSB3-60/SW) versions.
- All versions are in the size of the module (94x94 mm) from the line of luxury switches and sockets LOGUS⁹⁰ and are therefore fully in line with the design of frames for the sockets of this series, where you can just as for the controllers choose white and black glass frames.
- The glass touch controllers is equipped with an integrated temperature sensor. It is also equipped with two analog-to-digital inputs (AIN/ DIN), which can be used to connect two potential-free contacts or one external temperature sensor TC/TZ (for example temperature measurement of the floor).
- The glass touch controllers are also equipped with a sensor of ambient light intensity. Based on information from the sensor it can switch backlight of symbols or perform various actions in the iDM3 software, for example also switch the lighting circuits in the room.
- Advantages over conventional switches / buttons are saving space, signalling the state of any system output, the ability to measure temperature as well as the ability to connect external buttons or detectors.
- Each button can control any actuator (appliance) in the system. Also, you can assign each button a different function or macro (set of functions). It is therefore possible to use one button to control several appliances at once.
- GSB3-20/S, GSB3-40/S, and GSB3-60/S are designed for mounting into an installation box.


NEW




EAN code
GSB3-220/SW: 8595188176415
GSB3-240/SW: 8595188176330
GSB3-260/SW: 8595188176378

The picture of device is illustrative, the icons (symbols) are configurable by the customer.

Connection

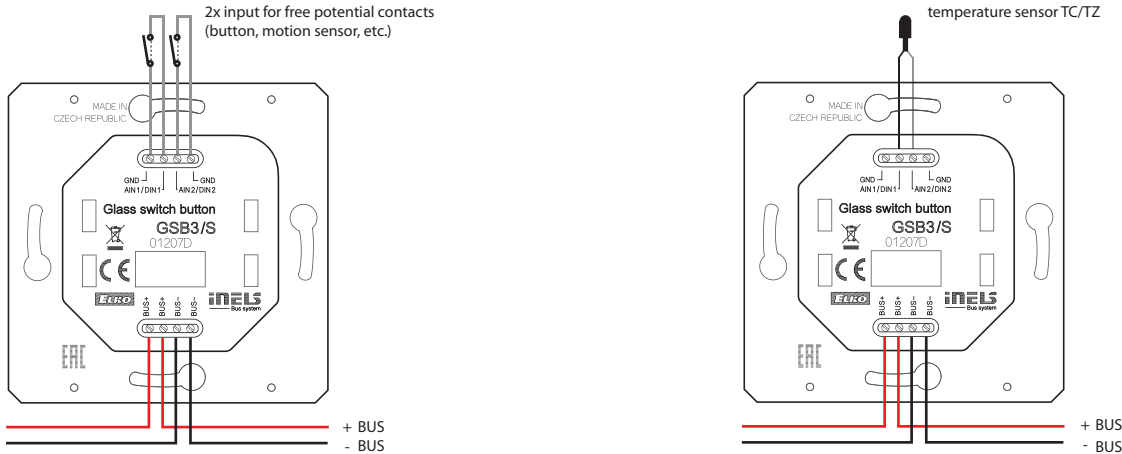


NEW

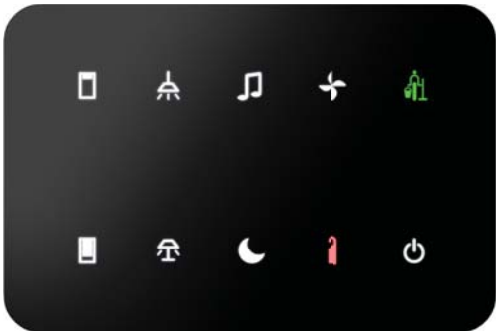

EAN code*
GSP3-2100/B: 8595188176583
GSP3-2100/W: 8595188176590


Technical parameters		GSP3-2100
Inputs		
Temperature measuring:	YES, built-in temperature sensor	
Scope and accuracy of temp. measurement:	0.. +55°C; 0.3°C from the range	
Inputs:	2x AIN/DIN	
Resolution:	by setting 10-bit	
External temperature sensor:	YES, the connection between AIN1/DIN1 and AIN2/DIN2	
Type of external sensor:	TC/TZ	
Temperature measurement range:	-20°C to +120°C	
Temperature measurement accuracy:	0.5°C from the range	
Buttons		
Number of control buttons:	10	
Type:	Capacitive	
Indication:	Coloured illuminated symbol	
Outputs		
Acoustic output:	piezo-changer	
Tactile output:	Vibration motor	
Communication		
Installation BUS:	BUS	
Power supply		
Supply voltage / tolerance:	27 V DC, -20 / +10 %	
Dissipated power:	max. 0.5 W	
Rated current:	25-65 mA (at 27V DC), from BUS	
Connection		
Terminals:	0.5 - 1 mm²	
Operating conditions		
Relative humidity:	max. 80 %	
Operating temperature:	-20 .. +55 °C	
Storing temperature:	-30 .. +70 °C	
Protection degree:	IP20	
Overvoltage category:	II.	
Pollution degree:	2	
Operation position:	any	
Installation:	on the wall, observing the conditions for correct installation of the thermostat	
Dimensions and weight		
Dimensions:	150 x 100 x 36 mm	
Weight:	208 g	

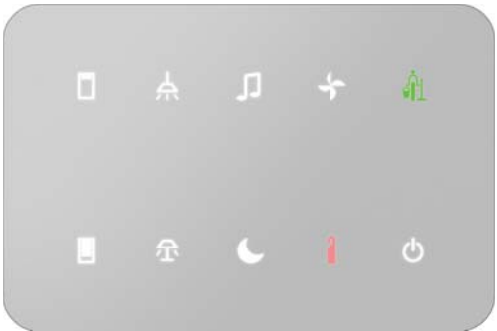


The picture of device is illustrative, the icons (symbols) are configurable by the customer.

- Glass Touch Panel GSP3-100 is part of a comprehensive iNELS series of units for the management of the hotel rooms (GRMS), but the unit can be used wherever it is required to control multiple devices from one location.
- GSP3-100 is equipped with ten touch buttons whose functions can easily be edited using the software.
- The graphics of individual symbols are possible based on consultations with manufacturers to change and adapt to the requirements of the investor.
- Individual symbols can be any one of seven backlight colours - red, green, blue, yellow, pink, turquoise and white.
- Glass touch panel is a design component of the iNELS system and is available in elegant black (GSP3-100/B) and white (GSP3-100/W) versions.
- Compared with standard glass touchscreen controllers with symbols GSB3-20/SB, GSB3-20/SW, GSB3-40/SB, GSB3-40/SW, GSB3-60/SB and GSB3-60/SW the GSP3-100 is one and a half times the width.
- The touch panel is equipped with an integrated temperature sensor. It is also equipped with two analogue-to-digital inputs (AIN/DIN), which can be used to connect two potential free contacts or one external temperature sensor TC / TZ (e.g. For measuring the temperature of the floor).
- The touch panel is also equipped with an ambient light intensity sensor. Based on information from the sensor it can light up indicative illumination symbols or perform various actions with the iDM3 software, e.g. To also switch the lighting circuits in the room.
- Advantages over conventional switches / buttons is saving space, signalling the state of any system output, the ability to measure temperature and an option to connect external pushbuttons or detectors.
- Each button can control any actuator (appliance) in the system. Also, you can assign a different function or macro (set of functions) to each button. It is therefore possible to use one button to control several appliances.
- GSP3-100 is designed for mounting into an installation box.

Connection

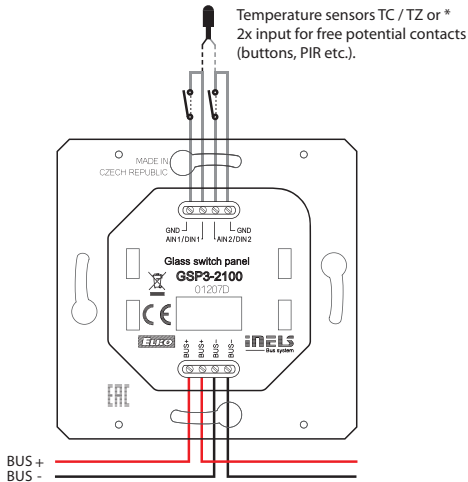

NEW

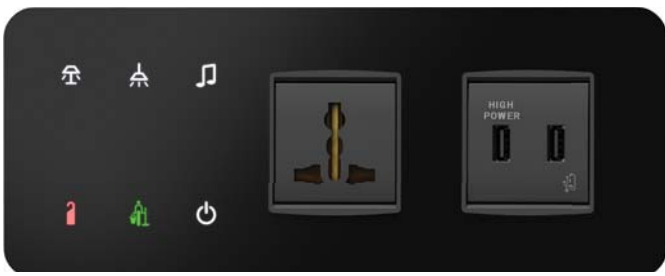


GBP3-260/BR/2F

EAN code*

Technical parameters		GBP3-260
Inputs		
Inputs:	2x AIN/DIN	
Resolution:	by setting 10-bit	
External temperature sensor:	YES, the connection between AIN1/DIN1 and AIN2/DIN2	
Type of external sensor:	TC/TZ	
Temperature measurement range:	-20°C to +120°C	
Temperature measurement accuracy:	0.5°C from the range	
Illuminance sensor:	1 ... 100 000 Lx	
Buttons		
Number of control buttons:	6	
Type:	Capacitive	
Indication:	Coloured illuminated symbol	
Outputs		
Acoustic output:	piezo-changer	
Tactile output:	Vibration motor	
Communication		
Installation BUS:	BUS	
Power supply		
Supply voltage / tolerance:	27 V DC, -20 / +10 %	
Dissipated power:	max. 0.5 W	
Rated current:	25-50 mA (at 27V DC), from BUS	
Connection		
Terminals:	0.5 - 1 mm²	
Operating conditions		
Relative humidity:	max. 80 %	
Operating temperature:	-20 .. +55 °C	
Storing temperature:	-30 .. +70 °C	
Protection degree:	IP20	
Overvoltage category:	II.	
Pollution degree:	2	
Operation position:	any	
Installation:	on the wall, observing the conditions for correct installation of the thermostat	
Dimensions and weight		
Dimensions:	GBP3-60/1F: 174 x 100 x 36 mm, GBP3-60/2F: 245 x 100 x 36 mm	
Weight:	according to the selected module	

* Order codes are available in the iNELS price list.

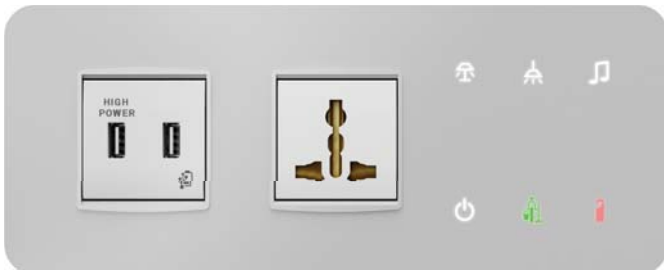


GBP3-260/WL/2F

The picture of device is illustrative, the icons (symbols) and wiring accessories are configurable by the customer.

- Glass bedside panel GBP3-60 is part of a comprehensive range of iNELS control units for guest room management system (GRMS). Bedside panel is composed from three modules, of which one is module of touch buttons and two are modules to power for example mobile devices.
- The GBP3-60 is available in several designs, making it a very flexible and effective solution for a variety of projects. The following variants are available:
 - Left / Right version provides the same ease of operation from both sides of the bed.
 - 2-module (1F) / 3-module (2F) design enables you to add a touch module with one or two power supply modules, network connection or multimedia.
 - Black / White elegant design suitable for almost any interior.
- GBP3-60 panel is equipped with six customizable touch buttons whose function can be software adapted to the requirements of the investor. Of course there is the possibility of using the "Master OFF", then you can select functions for switching and dimming of lighting, shading control, different scenarios etc.
- Printing is possible to customize to the investor requirements.
- GBP3-60 can be equipped with a number of modules, for example.
 - Power AC sockets: French, British, Multi, and Shockproof
 - Other types of modules: USB, LAN, Media
- The GBP3-60 panel is equipped with an ambient light sensor.
- Individual symbols can be illuminated in one of three colours - red, green and blue.
- GBP3-60/1F is designed for mounting into a double mounting box, GBP3-60/2F to a triple mounting box (distance between the centres of each of openings is 71 mm).

Connection



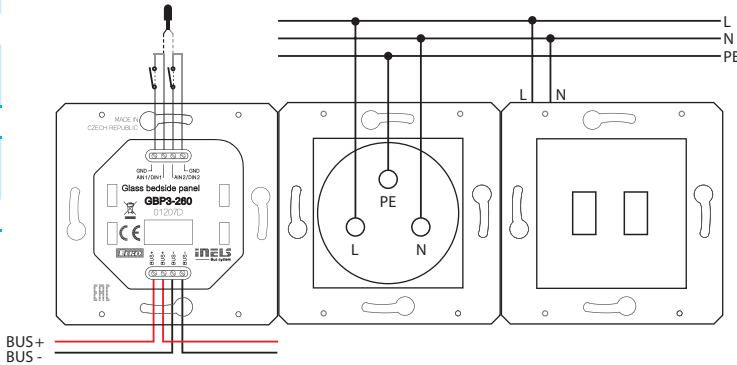


GBP3-260/xR/2F-23x-20x









* The choice is made in iDM3 for each unit separately.

Switch

Push button









				
One switch / 1M	One switch / 2M	Three switches	One Push button / 1M	One Push button / 2M
11B (20001)	12B (20001.2)	14B (20003)	49B (20008)	50B (20008.7)
11W (20001.B)	12W (20001.2.B)	14W (20003.B)	49W (20008.B)	50W (20008.7.B)

Socket

					
USA outlet	Schuko outlet	French outlet	3 PIN outlet	British outlet	Multistandard outlet
21B (20242)	22B (20208)	23B (20212)	24B (20214)	25B (20219)	26B (20257)
21W (20242.B)	22W (20208.B)	23W (20212.B)	24W (20214.B)	25W (20219.B)	26W (20257.B)

Data & Audio/Video

		
USB power supply unit	TV-FM-SAT socket outlet	VGA connector
20B (20295)	31B (20303)	32B (20348)
20W (20295.B)	31W (20303.B)	32W (20348.B)


							
TV outlet	Phone outlet	A/V connectors	UTP outlet	USB supply unit	Switch (CBs)	HDMI connector	USB outlet
41B (20313)	42B (20320)	43B (20335)	44B (20337.6)	48B (20292)	46B (20405.06)	47B (20346.H)	45B (20345)
41W (20313.B)	42W (20320.B)	43W (20335.B)	44W (20337.6.B)	48W (20292.B)	46W (20405.06.B)	47W (20346.H.B)	45W (20345.B)

(Number in brackets is original Vimar product code)

Glass Bedside Panel

Configure bedside panel according to your request.

L (left option)

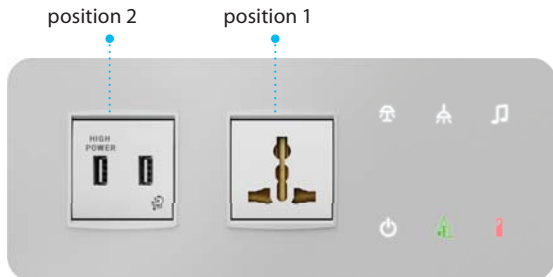


position 2

position 1

GBP3-260/WL/2F-26W-20W


R (right option)

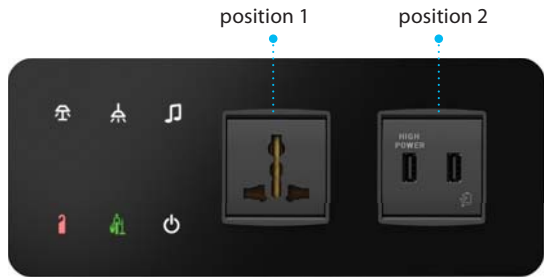

position 1


position 2

GBP3-260/BR/2F-26B-11B44B

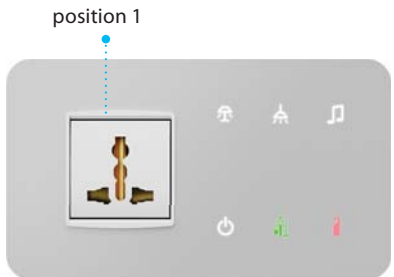

position 1

GBP3-260/WL/1F-20W

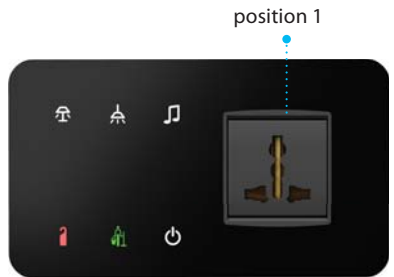

position 1

GBP3-260/BR/1F-26B

Part number

Glass

button

panel

iNELS3

new design

6 buttons

GBP3-260

/xx/xF

-x-x

color

B / W

(black / white)

type

L / R

(left / right)

number of frame

1 / 2

position 1

our product code(s)*

position 2

our product code(s)*

* In case of 1-module choice it is necessary to pick 2x 1-module to fill up the 1 position, for example GBP3-260/WL/1F-21W45W.

Classic plate

			
Glass white ice / 2M	Glass black ice / 2M	Glass black ice / 3M	Glass black ice / 4M

If you have any question contact our sales representative.
For more information: www.vimar.com/en/int/catalog/product

NEW




EAN code	The picture of device is illustrative, the icons (symbols) are configurable by the customer.
GRT3-250/B:	8595188176569
GRT3-250/W:	8595188176576

Technical parameters		GRT3-250	
Inputs			
Temperature measuring:	YES, built-in temperature sensor		
Scope and accuracy of temp. measurement:	0.. +55°C; 0.3°C from the range		
Humidity measurement:	YES		
Humidity measurement range:	0 to 99% RH		
Humidity measurement accuracy:	± 3 % Relative humidity		
Inputs:	2x AIN/DIN		
Resolution:	by setting 10-bit		
External temperature sensor:	YES, the connection between AIN1/DIN1 and AIN2/DIN2		
Type of external sensor:	TC/TZ		
Temperature measurement range:	-20°C to +120°C		
Temperature measurement accuracy:	0.5°C from the range		
Buttons			
Number of control buttons:	5		
Type:	Capacitive		
Indication:	Coloured illuminated symbol		
Display			
Display:	colored TFT, 20 x 25.5 mm		
Resolution:	240 x 240 pixels		
Outputs			
Acoustic output:	piezo-changer		
Tactile output:	Vibration motor		
Communication			
Installation BUS:	BUS		
Power supply			
Supply voltage / tolerance:	27 V DC, -20 / +10 %		
Dissipated power:	max. 0.5 W		
Rated current:	85 mA (at 27V DC), from BUS		
Connection			
Terminals:	0.5 - 1 mm²		
Operating conditions			
Relative humidity:	max. 80 %		
Operating temperature:	-20 .. +55 °C		
Storing temperature:	-30 .. +70 °C		
Protection degree:	IP20		
Overvoltage category:	II.		
Pollution degree:	2		
Operation position:	any		
Installation:	on the wall, observing the conditions for correct installation of the thermostat		
Dimensions and weight			
Dimensions:	100 x 100 x 36 mm		
Weight:	156 g		


- Glass room thermo-regulator GRT3-50 is part of a comprehensive range of glass INELS control units for guest room management system (GRMS) and serves to regulate the temperature in the room.
- GRT3-50 thermo-regulator has a display for displaying the current room temperature and desired temperature. To adjust the required temperature, it is possible to use the touch buttons with symbols "-" and "+".
- GRT3-50 is also suitable for controlling fan coils and fan speed can be easily adjusted by using the touch buttons with symbols.
- Thermo-regulator GRT3-50 also has a further two touch buttons whose function can be adjusted by software, for example fan coil on/off, heating/cooling or comfort temperature for heating or cooling.
- Thermo-regulator is equipped with an integrated temperature sensor for ambient temperature measurement.
- The glass room thermo-regulator is a design component of the INELS system and is available in elegant black (GRT3-50/B) and white (GRT3-50/W) version.
- Printing is possible to customize to the investor requirements.
- Individual symbols can be illuminated in one of seven colours - red, green, blue, yellow, pink, turquoise and white.
- GRT3-50 are designed for mounting into an installation box.

Connection

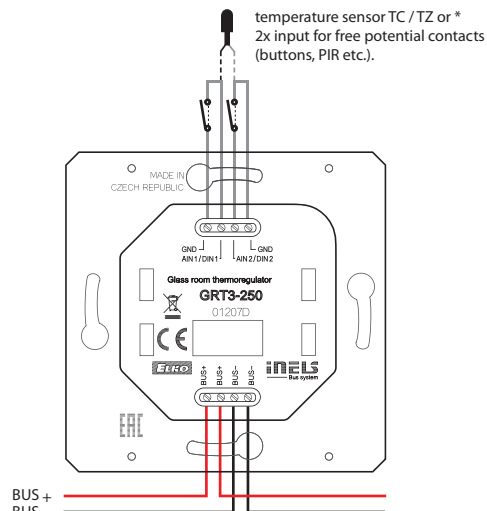

* The choice is made in iDM3 for each unit separately.

NEW

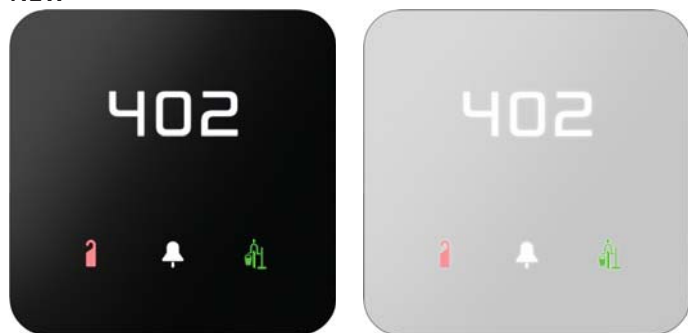


EAN code	The picture of device is illustrative, the icons (symbols) are configurable by the customer.		
GCR3-211/B:	8595188176422		
GCR3-211/W:	8595188176439		

Technical parameters		GCR3-211	
Input			
Illuminance sensor:	1 ... 100 000 Lx		
Buttons			
Number of control buttons:	3		
Type:	Capacitive		
Indication:	Coloured illuminated symbol		
RFID readers			
Supported frequencies:	13.56 MHz		
Card Type:	MIFARE Ultralight, DESFire 2K (EV1), DESFire 4K (EV1)		
Outputs			
Signalling:	Do Not Disturb, Make Up Room		
Output:	1x changeover 8 A / AgSnO ₂		
Acoustic output:	piezo-changer		
Tactile output:	Vibration motor		
Switching voltage:	230V AC/ 30V DC		
Switching output:	2000 VA/AC1; 240 W/DC		
Peak current:	20 A/<3s		
Insulation voltage between relay outputs and internal circuits:	3.75 kV, SELV according to EN 60950		
Minimal switched current:	10 mA / 10 V		
Switching frequency without load:	300 min ⁻¹		
Switching frequency with rated load:	10 min ⁻¹		
Mechanical life:	1x 10 ⁷		
Electrical life AC1:	1x 10 ⁵		
Communication			
Installation BUS:	BUS		
Power supply			
Supply voltage / tolerance:	27 V DC, -20 / +10 %		
Dissipated power:	max. 0.5 W		
Rated current:	100-130 mA (at 27V DC), from BUS		
Connection			
Data:	terminals, 0.5 - 1 mm ²		
Network:	max. 2.5 mm ² /1.5 mm ² with sleeve		
Operating conditions			
Relative humidity:	max. 80 %		
Operating temperature:	-20 .. +55 °C		
Storing temperature:	-30 .. +70 °C		
Protection degree:	IP20		
Overvoltage category:	II.		
Pollution degree:	2		
Operation position:	any		
Installation:	into installation box		
Dimensions and weight			
Dimensions:	100 x 100 x 36 mm		
Weight:	161 g		

- Glass RFID card reader GCR3-11 is part of a comprehensive range of glass iNELS control units and can be advantageously used in all projects, e.g. guest room management system (GRMS).
- GCR3-11 card reader is designed for reading smart cards, which are intended to enter the hotel room or any other part of the building.
- GCR3-11 supports RFID media with a carrier frequency of 13.56 MHz. Supported card types MIFARE Ultralight, DESFire 2K (EV1), DESFire 4K (EV1).
- The GCR3-11 is a design component of the iNELS system and is available in elegant black (GCR3-11/B) and white (GCR3-11/ W) variants.
- Input card reader is the first device of guest room management system (GRMS), with which the hotel guest comes into contact first and therefore was designed with an emphasis on representative design.
- Printing is possible to customize to the investor requirements. The room number as well as the logo of the hotel can be also printed on each component.
- The controller is also equipped with touch button with function of bell and with two icons to indicate the status of guest requests, e.g. "Do Not Disturb" and "Make Up Room", whose state guest can set from multi-function touch panel EHT3, glass card holder GCH3-31, glass switch buttons GSB3-20/S, GSB3-40/S, GSB3-60/S or such GSP3-100 glass switch panel.
- Individual symbols can be illuminated in one of seven colours - red, green, blue, yellow, pink, turquoise and white.
- Reader GCR3-11 is equipped with an 8A relay output with AgSnO_2 contact for door lock control.
- Reader GCR3-11 is equipped with a sensor for ambient light intensity. Based on information from the sensor it can e.g. switch the lighting circuits in the corridor.
- All versions are in the size of the module (94x94 mm) from the line of luxury switches and sockets LOGUS³⁰ and are therefore fully in line with the design of frames for the sockets of this series, where you can just as for the controllers choose white and black glass frames.
- GCR3-11 are designed for mounting into an installation box.

Connection

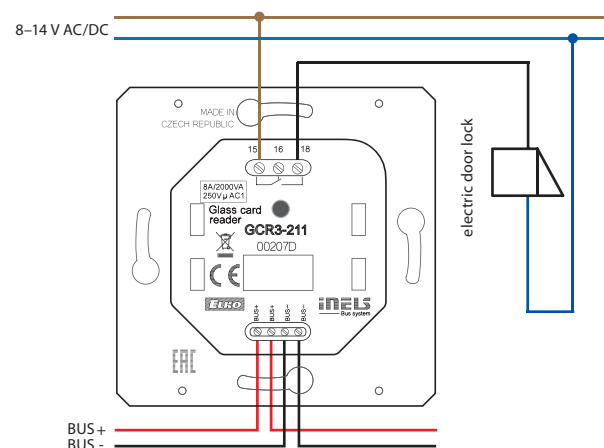

NEW



GCH3-231/B




GCH3-231/W

EAN code*The picture of device is illustrative, the icons (symbols) are configurable by the customer.

Technical parameters		GCH3-231
Input		
Illuminance sensor:		1 ... 100 000 Lx
Buttons		
Number of control buttons:		3
Type:		Capacitive
Indication:		Coloured illuminated symbol
RFID readers		
Supported frequencies:		13.56 MHz
Card Type:		MIFARE Ultralight, DESFire 2K (EV1), DESFire 4K (EV1)
Outputs		
Signalling:		Do Not Disturb, Make Up Room
Output:		1x changeover 8 A / AgSnO ₂
Acoustic output:		piezo-changer
Tactile output:		Vibration motor
Switching voltage:		230V AC/ 30V DC
Switching output:		2000 VA/AC1; 240 W/DC
Peak current:		20 A/<3s
Insulation voltage between relay outputs and internal circuits:		3.75 kV, SELV according to EN 60950
Minimal switched current:		10 mA / 10 V
Switching frequency without load:		300 min ⁻¹
Switching frequency with rated load:		10 min ⁻¹
Mechanical life:		1x 10 ⁷
Electrical life AC1:		1x 10 ⁵
Communication		
Installation BUS:		BUS
Power supply		
Supply voltage / tolerance:		27 V DC, -20 / +10 %
Dissipated power:		max. 2 W
Rated current:		100-120 mA (at 27V DC), from BUS
Connection		
Data:		terminals, 0.5 - 1 mm ²
Network:		max. 2.5 mm ² /1.5 mm ² with sleeve
Operating conditions		
Relative humidity:		max. 80 %
Operating temperature:		-20 .. +55 °C
Storing temperature:		-30 .. +70 °C
Protection degree:		IP20
Overvoltage category:		II.
Pollution degree:		2
Operation position:		any
Installation:		into installation box
Dimensions and weight		
Dimensions:		150 x 100 x 36 mm
Weight:		210 g

- Glass card holder GCH3-31 is part of a comprehensive range of glass iNELS control units for guest room management system (GRMS).
- GCH3-31 serves for inserting the RFID card into the holder, whereby the system acquires the information about whether the hotel guest is present in the room. With this information it is possible to ensure for example Exit function with relation to energy savings in the absence of a guest in the room.
- Glass card holder is a design component of the iNELS system and is available in elegant black (GCH3-31/B) and white (GCH3-31/W) version.
- The GCH3-31 component is equipped with an RFID reader and is thus able to identify the specific hotel card inserted. Power saving function in the absence of a guest cannot be bypassed by simply inserting business cards into the holder.
- GCH3-31 supports RFID media with a carrier frequency of 13.56 MHz. Supported card types are MIFARE Ultralight, DESFire 2K (EV1), DESFire 4K (EV1).
- The unit is also equipped with three touch buttons that can be used for example to set room status "Do Not Disturb" or "Make Up Room". This condition is then signalled to the glass card reader GCR3-11 or glass info panel GDB3-10 which are placed before the entrance to the room. Information may be sent directly to the hotel reception.
- Card holder printing is possible to customize to the investor requirements. The logo of the hotel can be shown for example. Likewise, it is also possible to adapt the card printing.
- The GCH3-31 unit is equipped with an 8A relay output and an AgSnO₂ contact.
- Individual symbols can be illuminated in one of seven colours - red, green, blue, yellow, pink, turquoise and white.
- GCH3-31 are designed for mounting into an installation box.

Connection

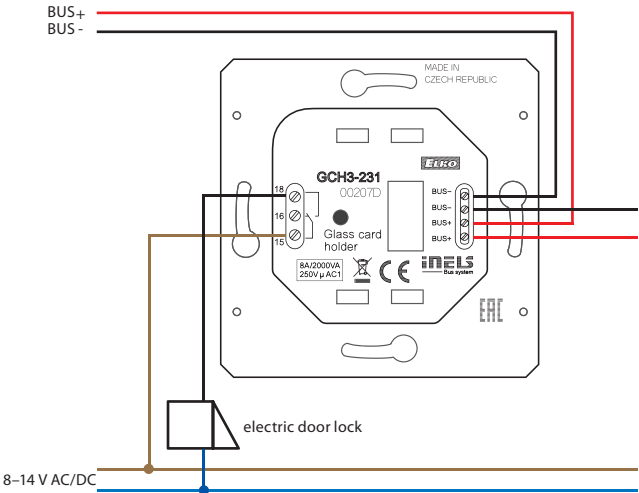

* Order codes of all colours are available in the iNELS price list.

NEW



EAN code
GDB3-210/B: 8595188176446
GDB3-210/W: 8595188176453


The picture of device is illustrative, the icons (symbols) are configurable by the customer.




Technical parameters		GDB3-210
Inputs		
Temperature measuring:		YES, built-in temperature sensor
Scope and accuracy of temp. measuring:		0.. +55°C; 0.3°C from the range
Inputs:		2x AIN/DIN
Resolution:		by setting 10-bit
External temperature sensor:		YES, the connection between AIN1/DIN1 and AIN2/DIN2
Type of external sensor:		TC/TZ
Temperature measurement range:		-20°C to +120°C
Temperature measurement accuracy:		0.5°C from the range
Illuminance sensor:		1 ... 100 000 Lx
Buttons		
Number of control buttons:		1
Type:		Capacitive
Indication:		Coloured illuminated symbol
Output		
Signalling:		Do Not Disturb, Make Up Room
Acoustic output:		piezo-changer
Tactile output:		Vibration motor
Communication		
Installation BUS:		BUS
Power supply		
Supply voltage / tolerance:		27 V DC, -20 / +10 %
Dissipated power:		max. 0.5 W
Rated current:		100-120 mA (at 27V DC), from BUS
Connection		
Terminals:		0.5 - 1 mm ²
Operating conditions		
Relative humidity:		max. 80 %
Operating temperature:		-20 .. +55 °C
Storing temperature:		-30 .. +70 °C
Protection degree:		IP20
Overvoltage category:		II.
Pollution degree:		2
Operation position:		on the wall, observing the conditions for correct installation of the thermostat
Installation:		into installation box
Dimensions and weight		
Dimensions:		100 x 100 x 36 mm
Weight:		154 g

- Glass info panel GDB3-10 is part of a comprehensive series of glass iNELS control units for guest room management system (GRMS), and is used to indicate the status of guest requests "Do Not Disturb" and "Make Up Room".
- Thanks to the capacitive touch button, the info panel can also be used for the function of the bell.
- Glass info panel is a design component of the iNELS system and is available in elegant black (GDB3-10/B) and white (GDB3-10/W) version.
- Info panel printing is possible to customize to the investor requirements. The room number as well as the logo of the hotel can be also printed on each component.
- The "Do Not Disturb" or "Make Up Room" statuses can be entered by the hotel guest from a multi-functional touch panel EHT3, glass card holder GCH3-31, glass switch buttons GSB3-20/S, GSB3-40/S, GSB3-60/S or such GSP3-100 glass switch panel.
- All versions are in the size of the module (94x94 mm) from the line of luxury switches and sockets LOGUS⁹⁰ and are therefore fully in line with the design of frames for the sockets of this series, where you can just as for the controllers choose white and black glass frames.
- Info panel GDB3-10 is equipped with a sensor for ambient light intensity. Based on information from the sensor it can e.g. switch the lighting circuits in the corridor.
- Individual symbols can be illuminated in one of seven colours - red, green, blue, yellow, pink, turquoise and white.
- GDB3-10 are designed for mounting into an installation box.

Connection

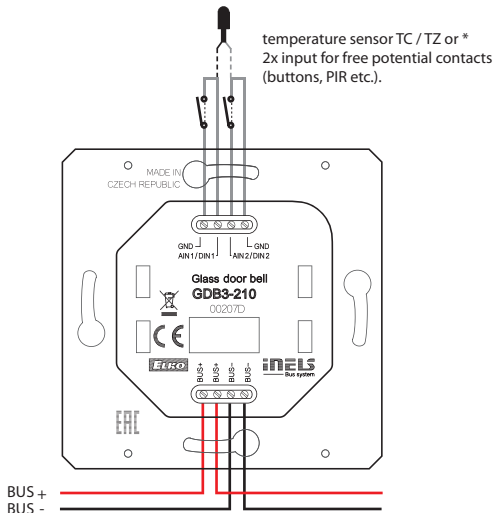

* The choice is made in iDM3 for each unit separately.

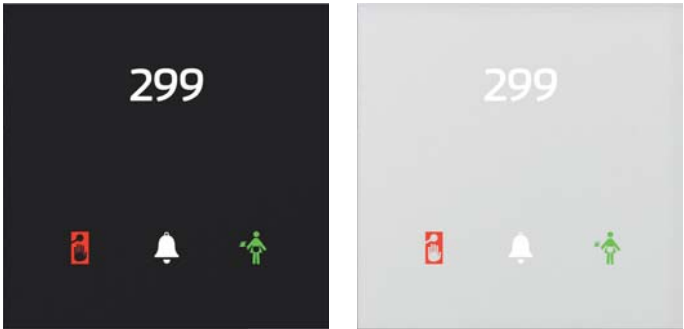



EAN code
GCR3-11/B: 8595188157476
GCR3-11/W: 8595188157483

The picture of device is illustrative, the icons (symbols) are configurable by the customer.
GCR3-11/PRO/B: 8595188175036
GCR3-11/PRO/W: 8595188175043

Technical parameters		GCR3-11
Input		
Illuminance sensor:		1 ... 100 000 Lx
Buttons		
Number of control buttons:		3
Type:		Capacitive
Indication:		Coloured illuminated symbol
RFID readers		
Supported frequencies:		13.56 MHz
Card Type:		MIFARE Ultralight, DESFire 2K (EV1), DESFire 4K (EV1)
Outputs		
Signalling:		Do Not Disturb, Make Up Room
Output:		1x changeover 8 A / AgSnO ₂
Acoustic output:		piezo- changer
Tactile output:		Vibration motor
Switching voltage:		230V AC/ 30V DC
Switching output:		2000 VA/AC1; 240 W/DC
Peak current:		20 A/<3s
Insulation voltage between relay outputs and internal circuits:		3.75 kV, SELV according to EN 60950
Minimal switched current:		10 mA / 10 V
Switching frequency without load:		300 min ⁻¹
Switching frequency with rated load:		10 min ⁻¹
Mechanical life:		1x 10 ⁷
Electrical life AC1:		1x 10 ⁵
Communication		
Installation BUS:		BUS
Power supply		
Supply voltage / tolerance:		27 V DC, -20 / +10 %
Dissipated power:		max. 0.5 W
Rated current:		100-130 mA (at 27V DC), from BUS
Connection		
Data:		terminals, 0.5 - 1 mm ²
Network:		max. 2.5 mm ² /1.5 mm ² with sleeve
Operating conditions		
Relative humidity:		max. 80 %
Operating temperature:		-20 .. +55 °C
Storing temperature:		-30 .. +70 °C
Protection degree:		IP20
Overvoltage category:		II.
Pollution degree:		2
Operation position:		any
Installation:		into installation box
Dimensions and weight		
Dimensions:		94 x 94 x 36 mm
Weight:		161 g

- Glass RFID card reader GCR3-11 is part of a comprehensive range of glass iNELS control units and can be advantageously used in all projects, e.g. guest room management system (GRMS).
- The iNELS BUS system portfolio includes an innovated range of glass controls with proximity sensors. Regardless of environmental conditions, the controls are able to detect a passing person or hand gestures. Among other things, the new range of units allows you to regulate the backlight level in several stages, which can be used to control the unit mainly at night when the unit switches on the backlight of symbols and does not disturb the others present eg when watching TV or sleeping.
- GCR3-11 card reader is designed for reading smart cards, which are intended to enter the hotel room or any other part of the building.
- GCR3-11 supports RFID media with a carrier frequency of 13.56 MHz. Supported card types MIFARE Ultralight, DESFire 2K (EV1), DESFire 4K (EV1).
- The GCR3-11 is a design component of the iNELS system and is available in elegant black (GCR3-11/B) and white (GCR3-11/ W) variants.
- Input card reader is the first device of guest room management system (GRMS), with which the hotel guest comes into contact first and therefore was designed with an emphasis on representative design.
- Printing is possible to customize to the investor requirements. The room number as well as the logo of the hotel can be also printed on each component.
- The controller is also equipped with touch button with function of bell and with two icons to indicate the status of guest requests, e.g. "Do Not Disturb" and "Make Up Room", whose state guest can set from multi-function touch panel EHT3, glass card holder GCH3-31, glass switch buttons GSB3-20/S, GSB3-40/S, GSB3-60/S or such GSP3-100 glass switch panel.
- Individual symbols can be illuminated in one of seven colours - red, green, blue, yellow, pink, turquoise and white.
- Reader GCR3-11 is equipped with an 8A relay output with AgSnO₂ contact for door lock control.
- Reader GCR3-11 is equipped with a sensor for ambient light intensity. Based on information from the sensor it can e.g. switch the lighting circuits in the corridor.
- All versions are in the size of the module (94x94 mm) from the line of luxury switches and sockets LOGUS⁹⁰ and are therefore fully in line with the design of frames for the sockets of this series, where you can just as for the controllers choose white and black glass frames.
- GCR3-11 are designed for mounting into an installation box.

Connection

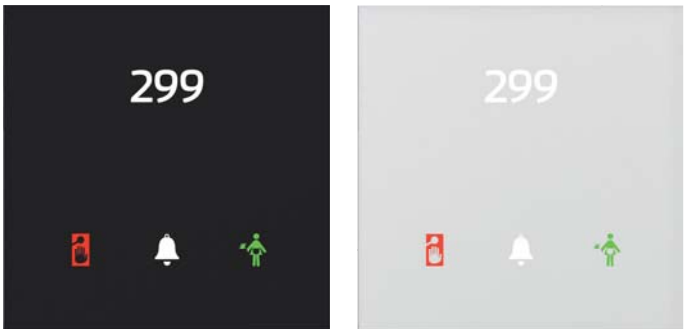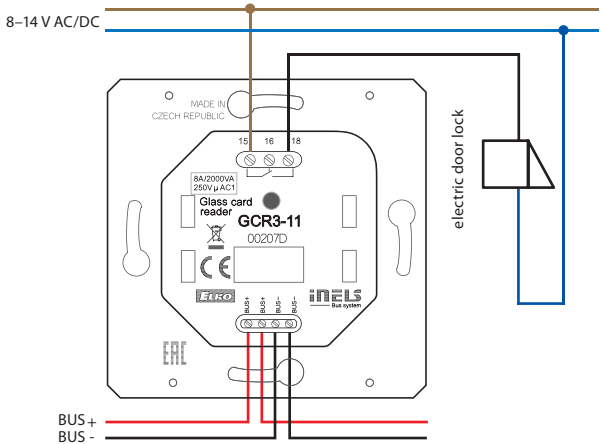


EAN code
GDB3-10/B: 8595188157261
GDB3-10/W: 8595188115728

The picture of device is illustrative, the icons (symbols) are configurable by the customer.
GDB3-10/PRO/B: 8595188176286
GDB3-10/PRO/W: 8595188176293

Technical parameters		GDB3-10
Inputs		
Temperature measuring:		YES, built-in temperature sensor
Scope and accuracy of temp. measuring:		0.. +55°C; 0.3°C from the range
Inputs:		2x AIN/DIN
Resolution:		by setting 10-bit
External temperature sensor:		YES, the connection between AIN1/DIN1 and AIN2/DIN2
Type of external sensor:		TC/TZ
Temperature measurement range:		-20°C to +120°C
Temperature measurement accuracy:		0.5°C from the range
Illuminance sensor:		1 ... 100 000 Lx
Buttons		
Number of control buttons:		1
Type:		Capacitive
Indication:		Coloured illuminated symbol
Output		
Signalling:		Do Not Disturb, Make Up Room
Acoustic output:		piezo- changer
Tactile output:		Vibration motor
Communication		
Installation BUS:		BUS
Power supply		
Supply voltage / tolerance:		27 V DC, -20 / +10 %
Dissipated power:		max. 0.5 W
Rated current:		100-120 mA (at 27V DC), from BUS
Connection		
Terminals:		0.5 - 1 mm ²
Operating conditions		
Relative humidity:		max. 80 %
Operating temperature:		-20 .. +55 °C
Storing temperature:		-30 .. +70 °C
Protection degree:		IP20
Overvoltage category:		II.
Pollution degree:		2
Operation position:		on the wall, observing the conditions for correct installation of the thermostat
Installation:		into installation box
Dimensions and weight		
Dimensions:		94 x 94 x 36 mm
Weight:		154 g

- Glass info panel GDB3-10 is part of a comprehensive series of glass iNELS control units for guest room management system (GRMS), and is used to indicate the status of guest requests "Do Not Disturb" and "Make Up Room".
- The iNELS BUS system portfolio includes an innovated range of glass controls with proximity sensors. Regardless of environmental conditions, the controls are able to detect a passing person or hand gestures. Among other things, the new range of units allows you to regulate the backlight level in several stages, which can be used to control the unit mainly at night when the unit switches on the backlight of symbols and does not disturb the others present eg when watching TV or sleeping.
- Thanks to the capacitive touch button, the info panel can also be used for the function of the bell.
- Glass info panel is a design component of the iNELS system and is available in elegant black (GDB3-10/B) and white (GDB3-10/W) version.
- Info panel printing is possible to customize to the investor requirements. The room number as well as the logo of the hotel can be also printed on each component.
- The "Do Not Disturb" or "Make Up Room" statuses can be entered by the hotel guest from a multi-functional touch panel EHT3, glass card holder GCH3-31, glass switch buttons GSB3-20/S, GSB3-40/S, GSB3-60/S or such GSP3-100 glass switch panel.
- All versions are in the size of the module (94x94 mm) from the line of luxury switches and sockets LOGUS⁹⁰ and are therefore fully in line with the design of frames for the sockets of this series, where you can just as for the controllers choose white and black glass frames.
- Info panel GDB3-10 is equipped with a sensor for ambient light intensity. Based on information from the sensor it can e.g. switch the lighting circuits in the corridor.
- Individual symbols can be illuminated in one of seven colours - red, green, blue, yellow, pink, turquoise and white.
- GDB3-10 are designed for mounting into an installation box.

Connection

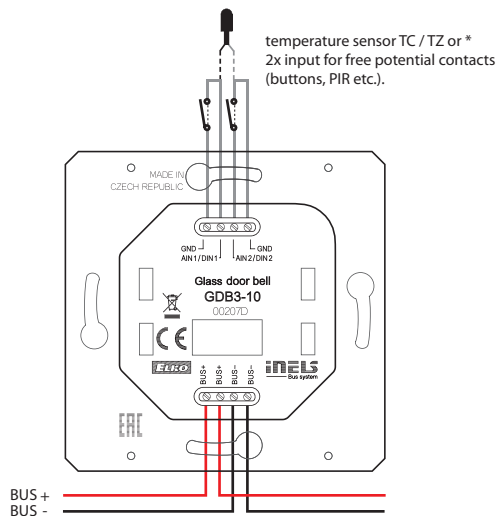

* The choice is made in iDM3 for each unit separately.




EAN code*
The picture of device is illustrative, the icons (symbols) are configurable by the customer.

Technical parameters		GCH3-31
Input		
Illuminance sensor:		1 ... 100 000 Lx
Buttons		
Number of control buttons:		3
Typ:		Capacitive
Indication:		Coloured illuminated symbol
RFID readers		
Supported frequencies:		13.56 MHz
Card Type:		MIFARE Ultralight, DESFire 2K (EV1), DESFire 4K (EV1)
Outputs		
Signalling:		Do Not Disturb, Make Up Room
Output:		1x changeover 8 A / AgSnO ₂
Acoustic output:		piezo-changer
Tactile output:		Vibration motor
Switching voltage:		230V AC/ 30V DC
Switching output:		2000 VA/AC1; 240 W/DC
Peak current:		20 A/<3s
Insulation voltage between relay outputs and internal circuits:		3.75 kV, SELV according to EN 60950
Minimal switched current:		10 mA / 10 V
Switching frequency without load:		300 min ⁻¹
Switching frequency with rated load:		10 min ⁻¹
Mechanical life:		1x 10 ⁷
Electrical life AC1:		1x 10 ⁵
Communication		
Installation BUS:		BUS
Power supply		
Supply voltage / tolerance:		27 V DC, -20 / +10 %
Dissipated power:		max. 2 W
Rated current:		100-120 mA (at 27V DC), from BUS
Connection		
Data:		terminals, 0.5 - 1 mm ²
Network:		max. 2.5 mm ² /1.5 mm ² with sleeve
Operating conditions		
Relative humidity:		max. 80 %
Operating temperature:		-20 .. +55 °C
Storing temperature:		-30 .. +70 °C
Protection degree:		IP20
Overvoltage category:		II.
Pollution degree:		2
Operation position:		any
Installation:		into installation box
Dimensions and weight		
Dimensions:		142 x 94 x 36 mm
Weight:		210 g

- Glass card holder GCH3-31 is part of a comprehensive range of glass iNELS control units for guest room management system (GRMS).
- GCH3-31 serves for inserting the RFID card into the holder, whereby the system acquires the information about whether the hotel guest is present in the room. With this information it is possible to ensure for example Exit function with relation to energy savings in the absence of a guest in the room.
- Glass card holder is a design component of the iNELS system and is available in elegant black (GCH3-31/B) and white (GCH3-31/W) version.
- The GCH3-31 component is equipped with an RFID reader and is thus able to identify the specific hotel card inserted. Power saving function in the absence of a guest cannot be bypassed by simply inserting business cards into the holder.
- GCH3-31 supports RFID media with a carrier frequency of 13.56 MHz. Supported card types are MIFARE Ultralight, DESFire 2K (EV1), DESFire 4K (EV1).
- The unit is also equipped with three touch buttons that can be used for example to set room status "Do Not Disturb" or "Make Up Room". This condition is then signalled to the glass card reader GCR3-11 or glass info panel GDB3-10 which are placed before the entrance to the room. Information may be sent directly to the hotel reception.
- Card holder printing is possible to customize to the investor requirements. The logo of the hotel can be shown for example. Likewise, it is also possible to adapt the card printing.
- The GCH3-31 unit is equipped with an 8A relay output and an AgSnO₂ contact.
- Individual symbols can be illuminated in one of seven colours - red, green, blue, yellow, pink, turquoise and white.
- GCH3-31 are designed for mounting into an installation box.

Connection

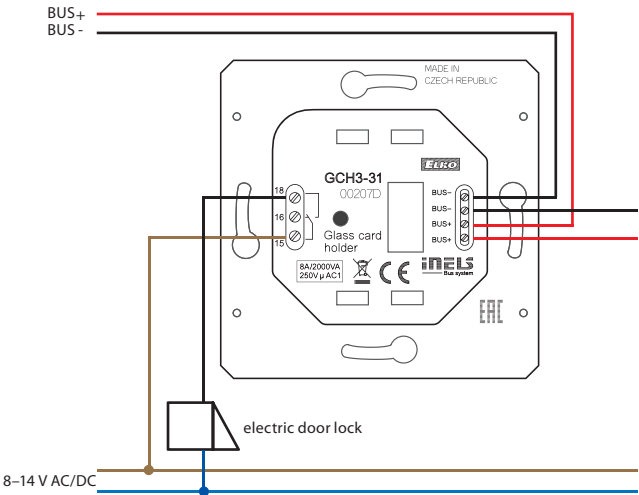

* Order codes of all colours are available in the iNELS price list.




EAN code*
EHT3 (white frame, white intermediate frame, white back cover): 8595188156196


Technical parameters		EHT3
Display		
Type:		colored TFT LCD
Aspect ratio:		3:4
Visible area:		52.5 x 70 mm
Backlight:		active
Touchpad:		4-wire resistive
Display:		3.5"
Number of points:		240 x 320
Color Depth:		16.7M (24 bit color)
Power supply		
Supply voltage / tolerance:		27 V DC, -20 / +10 %
Rated current:		150 mA (at 27V DC)
Connection		
Connection:		terminals
Connecting conductors profile:		max. 2.5 / 1.5 mm ² with sleeve
Operating conditions		
Operating temperature:		0 to +55°C
Storing temperature:		- 20 to +70°C
Protection degree:		IP20
Overvoltage category:		II.
Pollution degree:		2
Operating position:		any
Installation:		installation box
Dimensions and weight		
Dimensions:		94 x 94 x 36 mm
Weight**		127 g

* Order codes of all colours are available in the iNELS price list.
** Weight is listed with plastic frame.

- The control unit with touch screen EHT 3 is a suitable control element for iNELS in places where it is required to control multiple devices. The unit replaces multiple controllers and allows minimisation of the number of switches on the wall.
- EHT3 control unit is also available in glass frames in black or white and is thus part of a comprehensive glass iNELS series of units for the management of the hotel rooms (GRMS).
- The EHT3 is primarily designed to control hotel rooms (Guest Room Management System), but it can also be used it in other projects such as a multi-function control panel.
- EHT3 offers a user-friendly interface to control the hotel room; it was designed so that guests could easily create an environment that allows them to feel like home.
- Changing the Graphical Interface is possible in consultation with the manufacturer to adapt it to specific hotel, office building and restaurant projects.
- With the units it is possible to adjust the temperature (a version is available with the possibility to adjust the fan speed of fan coil units), light scenes, shading, music and it is also possible to transmit information "Do Not Disturb" and "Make Up Room"
- The unit enables the control of volume, choice of Internet radio stations from the LARA Radio player.
- "Do Not Disturb" and "Make Up Room" information about the state of the rooms can be visualized on a GHR3-11 glass reader or GDB3-10glass info panel, which is located in the corridor at the entrance to the room, and it is also possible to send the information of these events directly to the front desk to inform staff.
- EHT3 features a 3.5" color touchscreen with an aspect ratio of 3:4. The basic display resolution is 240 x 320 pixels. The color depth is 16.7 million colors (24 bit color, True Color).
- Using the sensor touchpad, buttons and symbols can be operated on the screen by a gentle touch of a finger. The symbols on the screen are by "pressing" animate an associated outlet in the system.
- EHT3 design is drawn into a row of instruments LOGUS⁹⁰ (EHT3 but you cannot install into multi-frames with other devices in this design) and is designed for mounting into installation box.

Connection

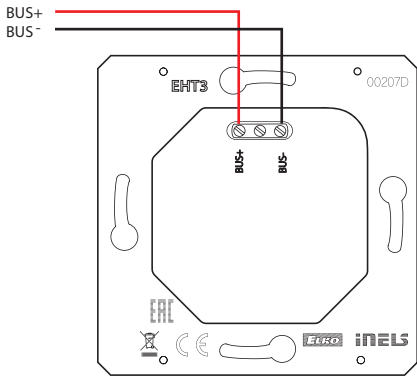

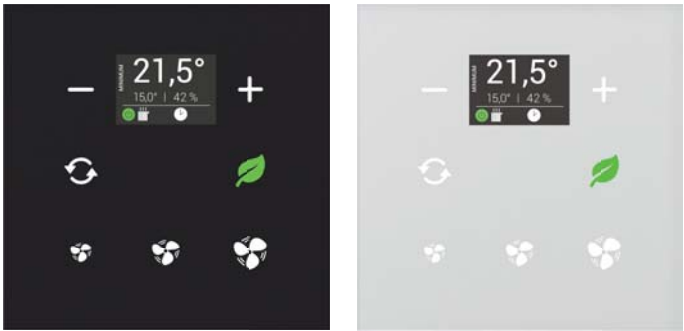


EAN code The picture of device is illustrative, the icons (symbols) are configurable by the customer.
GRT3-50/B: 8595188156301
GRT3-50/W: 8595188156349


Technical parameters		GRT3-50
Inputs		
Temperature measuring:	YES, built-in temperature sensor	
Scope and accuracy of temp. measurement:	0.. +55°C; 0.3°C from the range	
Humidity measurement:	YES	
Humidity measurement range:	0 to 99% RH	
Humidity measurement accuracy:	± 3 % Relative humidity	
Inputs:	2x AIN/DIN	
Resolution:	by setting 10-bit	
External temperature sensor:	YES, the connection between AIN1/DIN1 and AIN2/DIN2	
Type of external sensor:	TC/TZ	
Temperature measurement range:	-20°C to +120°C	
Temperature measurement accuracy:	0.5°C from the range	
Buttons		
Number of control buttons:	5	
Type:	Capacitive	
Indication:	Coloured illuminated symbol	
Display		
Display:	colored TFT, 20 x 25.5 mm	
Resolution:	240 x 240 pixels	
Outputs		
Acoustic output:	piezo-changer	
Tactile output:	Vibration motor	
Communication		
Installation BUS:	BUS	
Power supply		
Supply voltage / tolerance:	27 V DC, -20 / +10 %	
Dissipated power:	max. 0.5 W	
Rated current:	85 mA (at 27V DC), from BUS	
Connection		
Terminals:	0.5 - 1 mm²	
Operating conditions		
Relative humidity:	max. 80 %	
Operating temperature:	-20 .. +55 °C	
Storing temperature:	-30 .. +70 °C	
Protection degree:	IP20	
Overvoltage category:	II.	
Pollution degree:	2	
Operation position:	any	
Installation:	on the wall, observing the conditions for correct installation of the thermostat	
Dimensions and weight		
Dimensions:	94 x 94 x 36 mm	
Weight:	156 g	

- Glass room thermo-regulator GRT3-50 is part of a comprehensive range of glass iNELS control units for guest room management system (GRMS) and serves to regulate the temperature in the room.
- GRT3-50 thermo-regulator has a display for displaying the current room temperature and desired temperature. To adjust the required temperature, it is possible to use the touch buttons with symbols "-" and "+".
- GRT3-50 is also suitable for controlling fan coils and fan speed can be easily adjusted by using the touch buttons with symbols.
- Thermo-regulator GRT3-50 also has a further two touch buttons whose function can be adjusted by software, for example fan coil on/off, heating/cooling or comfort temperature for heating or cooling.
- Thermo-regulator is equipped with an integrated temperature sensor for ambient temperature measurement.
- The glass room thermo-regulator is a design component of the iNELS system and is available in elegant black (GRT3-50/B) and white (GRT3-50/W) version.
- Printing is possible to customize to the investor requirements.
- Individual symbols can be illuminated in one of seven colours - red, green, blue, yellow, pink, turquoise and white.
- GRT3-50 are designed for mounting into an installation box.


Connection

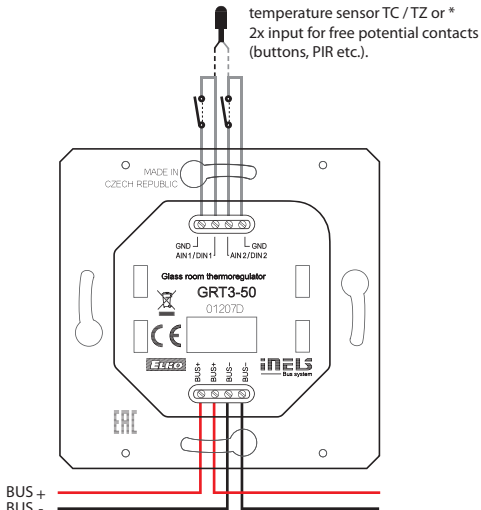

* The choice is made in iDM3 for each unit separately.

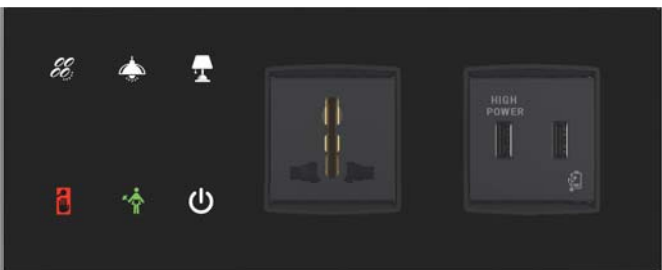

GBP3-60/BR/2F

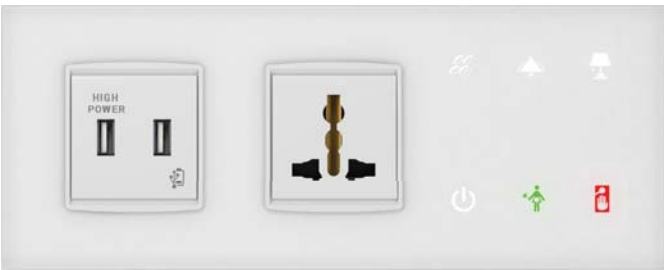

GBP3-60/WL/2F

EAN code*

The picture of device is illustrative, the icons (symbols) and wiring accessories are configurable by the customer.


Technical parameters		GBP3-60
Inputs		
Inputs:	2x AIN/DIN	
Resolution:	by setting 10-bit	
External temperature sensor:	YES, the connection between AIN1/DIN1 and AIN2/DIN2	
Type of external sensor:	TC/TZ	
Temperature measurement range:	-20°C to +120°C	
Temperature measurement accuracy:	0.5°C from the range	
Illuminance sensor:	1 ... 100 000 Lx	
Buttons		
Number of control buttons:	6	
Type:	Capacitive	
Indication:	Coloured illuminated symbol	
Outputs		
Acoustic output:	piezo-changer	
Tactile output:	Vibration motor	
Communication		
Installation BUS:	BUS	
Power supply		
Supply voltage / tolerance:	27 V DC, -20 / +10 %	
Dissipated power:	max. 0.5 W	
Rated current:	25-50 mA (at 27V DC), from BUS	
Connection		
Terminals:	0.5 - 1 mm²	
Operating conditions		
Relative humidity:	max. 80 %	
Operating temperature:	-20 .. +55 °C	
Storing temperature:	-30 .. +70 °C	
Protection degree:	IP20	
Overvoltage category:	II.	
Pollution degree:	2	
Operation position:	any	
Installation:	on the wall, observing the conditions for correct installation of the thermostat	
Dimensions and weight		
Dimensions:	GBP3-60/1F: 165 x 94 x 36 mm, GBP3-60/2F: 236 x 94 x 36 mm	
Weight:	according to the selected module	

* Order codes are available in the iNELS price list.

- Glass bedside panel GBP3-60 is part of a comprehensive range of iNELS control units for guest room management system (GRMS). Bedside panel is composed from three modules, of which one is module of touch buttons and two are modules to power for example mobile devices.
- The iNELS BUS system portfolio includes an innovated range of glass controls with proximity sensors. Regardless of environmental conditions, the controls are able to detect a passing person or hand gestures. Among other things, the new range of units allows you to regulate the backlight level in several stages, which can be used to control the unit mainly at night when the unit switches on the backlight of symbols and does not disturb the others present eg when watching TV or sleeping.
- The GBP3-60 is available in several designs, making it a very flexible and effective solution for a variety of projects. The following variants are available:
 - Left / Right version provides the same ease of operation from both sides of the bed.
 - 2-module (1F) / 3-module (2F) design enables you to add a touch module with one or two power supply modules, network connection or multimedia.
 - Black / White elegant design suitable for almost any interior.
- GBP3-60 panel is equipped with six customizable touch buttons whose function can be software adapted to the requirements of the investor. Of course there is the possibility of using the "Master OFF", then you can select functions for switching and dimming of lighting, shading control, different scenarios etc.
- Printing is possible to customize to the investor requirements.
- GBP3-60 can be equipped with a number of modules, for example.
 - Power AC sockets: French, British, Multi, and Shockproof
 - Other types of modules: USB, LAN, Media
- The GBP3-60 panel is equipped with an ambient light sensor.
- Individual symbols can be illuminated in one of three colours - red, green and blue.
- GBP3-60/1F is designed for mounting into a double mounting box, GBP3-60/2F to a triple mounting box (distance between the centres of each of openings is 71 mm).


Connection

GBP3-60/xR/2F-23x-20x

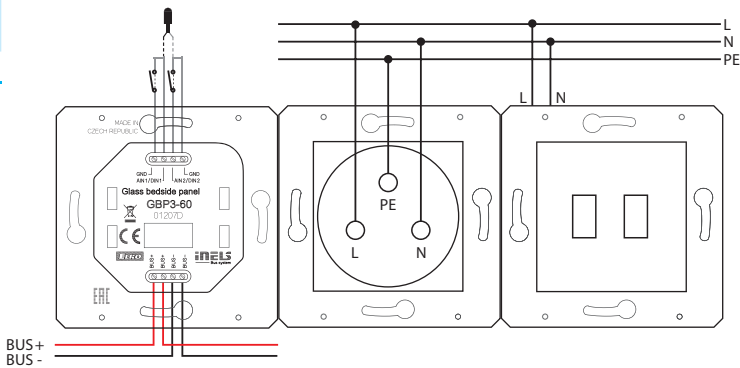

Switch


Push button



One switch / 1M

11B (20001)


11W (20001.B)



One switch / 2M

12B (20001.2)


12W (20001.2.B)



Three switches

14B (20003)


14W (20003.B)



One Push button / 1M

49B (20008)

49W (20008.B)




One Push button / 2M

50B (20008.7)

50W (20008.7.B)


Socket



USA outlet

21B (20242)


21W (20242.B)



Schuko outlet

22B (20208)


22W (20208.B)



French outlet

23B (20212)


23W (20212.B)



3 PIN outlet

24B (20214)

24W (20214.B)



British outlet

25B (20219)

25W (20219.B)




Multistandard outlet

26B (20257)

26W (20257.B)


Data & Audio/Video



USB power supply unit

20B (20295)


20W (20295.B)



TV-FM-SAT socket outlet

31B (20303)


31W (20303.B)



VGA connector

32B (20348)


32W (20348.B)



TV outlet

41B (20313)


41W (20313.B)



Phone outlet

42B (20320)


42W (20320.B)



A/V connectors

43B (20335)


43W (20335.B)



UTP outlet

44B (20337.6)


44W (20337.6.B)



USB supply unit

48B (20292)


48W (20292.B)



Switch (CBs)

46B (20405.06)


46W (20405.06.B)



HDMI connector

47B (20346.H)

47W (20346.H.B)



USB outlet

45B (20345)

45W (20345.B)

(Number in brackets is original Vimar product code)

Glass Bedside Panel

Configure bedside panel according to your request.

L (left option)



position 2

position 1

GBP3-60/WL/2F-26W-20W

R (right option)



position 1


position 2

GBP3-60/BR/2F-26B-11B44B



position 1

GBP3-60/WL/1F-20W

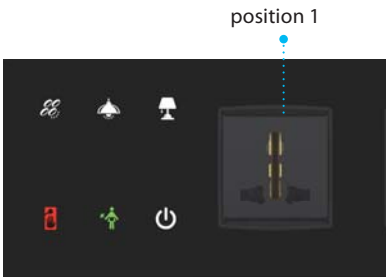

position 1

GBP3-60/BR/1F-26B

Part number

Glass

button

panel

iNELS3

6 buttons

GBP3-60

/xx/xF

-x-x

color

B / W

(black / white)

type

L / R

(left / right)

number of frame

1 / 2

position 1

our product code(s)*

position 2


our product code(s)*

* In case of 1-module choice it is necessary to pick **2x** 1-module to fill up the 1 position, for example GBP3-60/WL/1F-**21W45W**.


Classic plate




Glass white ice / 2M



Glass black ice / 2M





Glass black ice / 3M



Glass black ice / 4M

If you have any question contact our sales representative.
For more information: www.vimar.com/en/int/catalog/product



EAN code
GSB3-20/SB: 8595188156219
GSB3-40/SB: 8595188156233
GSB3-60/SB: 8595188156257
GSB3-20/PRO/SB: 8595188175081
GSB3-40/PRO/SB: 8595188175067
GSB3-60/PRO/SB: 8595188174862

The picture of device is illustrative, the icons (symbols) are configurable by the customer.

Technical parameters				GSB3-20/S	GSB3-40/S	GSB3-60/S
Inputs						
Temperature measuring:		YES, built-in temperature sensor				
Scope and accuracy of temp. measurement:		0.. +55°C; 0.3°C from the range				
Inputs:		2x AIN/DIN				
Resolution:		by setting 10-bit				
External temperature sensor:		YES, the connection between AIN1/DIN1 and AIN2/DIN2				
Type of external sensor:		TC/TZ				
Temperature measurement range:		-20°C to +120°C				
Temperature measurement accuracy:		0.5°C from the range				
Illuminance sensor:		1 ... 100 000 Lx				
Buttons						
Number of control buttons:		2	4	6		
Type:		Capacitive				
Indication:		Coloured illuminated symbol				
Outputs						
Acoustic output:		piezo-changer				
Tactile output:		Vibration motor				
Communication						
Installation BUS:		BUS				
Power supply						
Supply voltage / tolerance:		27 V DC, -20 / +10 %				
Dissipated power:		max. 0.5 W				
Rated current:		25-35 mA	25-43 mA	25-50 mA		
		(at 27V DC), from BUS				
Connection						
Terminals:		0.5 - 1 mm²				
Operating conditions						
Relative humidity:		max. 80 %				
Operating temperature:		-20 .. +55 °C				
Storing temperature:		-30 .. +70 °C				
Protection degree:		IP20				
Overvoltage category:		II.				
Pollution degree:		2				
Operation position:		any				
Installation:		on the wall, observing the conditions for correct installation of the thermostat				
Dimensions and weight						
Dimensions:		94 x 94 x 36 mm				
Weight:		154 g				



- Glass touch controllers with symbols GSB3-20/S, GSB3-40/S and GSB3-60/S are part of a comprehensive range of glass iNELS control units and can be advantageously used in all projects for example as a part of guest room management system (GRMS).
- The iNELS BUS system portfolio includes an innovated range of glass controls with proximity sensors. Regardless of environmental conditions, the controls are able to detect a passing person or hand gestures. Among other things, the new range of units allows you to regulate the backlight level in several stages, which can be used to control the unit mainly at night when the unit switches on the backlight of symbols and does not disturb the others present eg when watching TV or sleeping.
- GSB3-20/S is equipped with two, GSB3-40/S with four and GSB3-60/S six touch buttons whose functions can easily modify by the software.
- Printing is possible to customize to the investor requirements.
- Individual symbols can be illuminated in one of seven colours - red, green, blue, yellow, pink, turquoise and white.
- Glass touch panel is a design component of the iNELS system and is available in elegant black (GSB3-20/SB, GSB3-40/SB, GSB3-60/SB) and white (GSB3-20/SW, GSB3-40/SW, GSB3-60/SW) versions.
- All versions are in the size of the module (94x94 mm) from the line of luxury switches and sockets LOGUS⁹⁰ and are therefore fully in line with the design of frames for the sockets of this series, where you can just as for the controllers choose white and black glass frames.
- The glass touch controllers is equipped with an integrated temperature sensor. It is also equipped with two analog-to-digital inputs (AIN/ DIN), which can be used to connect two potential-free contacts or one external temperature sensor TC/TZ (for example temperature measurement of the floor).
- The glass touch controllers are also equipped with a sensor of ambient light intensity. Based on information from the sensor it can switch backlight of symbols or perform various actions in the iDM3 software, for example also switch the lighting circuits in the room.
- Advantages over conventional switches / buttons are saving space, signalling the state of any system output, the ability to measure temperature as well as the ability to connect external buttons or detectors.
- Each button can control any actuator (appliance) in the system. Also, you can assign each button a different function or macro (set of functions). It is therefore possible to use one button to control several appliances at once.
- GSB3-20/S, GSB3-40/S, and GSB3-60/S are designed for mounting into an installation box.




EAN code
GSB3-20/SW: 8595188156226
GSB3-40/SW: 8595188156240
GSB3-60/SW: 8595188156264
GSB3-20/PRO/SW: 8595188175098
GSB3-40/PRO/SW: 8595188175074
GSB3-60/PRO/SW: 8595188175050

The picture of device is illustrative, the icons (symbols) are configurable by the customer.

Connection

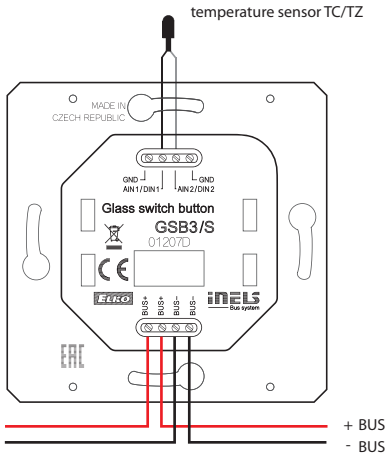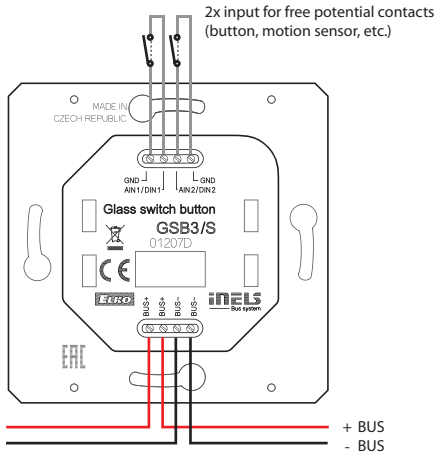


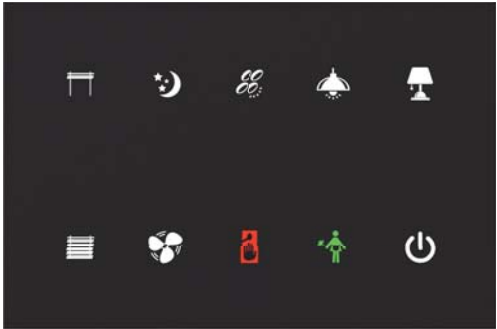

EAN code*
GSP3-100/B: 8595188156288
GSP3-100/W: 8595188156325

GSP3-100/PRO/B: 8595188174848
GSP3-100/PRO/W: 8595188175012


Technical parameters		GSP3-100
Inputs		
Temperature measuring:	YES, built-in temperature sensor	
Scope and accuracy of temp. measurement:	0.. +55°C; 0.3°C from the range	
Inputs:	2x AIN/DIN	
Resolution:	by setting 10-bit	
External temperature sensor:	YES, the connection between AIN1/DIN1 and AIN2/DIN2	
Type of external sensor:	TC/TZ	
Temperature measurement range:	-20°C to +120°C	
Temperature measurement accuracy:	0.5°C from the range	
Buttons		
Number of control buttons:	10	
Type:	Capacitive	
Indication:	Coloured illuminated symbol	
Outputs		
Acoustic output:	piezo-changer	
Tactile output:	Vibration motor	
Communication		
Installation BUS:	BUS	
Power supply		
Supply voltage / tolerance:	27 V DC, -20 / +10 %	
Dissipated power:	max. 0.5 W	
Rated current:	25-65 mA (at 27V DC), from BUS	
Connection		
Terminals:	0.5 - 1 mm²	
Operating conditions		
Relative humidity:	max. 80 %	
Operating temperature:	-20 .. +55 °C	
Storing temperature:	-30 .. +70 °C	
Protection degree:	IP20	
Overvoltage category:	II.	
Pollution degree:	2	
Operation position:	any	
Installation:	on the wall, observing the conditions for correct installation of the thermostat	
Dimensions and weight		
Dimensions:	142 x 94 x 36 mm	
Weight:	208 g	

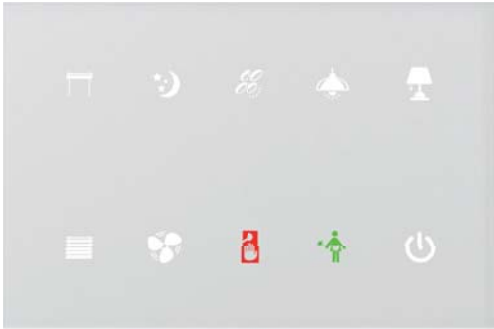

The picture of device is illustrative, the icons (symbols) are configurable by the customer.

- Glass Touch Panel GSP3-100 is part of a comprehensive iNELS series of units for the management of the hotel rooms (GRMS), but the unit can be used wherever it is required to control multiple devices from one location.
- The iNELS BUS system portfolio includes an innovated range of glass controls with proximity sensors. Regardless of environmental conditions, the controls are able to detect a passing person or hand gestures. Among other things, the new range of units allows you to regulate the backlight level in several stages, which can be used to control the unit mainly at night when the unit switches on the backlight of symbols and does not disturb the others present eg when watching TV or sleeping.
- GSP3-100 is equipped with ten touch buttons whose functions can easily be edited using the software.
- The graphics of individual symbols are possible based on consultations with manufacturers to change and adapt to the requirements of the investor.
- Individual symbols can be any one of seven backlight colours - red, green, blue, yellow, pink, turquoise and white.
- Glass touch panel is a design component of the iNELS system and is available in elegant black (GSP3-100/B) and white (GSP3-100/W) versions.
- Compared with standard glass touchscreen controllers with symbols GSB3-20/SB, GSB3-20/SW, GSB3-40/SB, GSB3-40/SW, GSB3-60/SB and GSB3-60/SW the GSP3-100 is one and a half times the width.
- The touch panel is equipped with an integrated temperature sensor. It is also equipped with two analogue-to-digital inputs (AIN/DIN), which can be used to connect two potential free contacts or one external temperature sensor TC / TZ (e.g. For measuring the temperature of the floor).
- The touch panel is also equipped with an ambient light intensity sensor. Based on information from the sensor it can light up indicative illumination symbols or perform various actions with the iDM3 software, e.g. To also switch the lighting circuits in the room.
- Advantages over conventional switches / buttons is saving space, signalling the state of any system output, the ability to measure temperature and an option to connect external pushbuttons or detectors.
- Each button can control any actuator (appliance) in the system. Also, you can assign a different function or macro (set of functions) to each button. It is therefore possible to use one button to control several appliances.
- GSP3-100 is designed for mounting into an installation box.

Connection

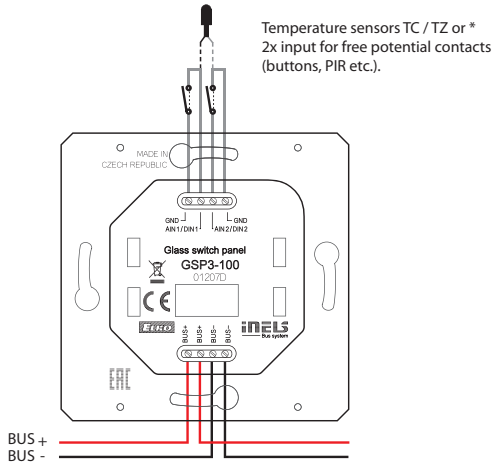

* The choice is made in iDM3 for each unit separately.

Building Management System

Modern solutions for house and building projects.



www.inels.com



INELS NIAGARA



Buildings today are equipped with an array of systems to control HVAC (heating, ventilation and air conditioning), lighting, shading, security, GRMS (Guest Room Management System), energy management, emergency lighting, fire alarms, CCTV, access control systems, elevators and other technologies. Effective integration and communication among the various systems in the building is critical to creating a comfortable environment for all users, to reduce building operation costs and reduce carbon dioxide emissions required for the operation of buildings. iNELS is a great solution for a variety of jobs, particularly in the areas of lighting, shading and GRMS (Guest Room Management System), and thanks to its modular and flexible topology it is used in commercial projects of hotels, office buildings, restaurants, wellness centres or manufacturing plants and warehouses.

iNELS is fully compatible with BMS (Building Management System) Niagara platform, which provides a convenient and efficient user interface for all - investors, management, users, operators and system integrators. iNELS Niagara enables the integration of dozens of iNELS central units and all other protocols that are installed within buildings. There are controllers for the actual control of all processes in the building. Supervisor licenses for the deployment on the operator's computer are used to supervise the operation of the system, receiving alarms and notifications and evaluation of historical data and graphs. Thanks to its wide range of possible operating pre-sets, iNELS Niagara allows to achieve the most economical operation of the building. User interface uses a very efficient modern design language and using of templates greatly reduces the required integration time.



CORE FEATURES:



A wide range of logical function blocks

iNELS Niagara offers integrators dozens of function blocks for solving a variety of tasks within the building management. Function blocks are also divided into clear categories for easy navigation.

Management of alarms and notifications

Sophisticated alarm and notification management including the ability to send information via e-mail. Alarms can be backed up and user notes can be inserted to the individual alarms, for example on how to resolve the situation.

Supports virtually all universal protocols

iNELS Niagara is really versatile and supports dozens of universal and proprietary protocols, all the data points converted to a universal form, allowing truly free integration between all protocols.

Energy analysis

Energy management and cost analysis is the most important part of building management and iNELS Niagara offers tremendous opportunities for monitoring and evaluation of the parameters that are energy related.

Support for HTML5

By leveraging HTML5 iNELS Niagara offers a simple interface that eliminates the need to install various plugins. A unified user interface is available for all platforms - PC, tablet or mobile phone.

Archive logs and historical data

All historical data and logs can be stored at freely selectable intervals. The big advantage of iNELS Niagara is that it allows all alarms, logs, visualization, calendars and configuration to be done by remote using a standard Web browser.

Advanced visualization

Part of iNELS Niagara is an extensive graphics library for creating modern and well-arranged visualizations depicting the current state of the controlled technology.

Encrypted communication

Authentication requires the use of very strong credentials and all data communication is encrypted and this area is with the advent of the Internet of things (IoT) is given maximum attention.

Creating graphs / trends

Part of the visualizations is graphs that enable easy insertion of the monitored data to a chart by using "drag and drop" allowing more transparent comparison of values and storing graphs for later use.

Wide range of access for rights management

The big advantage of this solution is the iNELS Niagara control access based on user roles, which enables users to perform only the well-defined actions given. All changes and events are also logged and stored for possible evaluation.

Customizable dashboards

Within the visualizations, dashboards are widely supported, which can also be accessed with dependant on the user rights and users are able to adapt these dashboards, e.g. monitored variables, according to their requirements. Each user can inspect the operation of buildings from different view and iNELS Niagara freely enables effective adaptation.

Efficient navigation through the use of tags

Utilising tags streamlines the entire process, from configuration to management of the whole system. Using tags in combination with templates can significantly reduce configuration time; tags facilitate access control based on user rights, navigation in the whole project and user customization in the visualization.



BMS
Building management system


powered by
niagara
framework®



OBIX

OPC

XML

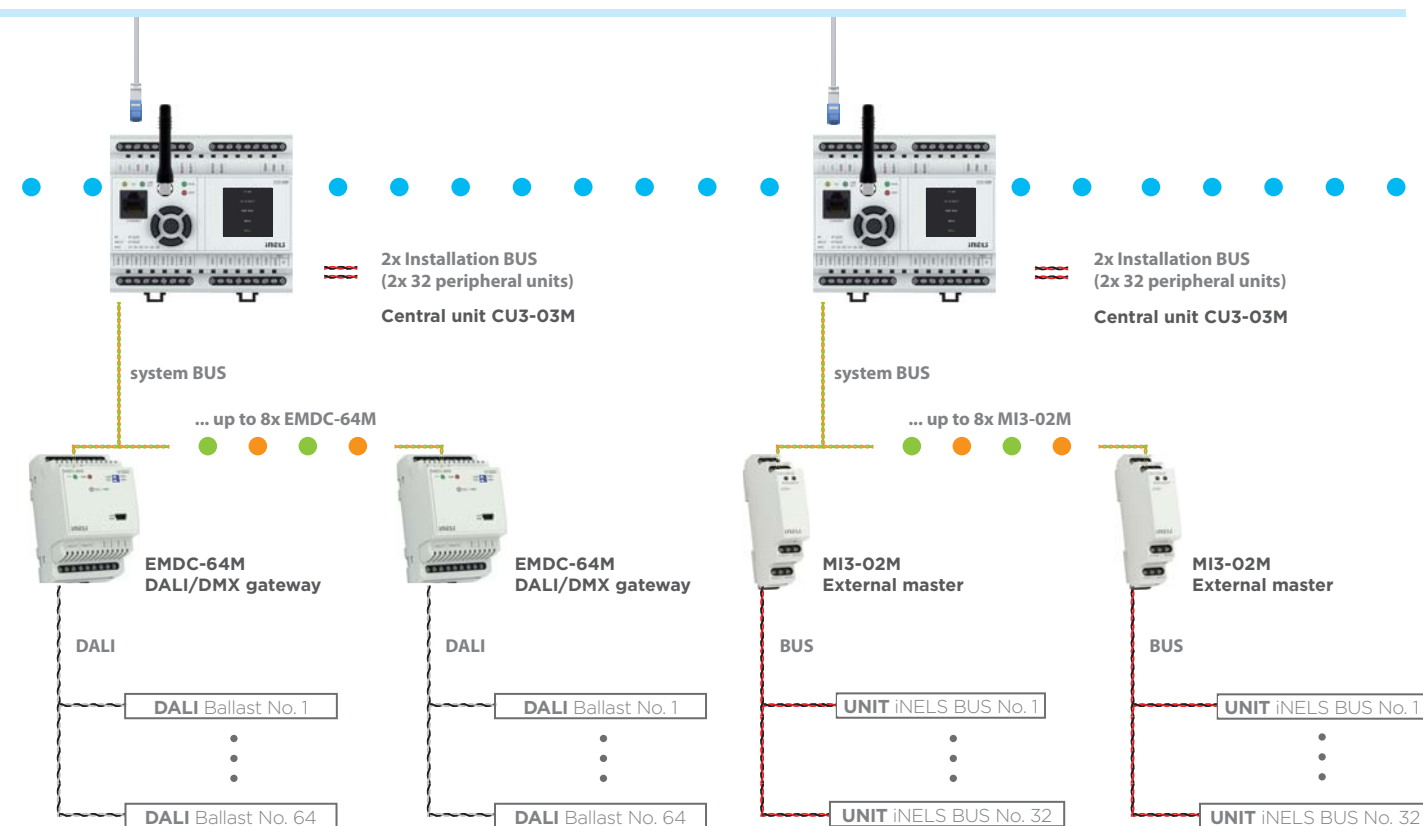

AVAILABLE PROTOCOLS: *



* A complete list can be found on www.inels.cz.

Multimedia

Modern solutions for house and building projects.



www.inels.com

iNELS®



EAN code
iTP 10"/A: 8595188135382
iTP 10"/FO: 8595188135412

Technical parameters		iTP 10"
Display		
Type:		color TFT LCD
Resolution:		1280 x 800 dots / 16.7 M
Aspect ratio:		16:10
Visible area:		217 x 135 mm
Backlight:		Active (white LEDs)
Touch screen:		Capacitive
Diagonal:		10.1"
Control:		touch
Viewing Angle:		± 85 °
Power supply		
Supply voltage:		PoE IEEE 802.3af (Active PoE)
Power consumption:		max. 12 W
HW		
CPU:		A20 ARM Cortex-A7 DUAL-CORE
RAM:		1GB DDR3 SDRAM
SD card:		Android / booking system (Future office)
Network:		LAN: 10/100
AUDIO:		Microphone, speakers
Connections:		PoE power connector - RJ45
Operating conditions		
Operating temperature:		0 .. +50 °C
Storing temperature:		- 20 .. +70 °C
Protection degree:		IP20
Overvoltage category:		III.
Pollution degree:		2
Operation position:		any
Installation:		Into the pre-prepared opening anywhere in the interior (245 x 160 x 30 mm) / with the appropriate installation frame as well as the glass
Dimensions:		325 x 174 x 35 mm
Weight:		1226 g

- 10" touch panel designed to control iNELS.
- Black aluminum frame chassis in combination with glass.
- Integrated speakers and microphone are primarily designed for intercom operation.
- Connection to the local area network can be done with Ethernet connection with PoE power supply - Active Poe (IEEE 802.3af).
- Android for iHC (iNELS Home Control) applications or Future office applications.
- Update applications over the Internet.
- Active PoE power.
- The panel also includes a cover that also serves as a mounting frame.



EAN code
Connection Server: 8595188149204


Technical parameters	Connection Server
Connection:	MicroUSB 5V / MicroUSB 5V/2A
Video Output:	HDMI
Audio Output:	3.5 mm stereo JACK out
Processor (CPU):	1.2 GHz, 64-bit quard-core, ARM Cortex-A 53
Memory (SDRAM):	1 Gb
Communication Interface:	ethernet port 10/100 Mbps (RJ45)
Connecting peripherals:	4x USB 2.0
Dimensions:	90 x 70 x 25 mm

- The connection server is providing a communication environment between iNELS BUS System with the third party devices, for which their protocols are also translated and submitted.
- The iHC application's environment enables us to control all these technologies from just one app.
- The inclusion Connection Server to the system can be controlled from the application iHC except BUS units (lighting, blinds, heating, etc.) also IP cameras, air conditioning, recuperation or domestic appliances Miele.
- It also allows the communication with the domestic voice intercom 2N. It can also arrange the information from the weather station Giom or data from energy meters (electricity, water, gas), which is visualized in clear graphs.
- The device connection server uses the Raspberry Pi hardware and the apps requires a license relative to the MAC address of the device.
- While connecting with the devices connection server, it's recommended to use an uninterruptible power supply (UPS), which ensures that, there will be no power outage.
- As a part of the package, we also included an SD card where we previously installed Linux OS on it and its needed software equipment.
- The configuratun is happening on its own web interface, where the default IP address is not fixed. (The IP address is assigned from the DHCP server and it's needed to be known when we're connected to the network).

These protocols are being translated:

- XML RPC (for communication with iHC applications, Connection Server controls access to the central unit of iHC applications and allows access to it from multiple devices).
- ELKONET (for communication with the iNELS central unit).
- Miele@home 2.0 (for the communication with Miele Gateway and the domestic needs).
- VAPIX2, VAPIX3, ONVIF for cameras (which enables streaming up to 9 camera pictures together, PTZ controlling, recording on a network drive).
- Coolmaster (for communication with AC Daikin VRV, Sanyo VRF, Toshiba VRF, Mitsubishi Electric VRF, LG VRF, Fujitsu VRF, Mitsubishi Heavy VRF, Hitachi VRF).
- Atrea, AirPohoda (recuperation).
- NILAN (indoor climate solutions).
- SIP for domestic voice communication, for example: 2N (a communication between the iHC app or between individual iHC apps - VoIP).
- Giom3000 (displaying values from the weather station in the iHC app and using the information about the temperature, humidity and wind speed to an subsequent event, for example removing the shutters).

Infrastructure example

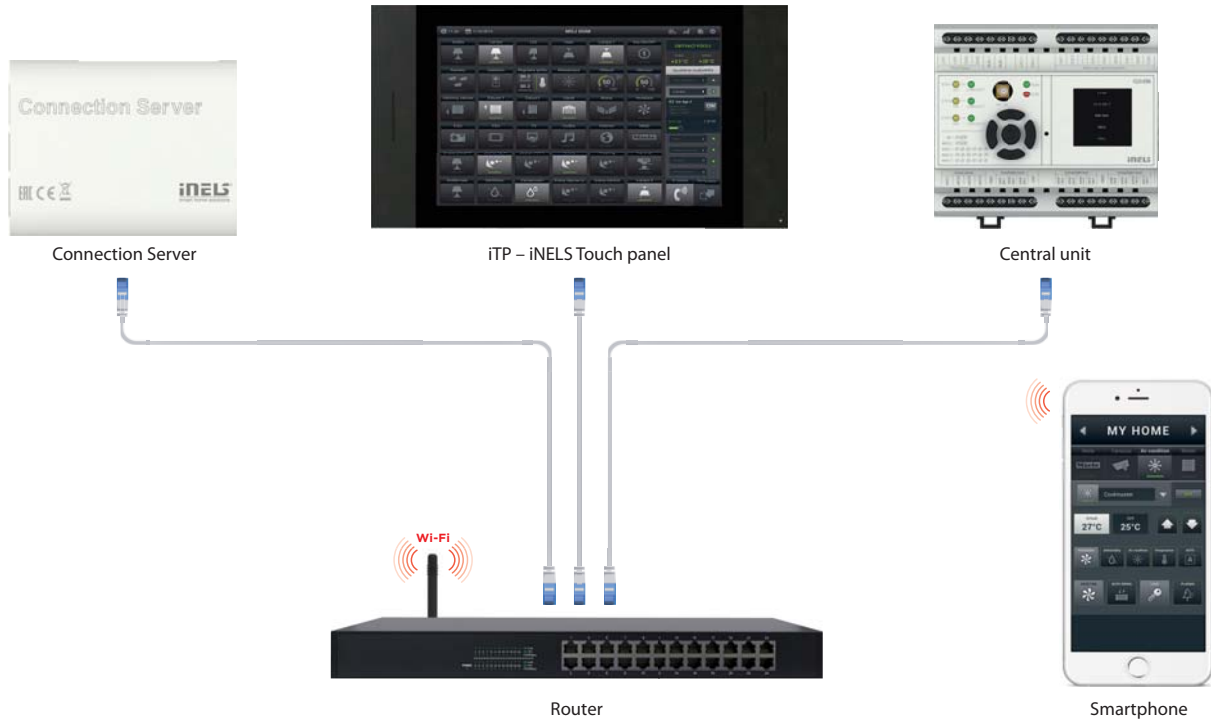





EAN code
eLAN-IR-003: 8595188132831

Technical parameters		eLAN-IR-003
Sensor IR - learning mode		
Senzor IR:	Infrared sensor for learning IR codes	
The carrier IR frequency:	20 - 455 kHz	
Learning distance:	till 1m	
Outputs		
Output:	3x IR transmitter	
Connection:	3x 3.5 Jack connector, cable length 3 m	
Output indication:	3x LED green status IR1-IR3	
Range:	Up to 1m from the device	
Ethernet communication		
Indication of ETH operating status:	Green LED	
Indic. of ETH communication:	Yellow LED	
Communication Interface:	10/100 Mbps (RJ45)	
Default IP address:	192.168.1.1	
Power supply		
Voltage supply / jm. current:	10-27 V DC / 200 mA (safe low voltage)	
Connection:	Jack connector Ø 2.1 mm	
Voltage supply indication:	Green LED	
Other data		
Other possibilities of wiring:	USB-B connector	
Indication:	Yellow USB LED status	
Reset button:	settings to their default values	
Power supply:	230 VAC / 12 V DC supplied with the data logger	
Operating conditions		
Operating temperature:	-20 .. +55 °C	
Storage temperature:	-25 .. +70 °C	
Protection degree:	IP30	
Pollution degree:	2	
Operation position:	arbitrary	
Installation:	free	
Design:	design box	
Dimensions and weight		
Dimensions:	90 x 52 x 65 mm	
Weight:	136 g	

- The applications iHC-MAIR and iHC-MIIR provide universal control for all Audio/Video devices (including air conditioning).
- The application is connected via smart phone connected to the smart IR box eLAN-IR-003, which communicates with Audio/Video devices via IR sensor.
- The intuitive application environment makes it simple for anyone to control.
- What all can you control? home theater, TV, DVD or Blue Ray player, amplifier, set-top box, satellite receiver, air-conditioning, projector and more...
- It can control up to 100 arbitrary commands with various controllers that you normally have at home.
- The scenes function, where, you perform multiple functions simultaneously by a single command (e.g. you are going to bed you and switch off all AV appliances in the entire home with a single press).
- It is possible to integrate into a single application an unlimited number of IR boxes, meaning that in one application, you have control over the living room, children's rooms, etc.
- It is also possible to control remotely from anywhere using a Wi-Fi network (e.g. from work or vacation).
- Thanks to auto-IP acquisition from the DHCP server, you need not set up a network (if you have no set fixed IP address).
- You can connect three sensors to the smart IR box eLAN-IR-003 for three directions of control.

Example of connection

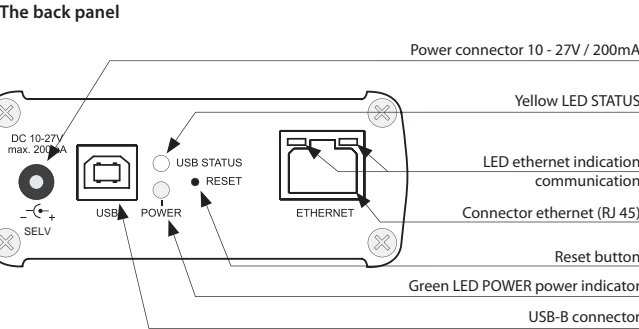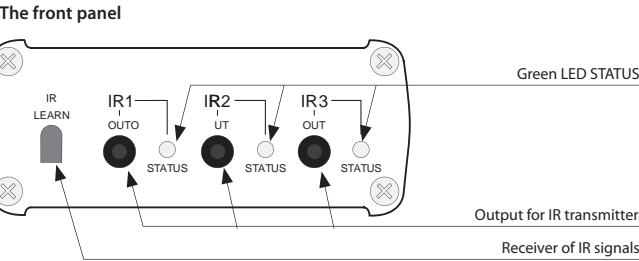

Controller options menu in the application







EAN code
eLAN-RS485/232: 8595188170260

Technical parameters		eLAN-RS485/232
Interface Ethernet		
ETH operating status indicator:	green LED	
ETH communication indicator:	yellow LED	
Communications interface:	100 Mbps (RJ45)	
IP address support:	static, DHCP client	
Factory setting:	DHCP client	
Interface RS485		
Broadcast indication:	red LED	
Connector:	PUSH IN max 1.5 mm ²	
Bus termination on the eLAN-RS side:	120 Ω resistor (implemented inside the eLAN-RS485/232)	
Range:	up to 1 km (depending on cable used and communication speed)	
Communication speed:	adjustable, max. 230.4 Kbps	
Max. connection:	32 devices	
Communication:	half-duplex transmission	
Type of communication:	MODBUS - RTU, EZS Jablotron, Air Pohoda	
Parity setting:	none, odd, even	
Length:	5 / 6 / 7 / 8 bit	
Stop bit:	1/2	
Interface RS232		
Broadcast indication:	red LED	
Connector:	PUSH IN max 1.5 mm ²	
Bus termination on the eLAN-RS side:	120 Ω resistor (implemented inside the eLAN-RS485/232)	
Communication speed:	adjustable, max. 230.4 Kbps	
Max. connection:	32 devices	
Communication:	half-duplex transmission	
Type of communication:	MODBUS - RTU, EZS Jablotron, Air Pohoda	
Parity setting:	none, odd, even	
Length:	5 / 6 / 7 / 8 bit	
Stop bit:	1/2	
Power supply		
Indication:	Yellow LED STATUS	
Supply voltage/current:	10-27 V DC / 200 mA SELV	
Power:	adapter with connector Jack Ø 2.1 mm (part of supply) Passive PoE or connector USB-B	
Supply voltage indication:	Green LED POWER	
Button RESET:	To factory settings	
Power source:	230 V AC / 12 V DC supplied with the data logger	
Operating conditions		
Operating temperature:	-20 .. +55 °C	
Storage temperature:	-25 .. +70 °C	
Protection degree:	IP 20	
Pollution degree:	2	
Operation position:	arbitrary	
Installation:	free	
Design:	design box	
Dimensions and weight		
Dimensions:	90 x 52 x 65 mm	
Weight:	110 g	

- The eLAN-RS485/232 is used to communicate with devices communicating via the Modbus RTU protocol, with the converter acting as a master unit.
- eLAN-RS485/232 is equipped with a web interface to configure the connected devices.
- Thanks to the web interface, the eLAN-RS485 / 232 can be used as a stand-alone device.
- eLAN-RS485/232 is integrated into the Connection Server, which makes it possible to control the connected technology through iNELS Home Control (iHC). Thus, it is possible to control, for example, ventilation systems and heat recovery from NILAN.
- The eLAN-RS485/232 is equipped with A, B and GND terminals for connection to the RS485 serial line on the back panel, as well as a signalling diode to indicate the reception status.
- The front panel features an RJ45 connector to connect to the Ethernet via a network cable.
- The power supply of the eLAN-RS485/232 is possible via a 10-27V DC adapter (adapter included) or through a 24V DC PoE, e.g. directly from a switch or PoE injector.
- The eLAN-RS485/232 requires the RS485 serial interface to be connected in line and to comply with all policy and installation requirements of this interface.

Example of connection

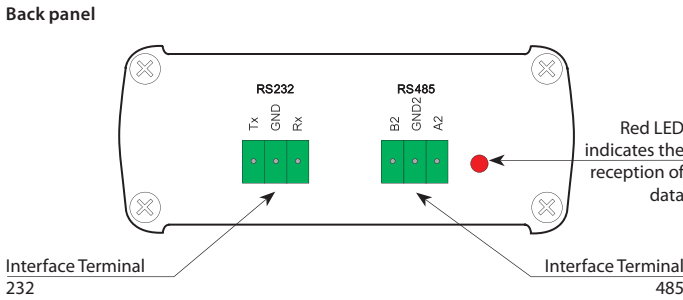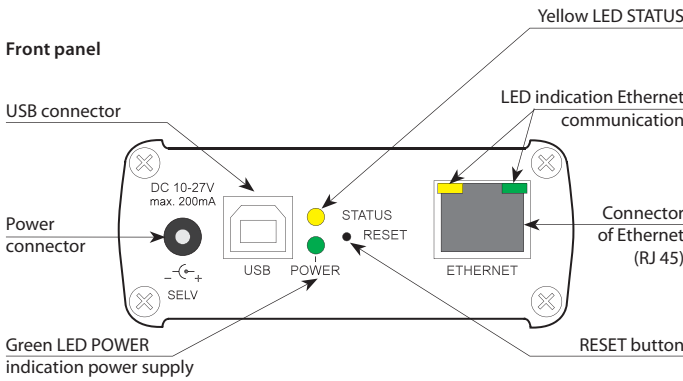

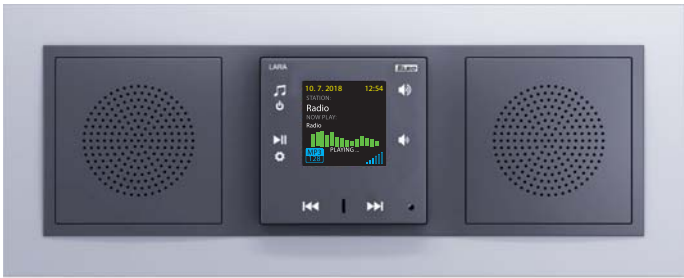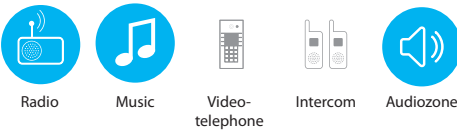


Technical parameters		LARA Radio
Internet Radio		
Supported data transfer formats:		mp3, ogg, acc
Control / Settings		
Front panel:		touchscreen buttons
Communication Ethernet:		via PC setting up and communicating SW LARA Configurator
Button RESET:		restart product / reset product to factory settings
Interface ethernet		
Communications interface:		10/100 Mbps
Connector:		RJ45
Max. cable length UTP with power:		50 m
Display		
Type:		color OLED
Resolution:		128 x 128 pixels
Visible surface:		26 x 26 mm
Power supply		
Supply:		POE 24 V DC/1.25 A
Min. input:		1.4 W
Max. input:		26 W (peak at maximum playback performance)
Amplifier		
Amplifier:		stereophonic class D with digital output control
Max. amplifier output:		2 x10 W/8 Ω
Inputs / Outputs		
Microphone:		NO
Audio input:		3.5 stereo jack
Audio output 1:		terminals LINE OUT (used for external amplifier)*
Audio output 2:		terminals OUT L/OUT R (speaker output from int. amplifier)
Connection		
Terminal block:		0.5 - 1 mm ²
Other data		
Working temperature:		0 .. + 55 °C
Protection degree:		IP20
Overvoltage category:		II.
Pollution degree:		2
Installation:		in an installation box
Dimensions and weight		
Dimensions:		
- plastic:		85 x 85 x 46 mm
- metal, glass, wood, granite:		94 x 94 x 46 mm
Weight:		209 g (plastic frame)

* The cable from the LINE OUT terminals must be shielded, max. length should not exceed 5 m.

- A music and Internet radio player - all in the dimension of a switch and a luxurious LOGUS⁹⁰ design.
- LARA Radio - when connected to the Internet, it can play streaming radio stations and you can store up to 40 of them. But you can also select from thousands of radio stations from across the globe, which provide data for correct connection.
- LARA Radio can play content from an external music source, which can be an smart phone or e.g. an MP3 player. These devices are connected to a 3.5mm stereo jack audio input, located underneath the front panel.
- LARA Radio can also play audio files from central data storage, onto which Logitech Media Server is installed. This LARA function can therefore be used within the complex iNELS system or as an entirely independent home automation device. When used within iNELS, control is a part of the complex application iHC. If using with NAS data storage, the application LARA NAS App is available.
- Touch control is performed on the device front panel (six capacity buttons available), or LARA Dio.
- The basic device settings (network connection, language, audio input) are performed via the display and a simple menu controlled from capacity buttons on the device front cover. Further settings (selection of stations, connection with the server, updating firmware, etc.) are configured via computer and the software LARA Configurator.
- LARA Radio is equipped with an OLED colored display with the size of 1.5". The display also shows basic information about playing music, which also serves the orientation in the menu settings, etc.
- LARA Radio has an integrated amplifier with 2x 10 W output, thus greatly facilitating device installation in places where such output suffices. LARA is used e.g. to provide premium sound to the kitchen, bathrooms, waiting rooms, offices, reception desks, entrance halls, operating rooms or wellness facilities.
- LARA is powered by PoE with maximum voltage level 27 V DC / 1000 mA. So connecting and communicating with just one cable (UTP) is a major advantage.
- For LARA, an entire series of accessories is ready for connection (PoE adapters, PoE switches), speakers (in a frame, walls or ceilings) and installation (cables, box, etc.).
- Complies with standards IEEE 802.3u (100BASE-Tx).
- Automatic cable crossing detection of Ethernet cable - MDIX.

EAN code	
LARA Radio white:	8595188148719
LARA Radio ivory:	8595188149242
LARA Radio ice:	8595188149228
LARA Radio pearl:	8595188149259
LARA Radio aluminium:	8595188149211
LARA Radio grey:	8595188149235

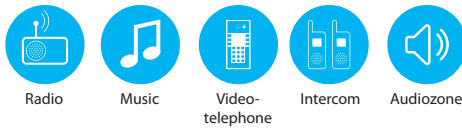

Technical parameters		LARA Intercom
Internet Radio		
Supported data transfer formats:		mp3, ogg, acc
Control / Settings		
Front panel:		touchscreen buttons
Communication Ethernet:		via PC setting up and communicating SW LARA Configurator
Button RESET:		restart product / reset product to factory settings
Interface ethernet		
Communications interface:		10/100 Mbps
Connector:		RJ45
Max. cable length UTP with power:		50 m
Display		
Type:		color OLED
Resolution:		128 x 128 pixels
Visible surface:		26 x 26 mm
Power supply		
Supply:		POE 24 V DC/1.25 A
Min. input:		1.4 W
Max. input:		26 W (peak at maximum playback performance)
Amplifier		
Amplifier:		stereophonic class D with digital output control
Max. amplifier output:		2 x10 W/8 Ω
Inputs / Outputs		
Microphone:		YES
Audio input:		3.5 stereo jack
Audio output 1:		terminals LINE OUT (used for external amplifier)*
Audio output 2:		terminals OUT L/OUT R (speaker output from int. amplifier)
Connection		
Terminal block:		0.5 - 1 mm ²
Other data		
Working temperature:		0 .. + 55 °C
Protection degree:		IP20
Overvoltage category:		II.
Pollution degree:		2
Installation:		in an installation box
Dimensions and weight		
Dimensions:		
- plastic:		85 x 85 x 46 mm
- metal, glass, wood, granite:		94 x 94 x 46 mm
Weight:		209 g (plastic frame)

* The cable from the LINE OUT terminals must be shielded, max. length should not exceed 5 m.

- LARA Intercom offers users 5 different functions and expands even more options to Lara Radio - music players and internet radio stations within the range of LOGUS⁹⁰ switch designs.
- LARA Intercom provides an extra functionality and videophone intercom.
- Thanks to videophone function, now it is possible to have a voice communication between LARA and the sound of the door (IP Intercom), so with someone visiting and standing in front of the house, we can see that on LARA display as part of this function which increases the security feeling and safety besides of course, the comfort for the user.
- LARA Intercom is equipped with an OLED colored display with the size of 1.5", which is used to transfer images and sounds from the door camera properly. The display also shows basic information about playing music, which also serves the orientation in the menu settings, etc.
- The intercom function can also be used for communications between all the family members throughout the whole house, thanks to two way voice communications possibilities between different LARA units.
- LARA Intercom continues to offer three functions that are also supported by LARA Radio - when connected to the Internet, it can play streaming radio stations and you can store up to 40 of them. But you can also select from thousands of radio stations from across the globe, which provide data for correct connection.
- LARA Intercom can play content from an external music source, which can be an smart phone or e.g. an MP3 player. These devices are connected to a 3.5mm stereo jack audio input, located underneath the front panel.
- LARA Intercom can also play audio files from central data storage, onto which Logitech Media Server is installed. This LARA function can therefore be used within the complex iNELS system or as an entirely independent home automation device. When used within iNELS, control is a part of the complex application iHC. If using with NAS data storage, the application LARA NAS App is available.
- Touch control is performed on the device front panel (six capacity buttons available), or LARA Dio.
- The basic device settings (network connection, language, audio input) are performed via the display and a simple menu controlled from capacity buttons on the device front cover. Further settings (selection of stations, connection with the server, updating firmware, etc.) are configured via computer and the software LARA Configurator.
- LARA Intercom has an integrated amplifier with 2x 10 W output, thus greatly facilitating device installation in places where such output suffices. LARA is used e.g. to provide premium sound to the kitchen, bathrooms, waiting rooms, offices, reception desks, entrance halls, operating rooms or wellness facilities.
- LARA is powered by PoE with maximum voltage level 27 V DC / 1000 mA. So connecting and communicating with just one cable (UTP) is a major advantage.
- For LARA, an entire series of accessories is ready for connection (PoE adapters, PoE switches), speakers (in a frame, walls or ceilings) and installation (cables, box, etc.).
- Complies with standards IEEE 802.3u (100BASE-Tx).
- Automatic cable crossing detection of Ethernet cable - MDIX.


EAN code	
LARA Intercom white:	8595188149389
LARA Intercom ivory:	8595188149419
LARA Intercom ice:	8595188149396
LARA Intercom pearl:	8595188149426
LARA Intercom aluminium:	8595188149372
LARA Intercom grey:	8595188149402

Touchscreen operation

Source Selection - Radio, AUX, Audio zone
Power ON / OFF

Choice - PLAY / PAUSE
Enter the menu

Change radio / songs, move the menu
Intercom Version:
Short push on call - call termination






Volume control


Volume control


Change radio / songs, move the menu
Intercom Version:
Long press - access to contact list
Long press on the call list, initiate contact
Short push on call - open el. door lock









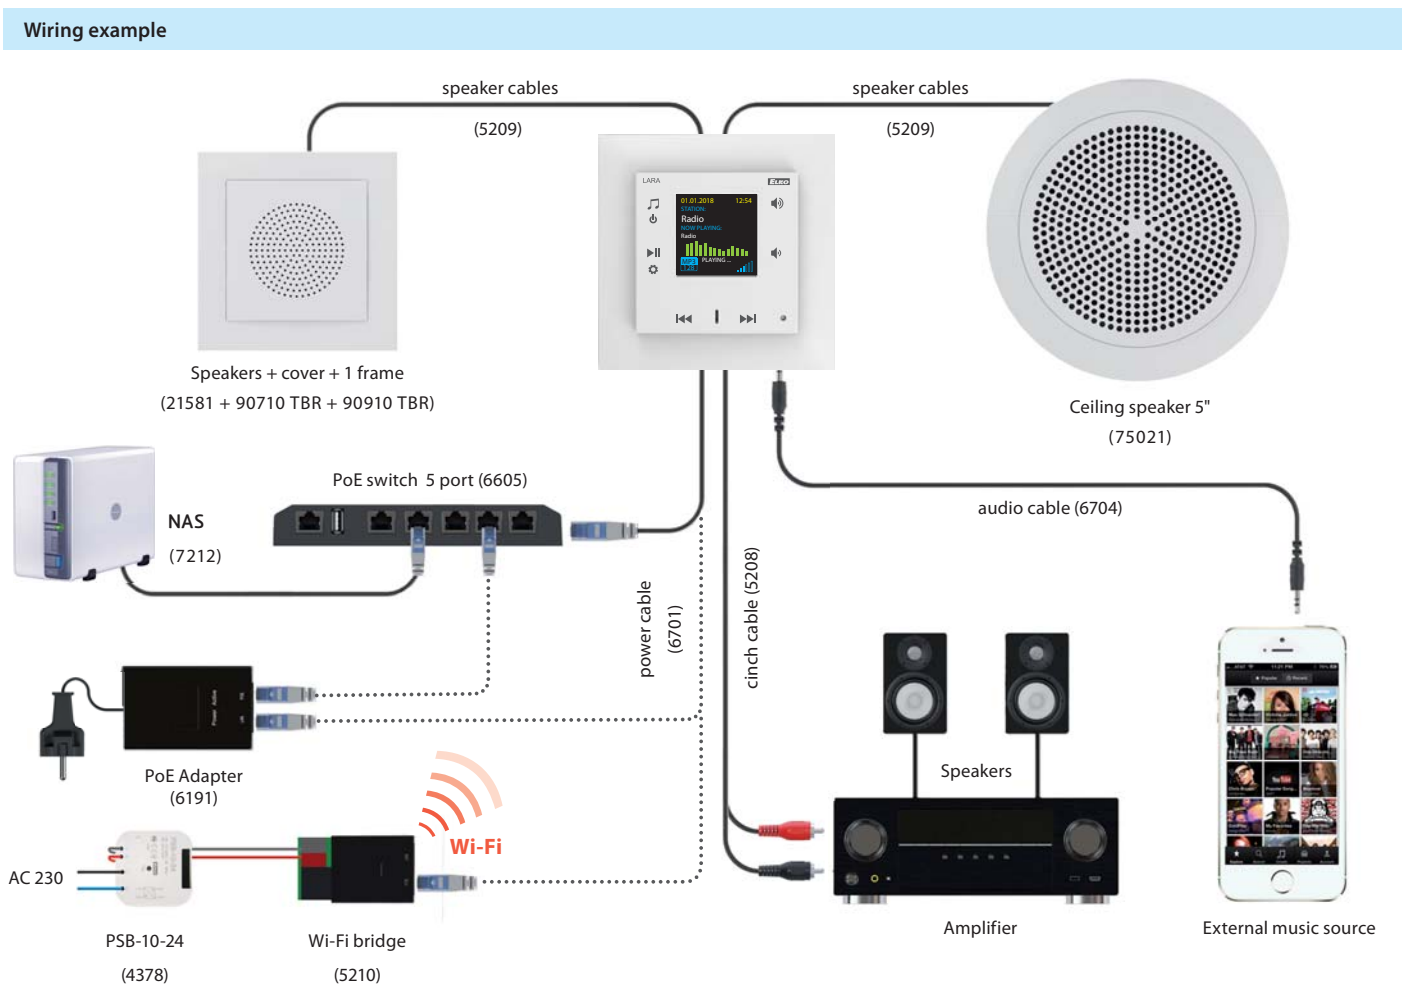

















Applications control



Operations, using the application for, LARA Dio and iNELS Home Control for Android and iOS smartphones and tablets.







Speakers and cables	order code	Installation material	order code
 AUX CABLE LARA (LARA CINCH CABLE) Used to connect LARA with exter. amplifier. Reduction 4pin from LARA LINE OUT to 2x CINCH plug into amplifier, length 2 x 20 cm.	5208	 1-FRAME	90910 TBR
 POWER SUPPLY (PSB-10-24) Switching stabilized power supplies with fixed output voltage, intended for mounting into an installation box (e.g. KU-68). PSB-10-24 - stabilized power supply 24V/10 W.	4378	 2-FRAME	90920 TBR
 AUX CABLE LARA (LARA AUDIO CABLE) Used to connect LARA with external music source (smart phone mp3 player). The length is 20cm terminated with 2x stereo jack 3.5mm.	6704	 3-FRAME	90930 TBR
 CEILING SPEAKER Speaker is suitable for the installation in suspended ceilings and hollow walls. Mounting hole diameter 143 mm, Power 8W, 32Ω speaker impedance.	75021 CBR	 4-FRAME	90940 TBR
 SURFACE SPEAKER Two-way speaker intended for mounting in a ceiling or on the walls: Power 15W, 32 Ω speaker impedance, dimensions 270x183x37 mm. Color: White	75106 CBR	 5-FRAME	90950 TBR
 NAS EXTERNAL STORAGE Two-chamber NAS server with the function of hosting, sharing and data security.	7212	 SURFACE MOUNT BOX	10976 ABR
 NETWORK CABLE, 0.2 m Flat white LAN cable CAT5, length 20 cm, terminated with 2x RJ45 plugs.	6702	 INSTALLATION BOX 1 GANG (KP 67/2)	6705
 NETWORK CABLE, 1 m Flat white LAN cable CAT5, length 1 m, terminated with 2x RJ45 plugs.	6700	 INSTALLATION BOX 2 GANG (KP 64/2)	6706
		 INSTALLATION BOX 3 GANG (KP 64/3)	6707
		 INSTALLATION BOX 4 GANG (KP 64/4)	6708
		 INSTALLATION BOX 5 GANG (KP 64/5)	6709
		 INSTALLATION BOX 1 GANG (KP 64/LD)	6710
		 INSTALLATION BOX 2 GANG (KP 64/2L)	6711
		 INSTALLATION BOX 3 GANG (KP 64/3L)	6712
		 INSTALLATION BOX 4 GANG (KP 64/4L)	6713
		 INSTALLATION BOX 5 GANG (KP 64/5L)	6714
		 UNIVERSAL BOX 1068-02	6716
		 UNIVERSAL BOX KUH 1/L NA	6717

Power sets		2N Helios IP Verso
 POWER SUPPLY PoE + WiFi INTO OR THE BOX WiFi bridge with PoE and power supply into an installation box. Power supply 230V.	5224	
 POWER SUPPLY PoE INTO A BOX PoE injector with power supply intended for an installation box. Power supply 230 V.	5226	
 PoE SUPPLY Power injector with plug-in adapter 230V.	5225	
 POWER SUPPLY PoE + WiFi WiFi bridge with PoE plug in adapter 230 V.	5227	

Applications for system control for your tablet or smartphone

Development of smartphones and tablets and development of applications for these devices go together. You can control your electro-installation through the applications in your iPhone, iPad, Smartphone or tablet with the Android operating system. As opposed to our competitors, we provide you a solution assuring you that your household appliances can be controlled through just one application. You will find here whatever you need – it provides you full managing, monitoring and checking of your house. You can control not only lighting or heating, but also it enables you to switch the TV programs, play music and control air conditioning. iHC is an acronym of iNELS Home Control and letters after the hyphen means devices (T= tablet, M= mobile / smartphone) and operating system (Android = A, I = iOS / Apple). They are FREE for download at the AppStore and GooglePlay (Play Store).

You can also try out our PROMO application, in which in real time, you control our showrooms in Prague, Nitra or Holešov.



APPS FOR ALL... iNELS Home Control

iNELS BUS System (bus electro installation)						iNELS RF Control (wireless electro installation)			
Android		iOS		TIZEN®		Android	iOS	TIZEN®	TIZEN®
Tablet	Phone	iPad	iPhone	Samsung Hospitality TV		iPhone	iPhone	Smart TV	Smartwatch
iHC-TA	iHC-MA	iHC-TI	iHC-MI	iSHC		iHC-MAIRF	iHC-MIRF	iSHC	iHC-WTRF
BUS & RF	Lighting	✓	✓	✓	✓	✓	✓	✓	✓
	Blinds	✓	✓	✓	✓	✓	✓	✓	✓
	Socket	✓	✓	✓	✓	✓	✓	✓	✓
	Garage doors, gates	✓	✓	✓	✓	✓	✓	✓	✓
	RGB bulbs, LED strips	✓	✓	✓	✓	✓	✓	✓	✓
	Scenes	✓	✓	✓	✓	✓	✓	✓	✓
	Heating	✓	✓	✓	✓	✓	✓	✓	✓
Third Parties Integration	Cameras	✓	✓	✓	✓	✓	✓	✓	✗
	Air-conditioning	✓	✓	✓	✓	✓	✓	✗	✗
	Recuperation	✓	✓	✓	✓	✗	✗	✗	✗
	Home appliances (MIELE)	✓	✓	✓	✓	✗	✗	✗	✗
	Weather station	✓	✓	✓	✓	✓	✓	✗	✗
	Measurement and visualization of energy	✓	✓	✓	✓	✓	✓	✓	✗
	Door communicator and Intercom	✓	✓	✓	✓	✓	✓	✓	✗
	A/V appliances	✓	✓	✓	✓	✓	✓	✗	✗

✓ Supported ✗ Not supported

iNELS Home Control applications are FREE to download at or and are supported by Android OS 4.2 or later and iOS8 or later.




EAN code
TELVA 230V, NC: 8595188166010
TELVA 230V, NO: 8595188166027
TELVA 24V, NC: 8595188166034
TELVA 24V, NO: 8595188166041

Technical parameters	TELVA 230V	TELVA 24V
Operating voltage:	230V, 50/60 Hz	24V, 50/60 Hz
Switching current max:	300 mA for max. 2 min	250 mA on max. 2 min
Operating current:	8 mA	75 mA
Closing / opening time:	dtto 3 min.	dtto 3 min.
Power input:	1.8 W	1.8 W
Protection:	IP 54/II	IP 54/II
Settings:	4 mm	4 mm
Stopping force:	100 N ±5 %	100 N ±5 %
Cable length:	1 m	1 m
Connecting wire:	2 x 0.75 mm²	2 x 0.75 mm²
Media temperature:	0 to +100 °C	0 to +100 °C
Color:	white RAL 9003	white RAL 9003
Dimensions h/w/d:	55+5 x 44 x 61 mm	55+5 x 44 x 61 mm

- The thermo-regulation drive TELVA is used to control underfloor and radiator hot-water heating.
- It is known for its quiet operation. It has a built-in valve position indicator.
- By mounting using the VA valve adapter, the thermo-regulation drive TELVA is applicable for a wide range of thermostatic valves available on the market.
- Design:
 - without voltage open (NO)
 - without voltage closed (NC)
- Types:
 - TELVA 230V, NO
 - TELVA 230V, NC
 - TELVA 24V, NO
 - TELVA 24V, NC
- Type of use:
Switching units of the series SA3 are used within the BUS system iNELS BUS to control TELVA thermodrives.

It is generally supplied with a valve adapter VA-80 in low design with bar M30 x 1.5 (white-gray), which may not be compatible with all types of valves.


AN-I | Internal antenna

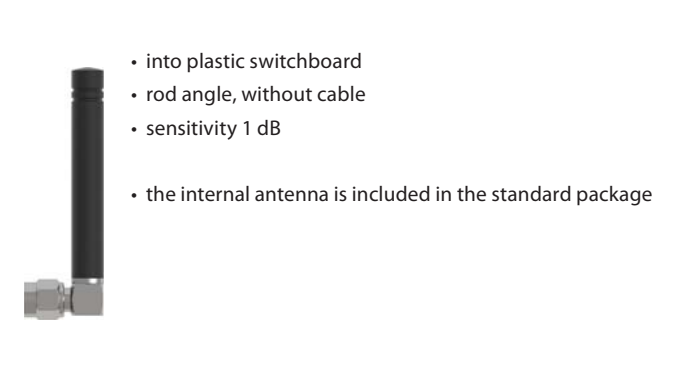

- into plastic switchboard
- rod angle, without cable
- sensitivity 1 dB
- the internal antenna is included in the standard package

EAN code
Internal antenna AN-I: 8595188161862

AN-E | External antenna

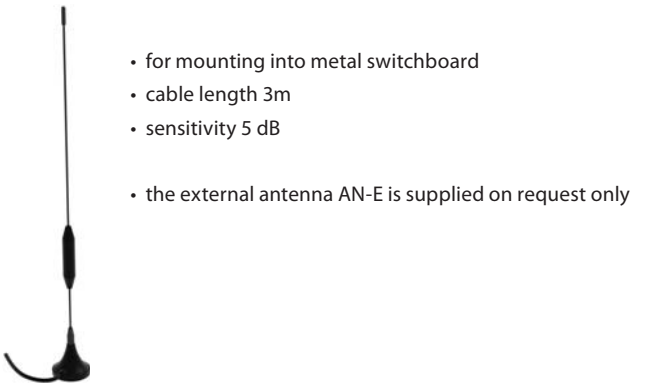

- for mounting into metal switchboard
- cable length 3m
- sensitivity 5 dB
- the external antenna AN-E is supplied on request only

EAN code
External antenna AN-E: 8595188190121

TC, TZ, Pt100 | Thermo sensors



EAN code
TC-0: 8595188110075 TZ-0: 8595188140591 Pt100-3: 8595188136136
TC-3: 8595188110617 TZ-3: 8595188110600 Pt100-6: 8595188136143
TC-6: 8595188110082 TZ-6: 8595188110594 Pt100-12: 8595188136150
TC-12: 8595188110099 TZ-12: 8595188110587

Technical parameters	TC	TZ	Pt100
Range:	-20 °C to +70 °C	-40°C to +125°C	-30°C to +200°C
Scanning element:	NTC 12K 5 %	NTC 12K 5 %	Pt100
In air/ in water:	(τ0.5) ≤ 18 s	(τ65) 62 s / 8 s	(τ0.5) - / 7 s
In air/ in water:	(τ0.9) ≤ 48 s	(τ95) 216 s / 23 s	(τ0.9) - / 19 s
Cable material:	PVC unshielded, 2x 0.25 mm²	Silicone	Silicone
Terminal material:	polyamid	Nickel plated copper	Copper
Protection degree:	IP67	IP 67	IP 67
Insulation:	-	-	double insulation silicone

Types of temperature sensors:	TC-0	TZ-0	-
- length:	100 mm	110 mm	-
- weight:	5 g	4.5 g	-
- length:	3 m	3	3 m
- weight:	70 g	106 g	68 g
- length:	6 m	6 m	6 m
- weight:	130 g	216 g	149 g
- length:	12 m	12 m	12 m
- weight:	250 g	418 g	249 g

τ65 (95): time, which sensor needs to heat up on 65 (95) % of ambient temperature of environment, in which is located.


- Thermister temperature sensors are made of Negative Temperature Coefficient (NTC) embedded in a PVC or metal sleeve with a thermally-conductive sealer.
- **Sensor TC**
 - lead-in cable to sensor TC is made of wire CYSY 2D x 0.5 mm/ 0.02”.
- **Sensor TZ**
 - cable VO3SS-F 2D x 0.5 mm /0.02” with silicone insulation for use in high temperature applications.
 - silicone insulation for use in high temperature applications.
- **Sensor Pt100**
 - shielded silicon 2x 0.22 mm² (AWG 21), shielding connected with a case.
- temperature sensors can be connected directly to the terminal block
- cable lengths can not be changed, connected or modified.

Resistive values of sensors in dependance on temperature

Temperature (°C)	Sensor NTC (kΩ)	Sensor Pt100 (Ω)
20	14.7	107.8
30	9.8	111.7
40	6.6	115.5
50	4.6	119.4
60	3.2	123.2
70	2.3	127.1


Tolerance of sensor NTC 12 kΩ is ± 5% by 25 °C/ 77°F.
Long-term resistance stability by sensor Pt100 is 0.05% (10 000 hours).

Diagramm of sensor warm up via air

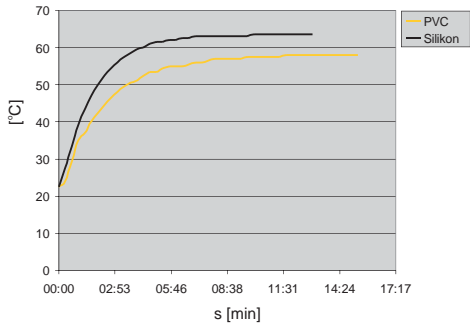

PVC -reaction to water temperature from 22.5 1°C to 58°C.
Silicone - reaction to water temperature from 22.5°C to 63.5°C.





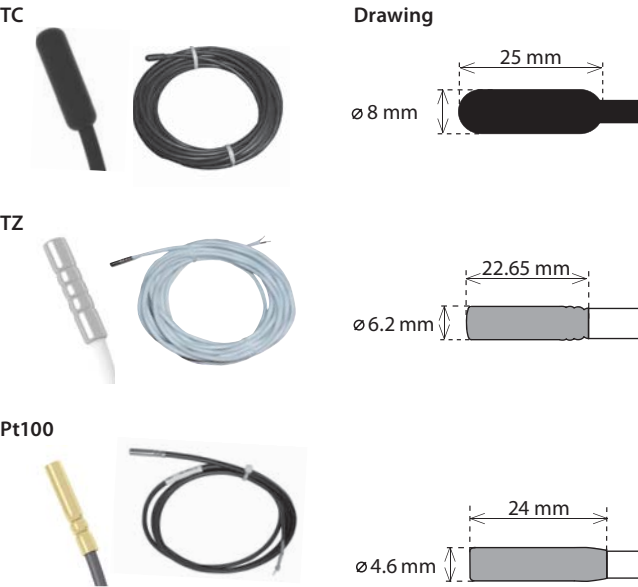













Sensor photo







































Loadability of contacts



















Minimum load		
Relay contact	mV	V/mA
AgSnO ₂	1000	10/100





Minimum load		
Relay contact	mV	V/mA
AgNi	300	5/10

GCR3-11, GCH3-31, GMR3-61, SA3-02B, SA3-06M, SA3-012M, WMR3-21									
Type of load	 cos φ ≥ 0.95								
AC1	AC2	AC3	AC5a uncompensated	AC5a compensated	AC5b	AC6a	AC7b	AC12	
Contact material AgSnO ₂ , contact 8A	250V / 8A	250V / 2.5A	250V / 1.5A	230V / 1.5A (345VA)	230V / 1.5A (345VA) till max output C=14uF	250W	250V / 4A	250V / 1A	250V / 1A
Type of load									
AC13	AC14	AC15	DC1	DC3	DC5	DC12	DC13	DC14	
Contact material AgSnO ₂ , contact 8A	x	250V / 3A	250V / 3A	24V / 8A	24V / 3A	24V / 2A	24V / 8A	24V / 1A	x

CU3-04M (RE7 - RE-10), LBC3-02M, SA3-01B, SA3-02M, SA3-04M, SA3-022M (RE7 - RE-10), EA3-022M (RE7 - RE-10), JA3-018M (U/D1 - U/D9)									
Type of load	 cos φ ≥ 0.95					 HAL 230V			
AC1	AC2	AC3	AC5a uncompensated	AC5a compensated	AC5b	AC6a	AC7b	AC12	
Contact material AgSnO ₂ , contact 16A	250V / 16A	250V / 5A	250V / 3A	230V / 3A (690VA)	230V / 3A (690VA) till max output C=14uF	1500W	x	250V / 3A	250V / 10A
Type of load									
AC13	AC14	AC15	DC1	DC3	DC5	DC12	DC13	DC14	
Contact material AgSnO ₂ , contact 16A	250 / 6A	250V / 6A	250V / 6A	24V / 16A	24V / 6A	24V / 4A	24V / 16A	24V / 2A	24V / 2A








SA3-02B/Ni*, SA3-06M/Ni*, SA3-012M/Ni*									
Type of load	 cos φ ≥ 0.95								
	AC1	AC2	AC3	AC5a uncompensated	AC5a compensated	AC5b	AC6a	AC7b	AC12
Contact material AgNi contact 8A	250V / 8A	250V / 2.5A	250V / 1.5A	230V / 1.5A (345VA)	x	400W	x	250V / 1.5A	250V / 5A
Type of load									
	AC13	AC14	AC15	DC1	DC3	DC5	DC12	DC13	DC14
Contact material AgNi contact 8A	250 / 3A	250V / 3A	250V / 3A	24V / 8A	24V / 3A	24V / 2A	24V / 8A	24V / 1A	24V / 1A













SA3-01B/Ni*, SA3-06M/Ni*, SA3-04M/Ni*									
Type of load	 cos φ ≥ 0.95					 HAL 230V			
	AC1	AC2	AC3	AC5a uncompensated	AC5a compensated	AC5b	AC6a	AC7b	AC12
Contact material AgNi contact 16A	250V / 16A	250V / 5A	250V / 3A	230V / 3A (690VA)	x	800W	x	250V / 3A	250V / 10A
Type of load									
	AC13	AC14	AC15	DC1	DC3	DC5	DC12	DC13	DC14
Contact material AgNi contact 16A	250 / 6A	250V / 6A	250V / 6A	24V / 16A	24V / 6A	24V / 4A	24V / 16A	24V / 2A	24V / 2A

JA3-018M (U/D1 - U/D9), CU3-04M (RE1 - RE6, OUT1 - OUT2, RE11 - RE16), SA3-022M (RE1 - RE6, OUT1 - OUT2, RE11 - RE16, SHUTTER), EA3-022M (RE1 - RE6, OUT1 - OUT2, RE11 - RE16, SHUTTER), FA3-612M (FAN1 - FAN3, RE)				
Type of load	 cos φ ≥ 0.95			
	AC1	AC3	AC15	DC1
Contact material AgNi contact 6A	250V / 6A	230V / 0.8A	230V / 1.3A	30V / 3A 110V / 0.2A 220V / 0.12A

Demonstrated symbols are informative.
*Products with AgNi contact only up on request for extra charge.

Loadability of contacts

Load	bulbs, halogen bulbs	12–24V low-voltage bulbs, coil transformers	12–24V low-voltage bulbs, electric transformers	LEDs	energy-saving fluorescent tubes	control method	
	 R	 L	 C	 dimmable	 dimmable	 entering edge	 trailing edge
DA3-22M	•	•	•	•	•	•	•
DA3-06M	•	•	•	•	•	•	•

Explanations			
	El. bulbs loads: el. bulb, halogen light (R)		Elektronic ballasts for fluorescent (L)
	Dimmer with defined load: R - resistive, L - inductive, C - capacitive		Inductive loads (transformers): feromagnetic and toroid transformers for lights with various voltage.
	Fluorescent light: fluorescent lights uncompensated		Switch: switch - control contact of various device
	Fluorescent light: fluorescent light compensated in series		Button: control button
	Fluorescent light: fluorescent light compensated in parallel		Control module: analog control module 0 - 10 V
	Fluorescent light: fluorescent light economical		Motor

Category of use	Typical use
AC current, cosφ = P/S (-)	
AC-1	Non-inductive or slightly inductive load, resistance furnace Includes all appliances supplied by AC current with power factor (cos φ) ≥ 0.95 Examples of usage: resistance furnace, industrial loads
AC-2	Motors with slip-ring armature, switching off
AC-3	Motors with short-circuit armature, motor switching when in operation This category applies to switching off motors with short-circuit armature while in operation. While switching, contactor switches current which is 5 up to 7 times rated current of motor.
AC-5a	Switching of electrical gas-filled lights, fluorescent lights
AC-5b	El. bulb switching Enables low contact loading due to resistance of cold fi ber is many times smaller that the one of hot fi ber.
AC-6a	Switching of transformers
AC-7b	Load of motors for home appliances
AC-12	Switching of semiconductor loads with separation transformers
AC-13	Switching of semiconductor loads with separation transformers
AC-14	Switching of low electro-magnetic loads (max.72 VA)
AC-15	Management of alternating electro-magnetic loads This category applies to switching inductive loads with input for closed electro-magnetic circuit higher than 72 VA Use: switching coils of contactors Note: Category AC 15 replaces formerly used category AC 11

DC current, t = L/R (s)	
DC-1	Non-inductive or low inductive load, resistive furnaces
DC-3	Shunt motors: start-up, braking by backset, reversion, resistive braking
DC-5	Series motor: start-up, braking by backset, reversion, resistive braking
DC-12	Management of resistive loads and fixed loads with insulation by opto-electric element
DC-13	Switching of electromagnets
DC-14	Switching of electromagnetic loads in circuits with limiting resistor

ELKO EP as the manufacturer has the right to make technical changes to the product technical specification and product manual without prior notice.



1) Surface mounted

Wall mounted in an installation box with spacing of 65 mm.

EST3	GSB3-60	GSB3-260/S
EHT3	GSB3-80	GSP3-100
GBP3-60x	GSB3-240	GSP3-100/PRO
GBP3-60x/PRO	GSB3-260	GSP3-2100
GBP3-260x	GSB3-280	GMR3-61
GCR3-11	GSB3-20/S	IDRT3-1
GCR3-11/PRO	GSB3-40/S	WMR3-21
GCR3-211	GSB3-60/S	WSB3-20
GCH3-31	GSB3-20/PRO/S	WSB3-20H
GCH3-231	GSB3-40/PRO/S	WSB3-40
GRT3-50	GSB3-60/PRO/S	WSB3-40H
GRT3-250	GSB3-220/S	
GSB3-40	GSB3-240/S	



2) DIN Rail mounted

On DIN rail according to EN 60715.

ADC3-60M	DAC3-04M	MI3-02M/EHT
BPS3-01M	DCDA-33M	PS3-30/iNELS
BPS3-02M	EA3-022M	PS3-100/iNELS
CU3-01M	EMDC-64M	SA3-02M
CU3-02M	FA3-612M	SA3-04M
CU3-03M	GSM3-01M	SA3-06M
CU3-04M	IM3-140M	SA3-012M
mini CU3-07M	JA3-09M	SA3-022M
DA3-06M	LBC3-02M	TI3-60M
DA3-22M	MI3-02M	



4) Mounted to or in the installation box

Mounted in an installation box or built into the device.

DAC3-04B	IM3-80B	SA3-02B
IM3-20B	JA3-02B/DC	TI3-10B
IM3-40B	SA3-01B	TI3-40B



4) Mounted into the cover of appliance

SA3-01B
SA3-02B



5) Surface mounted

Other attachment options.


DLS3-1
iTP 10"



6) Ceiling mounting


DMD3-1

1-MODUL

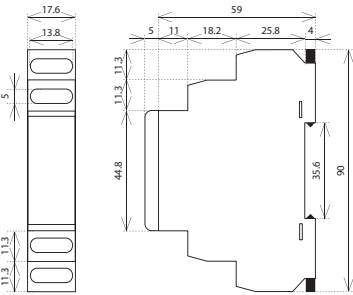

BPS3-01M
BPS3-02M
CU3-07M
MI3-02M
SA3-02M


3-MODUL

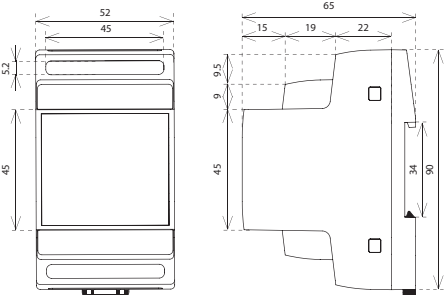

ADC3-60M
DA3-22M
DAC3-04M
DCDA-33M
EMDC-64M
GSM3-01M
IM3-140M

LBC3-02M
PS3-30/iNELS
SA3-04M
SA3-06M
TI3-60M
RFDA-73M/RGB


6-MODUL

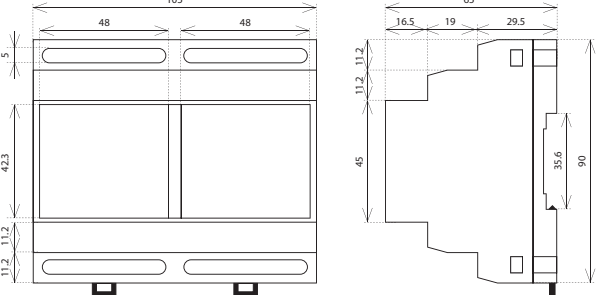


CU3-01M
CU3-02M
CU3-03M
DA3-06M
EA3-022M
FA3-612M

JA3-09M
PS3-100/iNELS
SA3-012M
SA3-022M


MINI




IM3-20B
IM3-40B
JA3-02B/DC




DAC3-04B
IM3-80B
TI3-10B
TI3-40B



SA3-01B
SA3-02B

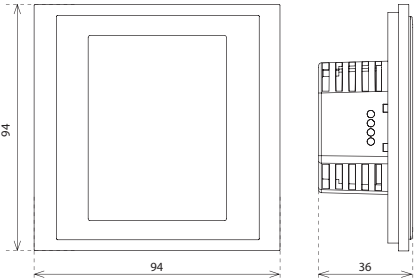


EST3-1
EHT3-1

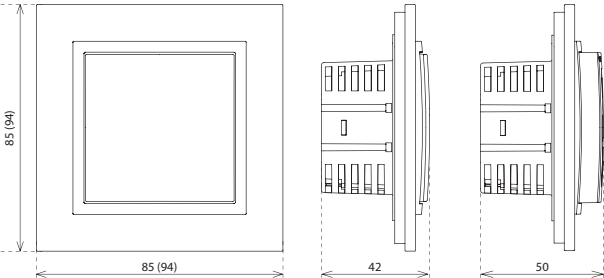

WSB3-20
WSB3-20H
WSB3-40
WSB3-40H
WMR3-21


IDRT3-1

Dimensions

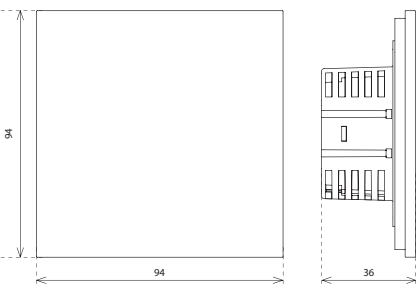


GCR3-11
GCR3-11/PRO
GDB3-10
GDB3-10/PRO
GMR3-61
GRT3-50
GSB3-40
GSB3-60


GSB3-80
GSB3-20/S
GSB3-40/S
GSB3-60/S
GSB3-20/PRO/S
GSB3-40/PRO/S
GSB3-60/PRO/S

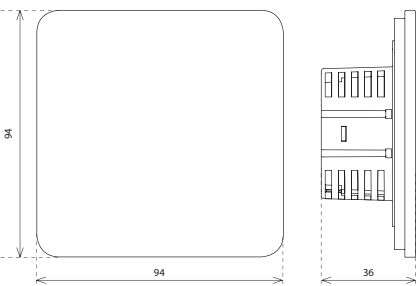


GCR3-211
GDB3-210
GRT3-250
GSB3-240
GSB3-260
GSB3-280
GSB3-220/S
GSB3-240/S
GSB3-260/S

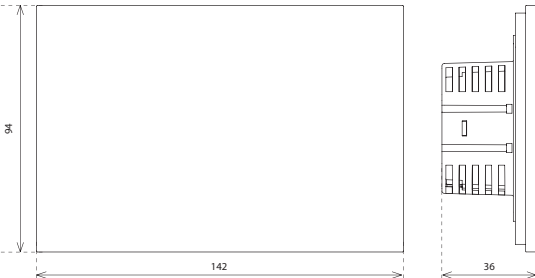

GSP3-100
GSP3-100/PRO
GCH3-31

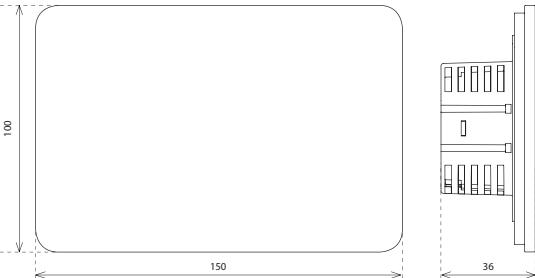


GSP3-2100
GCH3-231

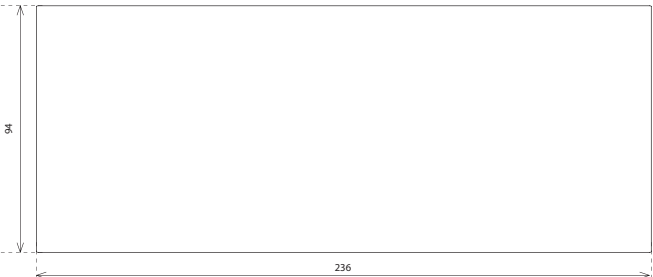


GBP3-60x/2F




GBP3-260x/2F




DMD3-1



IP65



DLS3-1

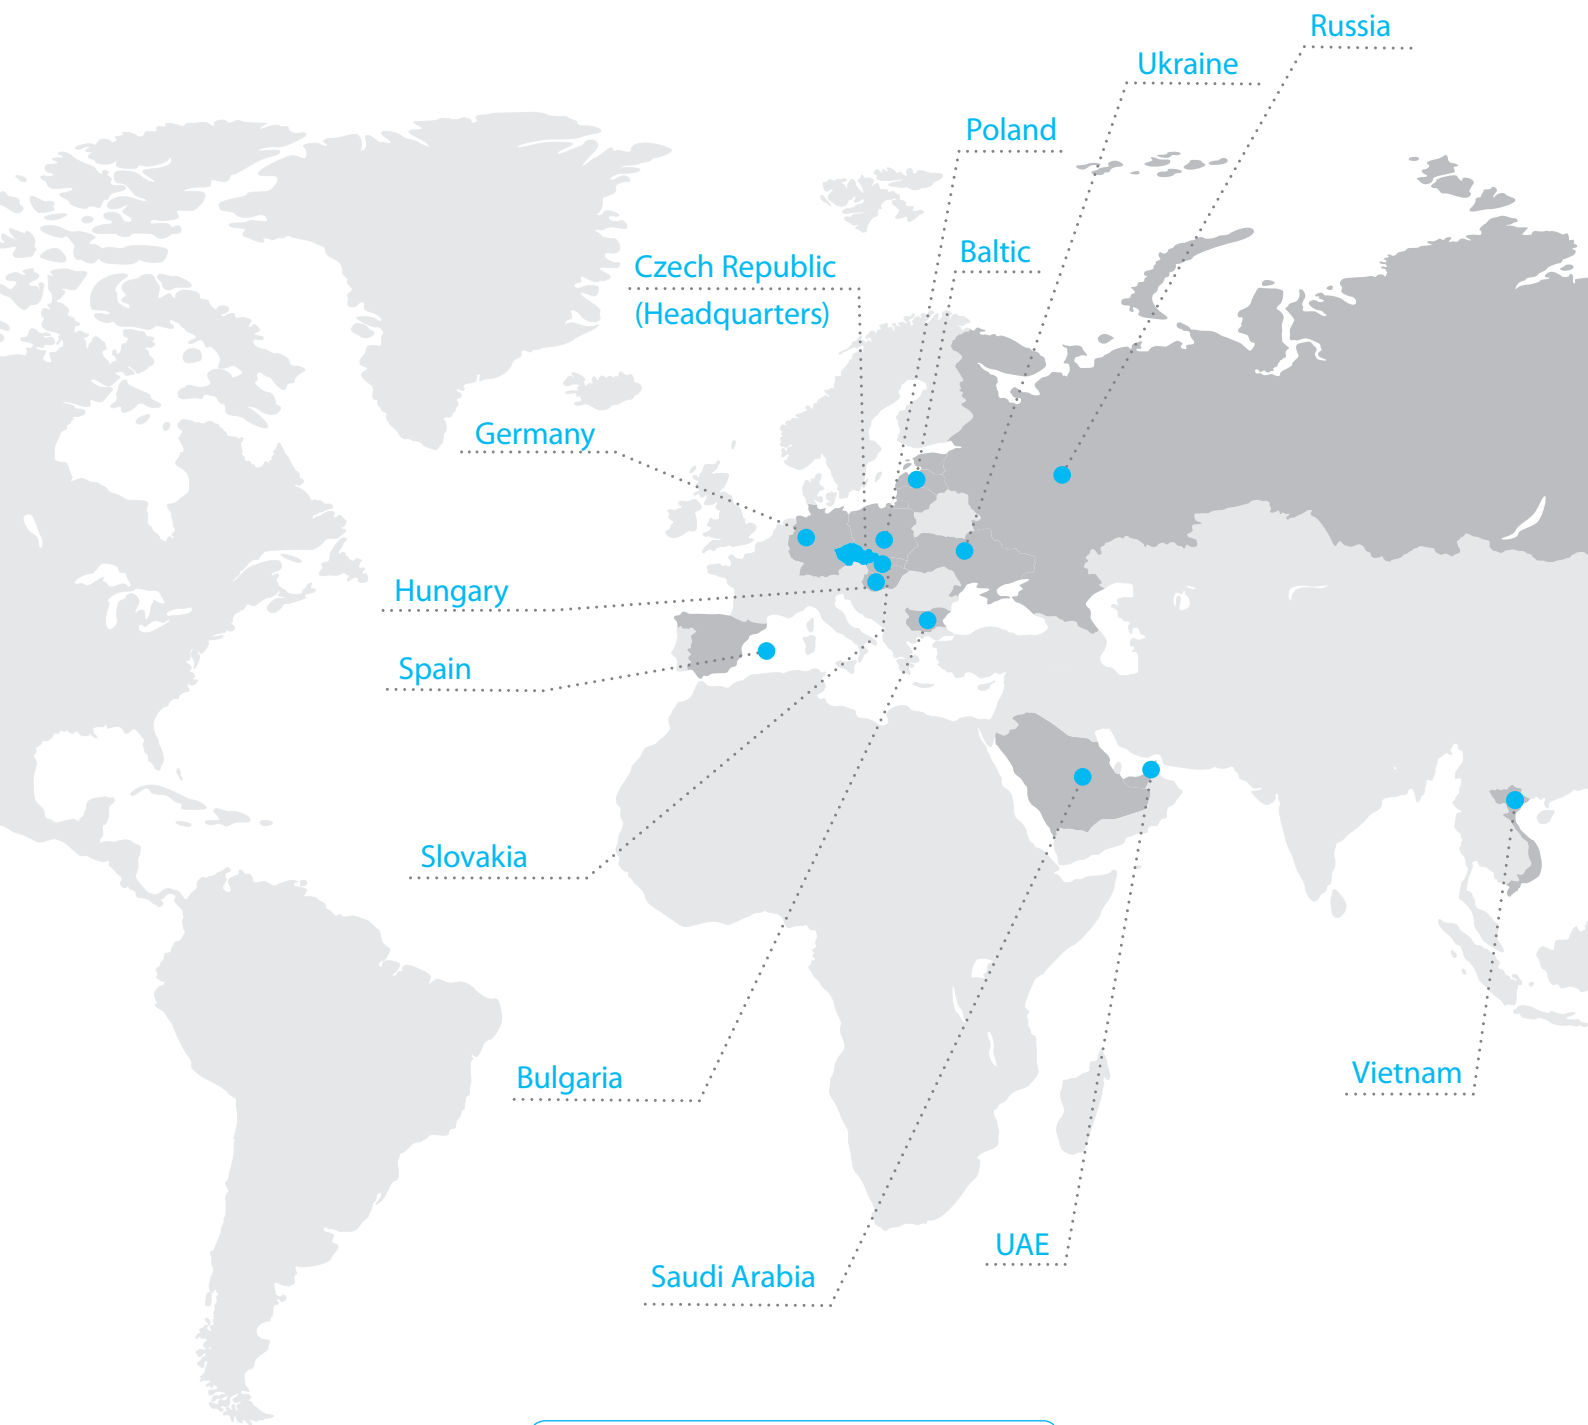

ELKO EP, s.r.o.

Palackého 493 | 769 01 Holesov, Vsetuly | Czech Republic
phone: +420 573 514 221 | fax: +420 573 514 227 | elko@elkoep.com | www.elkoep.com

Published: 02/2020 | Modifications or amendments reserved | © Copyright ELKO EP, s.r.o. | 1st edition