

# BUS

Wired electro-installation



[www.elkoep.com/bus](http://www.elkoep.com/bus)





---

**ELKO EP**

---

**ELKO EP have been your partner in the field for 30 years, developing and manufacturing the highest quality electronic devices for electroinstallation as well as smart system for residential and building automation.**

ELKO EP employs more than 330 people across 15 foreign branches and exports its products to more than seventy countries. Company of the Year, Visionary of the Year, Superbrands and Global Exporter of the Year are just some of the awards we have received throughout the years as we consistently strive to move forward in the field of innovation and development.

Millions of relays, thousands of smart homes, hundreds of buildings and many satisfied customers - This is ELKO EP; a traditional company based in the center of Europe, where own development, production, logistics, and service are at the forefront of our focus.

# Facts and stats



**30 %**

Czech

**40 %**

export

**30 %**

branches



## WORLDWIDE

11 branches  
6 franchises  
70 export countries

**350**


employees  
in holding

**30 000 +**

iNELS  
installations

**30 000 000 +**

manufactured  
products



## R&D

continuosly  
innovative

## MANUFACTURER

fully automated  
complete proces

## SUPPORT

24 / 7 / 365

**World leader**  
in DIN rail relays production



iNELS BUS infrastructure .....	6
iNELS topology .....	8
Overview of system units .....	10

### Central units

CU3-07M   Central unit with 1x BUS, 1x EBM .....	14
CU3-08M   Central unit with 2x BUS .....	15
CU3-09M/DALI   Central unit with 1x BUS, 1x DALI - <b>NEW!</b> .....	16
CU3-10M   Central unit with 1x BUS, 1x MODBUS - <b>NEW!</b> .....	17

### System units

PS3-30/iNELS   Power supply with BUS separator .....	18
BPS3-01M, BPS3-02M   Bus separator from power supply .....	19
PSM3-30/iNELS, PSM3-60/iNELS, PSM3-100/iNELS   Power supplies for iNELS BUS .....	20

### Lighting control

EMDC-64M   Converter iNELS EBM - DALI/DMX .....	22
-------------------------------------------------	----

### Detectors | sensors

MCD3-1   Ultra slim microwave motion detector - ceiling mount - <b>NEW!</b> .....	23
PMS3-1   Ultra slim PIR motion detector - ceiling mount - <b>NEW!</b> .....	24
DLS3-1   Light intensity sensor .....	25

### Converters

ADC3-60M   Analog-to-digital converter, 6 input .....	26
DAC3-04M   Digital-to-analog converter, 4 input .....	27

### Switching actuators

SA3-01B, SA3-02B   Switching actuator, 1 channel and 2 channels .....	28
SA3-04M   Switching actuator, 4 channels .....	29
SA3-06M   Switching actuator, 6 channels .....	30
SA3-014M & SA3-014M/E   Switching actuator, 14 channels - <b>NEW!</b> .....	31
SA3-022M   Switching actuator, 22 channels .....	32
EA3-022M   Switching actuator without controls and indicators, 22 channels .....	33

### Shutter actuators

JA3-014M & JA3-014M/E   Shutter actuator, 14 channels - <b>NEW!</b> .....	34
---------------------------------------------------------------------------	----

### Dimming actuators

DA3-22M   Universal dimming actuator, 2 channels .....	36
DA3-66M   Dimming actuator, 6 channels .....	37
DA3-03M/RGBW   Dimming actuator for RGBW strips .....	38

### Input units

IM3-40B, IM3-80B   Binary input units, 4 channels and 8 channels .....	39
IM3-140M   Binary input unit, 14 channels .....	40
TI3-40B   Temperature input, 4 channels .....	41
TI3-60M   Temperature input, 6 channels .....	42

### Combined units

RC3-610M/DALI   Room controller with DALI dimmer - <b>NEW!</b> .....	43
FA3-612M   Special unit for controlling fan coils .....	44
IOU3-108M   Universal unit with inputs and outputs, 10 inputs and 8 outputs .....	45



**Wall controllers**

WSB3-20, WSB3-20H | Wall switch button, 2 buttons ..... 46  
 WSB3-40, WSB3-40H | Wall switch button, 4 buttons ..... 47  
 WMR3-21 | Wall card reader ..... 48

**Glass controllers**

GMR3-61 | Glass card reader ..... 49  
 GSB3-40, GSB3-60, GSB3-90, GSB3-240, GSB3-260, GSB3-290 | Glass switch button - **NEW!** ..... 50  
 GSB3-40/S, GSB3-60/S, GSB3-90/S, GSB3-240/S, GSB3-260/S, GSB3-290/S | Glass switch button with symbols - **NEW!** ..... 52

**Metal controllers**

MSB3-40, MSB3-60, MSB3-90 | Metal switch button - **NEW!** ..... 54

**Thermo-regulators**

IDRT3-1 | Digital room thermo-regulator ..... 56  
 GRT3-50 | Glass room thermo-regulator ..... 57  
 GRT3-70, GRT3-270 | Glass room thermo-regulator - **NEW!** ..... 58

**Touch units**

EST4 | 4" touch control panel - **NEW!** ..... 59  
 iNELS TOUCH iA10 | 10" touch control panel - **NEW!** ..... 60

**Integration**

iNELS Bridge | Third-party integration gateway - **NEW!** ..... 61  
 Connection Server II. | Third-party integration server - **NEW!** ..... 62  
 MQTT | The Standard for IoT Messaging ..... 64

**Multimedia**

LARA Radio ..... 66  
 LARA Intercom ..... 67  
 LARA accessories ..... 68

**iNELS app**

..... 70

**Accessories iNELS**

TELVA-2 230V, TELVA-2 24V | Thermodrive ..... 72  
 TC, TZ, Pt100 | Thermo sensors ..... 73

BUS electro-installation ..... 74  
 Product loadability ..... 75  
 Loadability of contacts ..... 76  
 Installation possibilities ..... 78  
 Dimensions ..... 80


# Open topology with new possibilities

**iNELS BUS comes with a progressive system architecture using the IP protocol and MQTT protocol.**

Evolutionary change in the structure of the connection to the units in the iNELS units and iNELS BUS, it is now possible to use the IP protocol and MQTT protocol to connect individual unit's in the central units and to the units connected to other central units in same network . The new IP infrastructure brings about the full potential of using iNELS bus units in small, medium and very large installations.

## MiniCU Family


Unlike the previous version of iNELS BUS, where all buses were connected to one central unit, in the new structure each bus is fully autonomous, thanks to the minified version of the central unit (CU3-07 / 08M / 09M / 10M). MiniCU (short name for single-module central unit) is a full-fledged central unit that controls only 1 or 2 buses with additional bus EBM/Dali/Modbus. The main difference is that full functionality is maintained even if communication with other units is lost, so that all units connected to the MiniCU remain interconnected, including all predefined links. After the connection with the superior units is re-established, the centrally controlled functions will only be synchronized and restored.

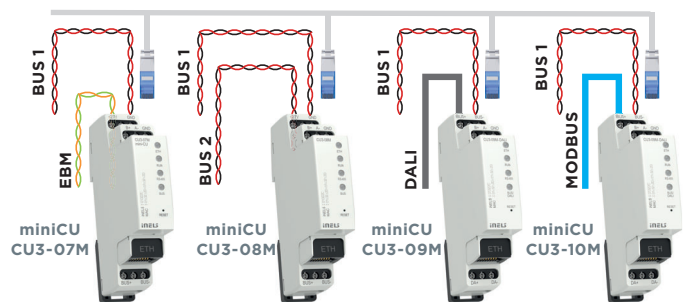

	CU3-07M	CU3-08M	CU3-09M	CU3-10M
BUS1	✓	✓	✓	✓
BUS2		✓		
EBM BUS	✓			
DALI BUS			✓	
MODBUS				✓


## Central control even for large installations

Central control of automation devices in large installations is an effective way to streamline operations, enhance safety, and reduce costs. It refers to the process of managing and coordinating the operation of numerous iNELS devices from a central location. The central control system serves as a hub that connects and monitors various iNELS devices, including sensors, actuators, and controllers. The iNELS system uses a network of communication protocols such as MQTT and IP protocol to collect and exchange data from the connected devices, enabling the devices to work in harmony.

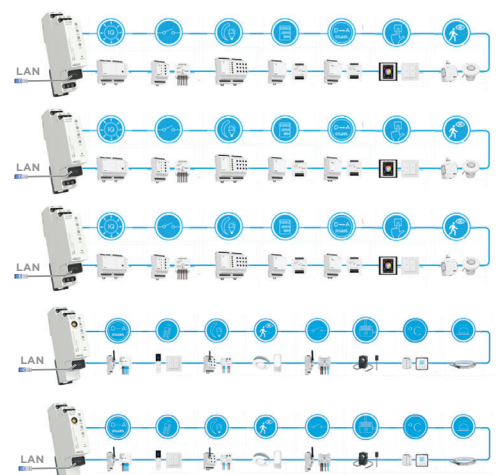


### MQTT in Central units for easy integration and control

To keep the integration simple, we have implemented MQTT communication in all our central units. Since it is industry protocol with a fast response time, It makes the interaction between devices efficient, whatever the number of devices there is. We used MQTT as a light and energy-efficient communication protocol in our BUS and wireless solution. This allows to use data and logics from iNELS units to sends it to the other system with real-time.

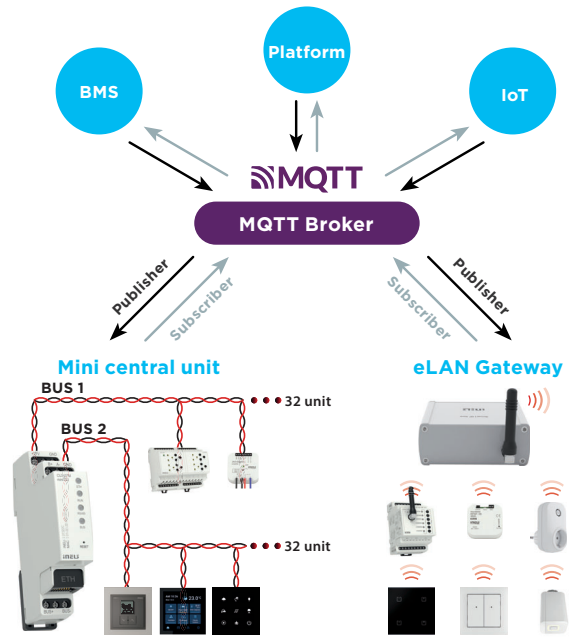


### Central supervision & global conditionality

The new IP infrastructure consists not only in the connection between the MiniCU, but also in the connection to the central iNELS CLOUD system. Using the cloud, it is possible to connect, individual Central units with all their subordinate units, buses and elements. This creates not only the possibility of unlimited scaling of the iNELS BUS system, but also the possibility of creating interrelated functions, where the control element on one installation can control the actuators on a geographically remote installation controlled by another Central unit or eLAN gateway.

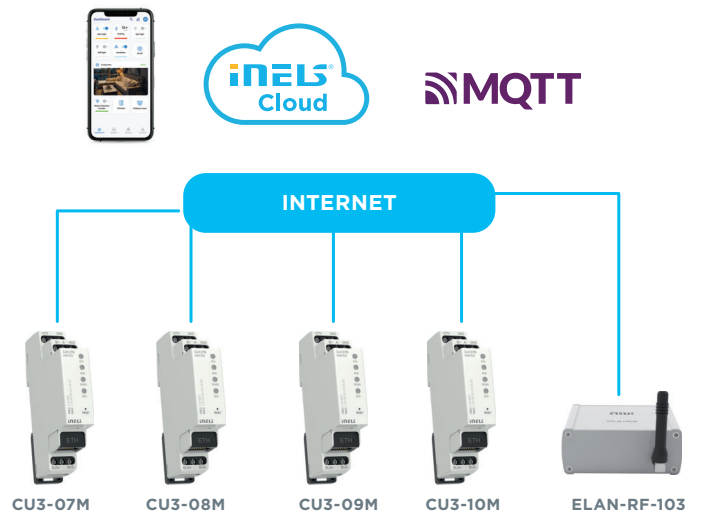

### iNELS Bridge

The new IP infrastructure also includes the option of connecting iNELS central units (wired/wireless technology) and newly implemented third-party integration control unit iNELS Bridge. With the help of iNELS Bridge, It is possible to integrate almost the entire iNELS portfolio, including third-party devices that can be connected using the open Home Assistant platform. iNELS Bridge is also pre installed with Connection server and Asterisk for 3rd party integration.

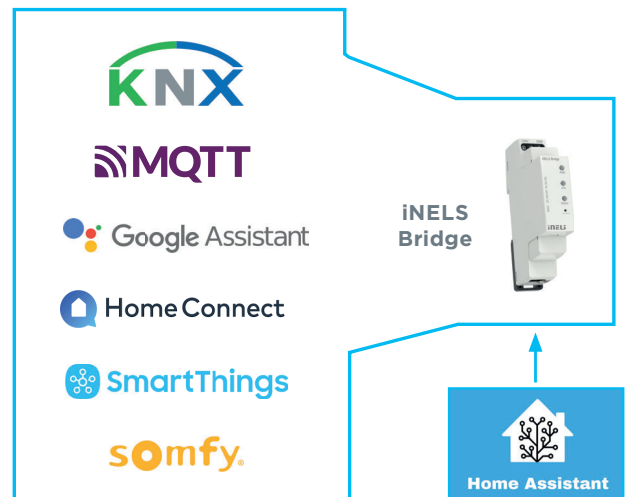



Protocols

ASIRAC **BACnet** M-Bus  
**Modbus** Java  
**HTTP** API { json }

Integrations

Home Assistant  
 Asterisk  
 Node-RED  
 MQTT Broker

iNELS Bridge



MQTT

Building management system

EasyIO<sup>®</sup> iRidi  
**NETX** niagara framework<sup>®</sup>  
 AUTOMATION  
 Opera **FLOWBOX**

Heating & Cooling

**DAIKIN** Panasonic LG  
 IntesisBox<sup>®</sup> GREE  
 COOLAUTOMATION SAMSUNG  
 INSPINIA  
 Aircon Interfaces

3<sup>rd</sup> party systems

**KNX** PHILIPS hue tuya<sup>®</sup>  
 ZWAVE CRESTRON Control4<sup>®</sup>  
 LUTRON somfy.

Cameras & Intercoms

**dahua** HIKVISION<sup>®</sup> 2N  
An Axis company


Access control systems & PMS

VingCard Elsafe **HID** Opera  
 Onity **SALTO** inspiredaccess  
 dormakaba

Visualization

**INSPINIA**  
 Inspinia SQ 8" panel Inspinia SQ 10" panel  
 Inspinia RT 4" Retrofit panel Inspinia SQ 4" Room Controller

LOCAL NETWORK

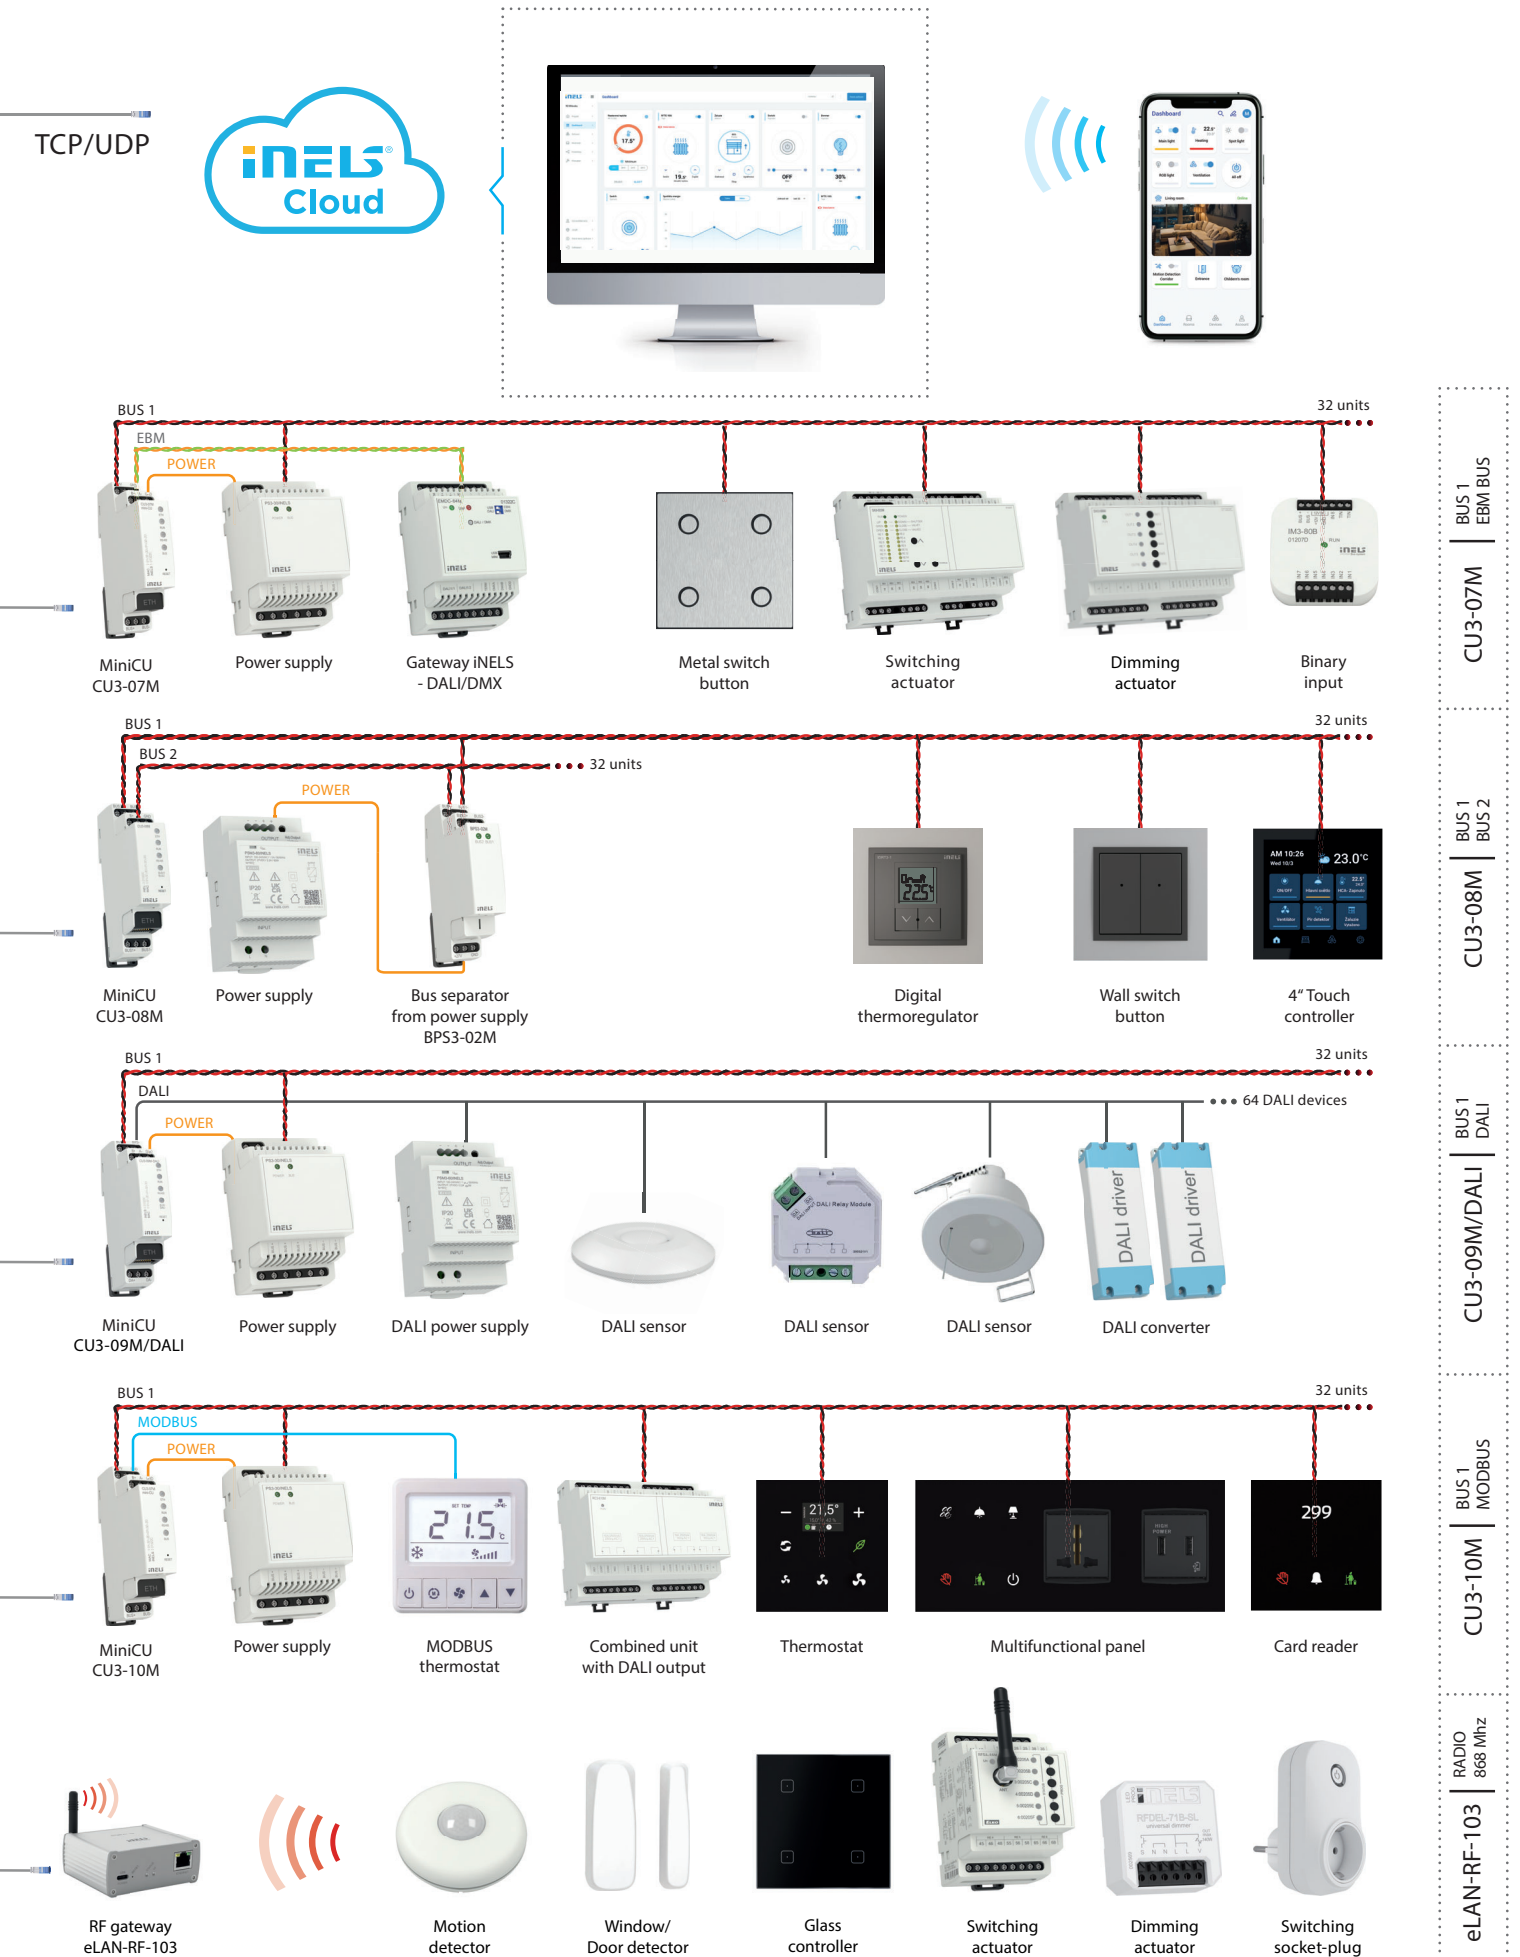

Central units

System units



**CU3-07M**  
Central unit  
with 1x BUS, 1x EBM,  
max. 32 Elements



**CU3-08M**  
Central unit  
with 2x BUS,  
max. 64 Elements



**CU3-09M/DALI**  
Central unit  
with 1 BUS, 1x DALI,  
max. 32 Elements



**CU3-10M**  
Central unit  
with 1x BUS,  
1x MODBUS



**PS3-30/iNELS**  
Power supply  
with integrated BUS  
separator



**BPS3-01M, BPS3-02M**  
Bus separator  
from power supply



**PSM3-30/iNELS**  
Power supply  
for iNELS BUS



**PSM3-60/iNELS**  
Power supply  
for iNELS BUS



**PSM3-100/iNELS**  
Power supply  
for iNELS BUS



**EMDC-64M**  
Converter iNELS  
EBM - DALI/DMX  
max. 64 address

Detectors | sensors

Converters



**MCD3-01**  
Ultra slim microwave motion  
detector - ceiling mount



**PMS3-01**  
Ultra slim PIR motion  
detector - ceiling mount



**DLS3-1**  
Light intensity  
sensor



**ADC3-60M**  
Analog-to-digital converter,  
6 inputs



**DAC3-04M**  
Digital-to-analog converter,  
4 outputs

Switching actuators



**SA3-01B, SA3-02B**  
Switching actuator,  
1 channel and 2 channels



**SA3-04M**  
Switching actuator,  
4 channels



**SA3-06M**  
Switching actuator,  
6 channels



**SA3-014M & SA3-014M/E**  
Switching actuator,  
14 channels



**SA3-022M**  
Switching actuator,  
22 channels



Shutter actuators



**EA3-022M**  
Switching actuator without controls and indicators, 22 channels



**JA3-014M & JA3-014M/E**  
Shutter actuator, 14 channels

Dimming actuators



**DA3-22M**  
Universal dimming actuator, 2 channels



**DA3-66M**  
Dimming actuator, 6 channels



**DA3-03M/RGBW**  
Dimming actuator for RGBW strips



**LBC3-02M**  
Dimming actuator for power supply 0-10V, 2 channels

Input units



**IM3-40B**  
Binary input unit, 4 channels



**IM3-80B**  
Binary input unit, 8 channels



**IM3-140M**  
Binary input unit, 14 channels



**TI3-40B**  
Temperature input, 4 channels


Combined units



**RC3-610M/DALI**  
Room controller with DALI dimmer




**FA3-612M**  
Special unit for controlling fan coils




**IOU3-108M**  
Universal unit with inputs and outputs, 10 inputs, 8 outputs


Wall controllers



**WSB3-20,  
WSB3-20H**  
Wall switch button,  
2 buttons




**WSB3-40,  
WSB3-40H**  
Wall switch button,  
4 buttons




**WMR3-21**  
Wall card reader


Glass controllers



**GMR3-61**  
Glass card reader




**GSB3-40**  
Glass switch  
button



**GSB3-60**  
Glass switch  
button



**GSB3-90**  
Glass switch  
button



**GSB3-40/S**  
Glass switch button  
with symbols




**GSB3-60/S**  
Glass switch button  
with symbols




**GSB3-90/S**  
Glass switch button  
with symbols


Metal controllers



**MSB3-40**  
Metal switch button



**MSB3-60**  
Metal switch button




**MSB3-90**  
Metal switch button

Thermo-regulators



**IDRT3-1**  
Digital room  
thermo-regulator



**GRT3-50**  
Glass room  
thermo-regulator



**GRT3-70**  
Glass room  
thermo-regulator



**GRT3-270**  
Glass room  
thermo-regulator

Touch units



**EST4**  
4" touch control panel



**iNELS TOUCH iA10**  
10" touch control panel

Integration




**iNELS Bridge**  
Third-party integration gateway




**Connection Server II.**  
Third-party integration server

Multimedia




**LARA Radio**  
Player Internet radio



**LARA Intercom**  
Multifunction communication equipment

iNELS app

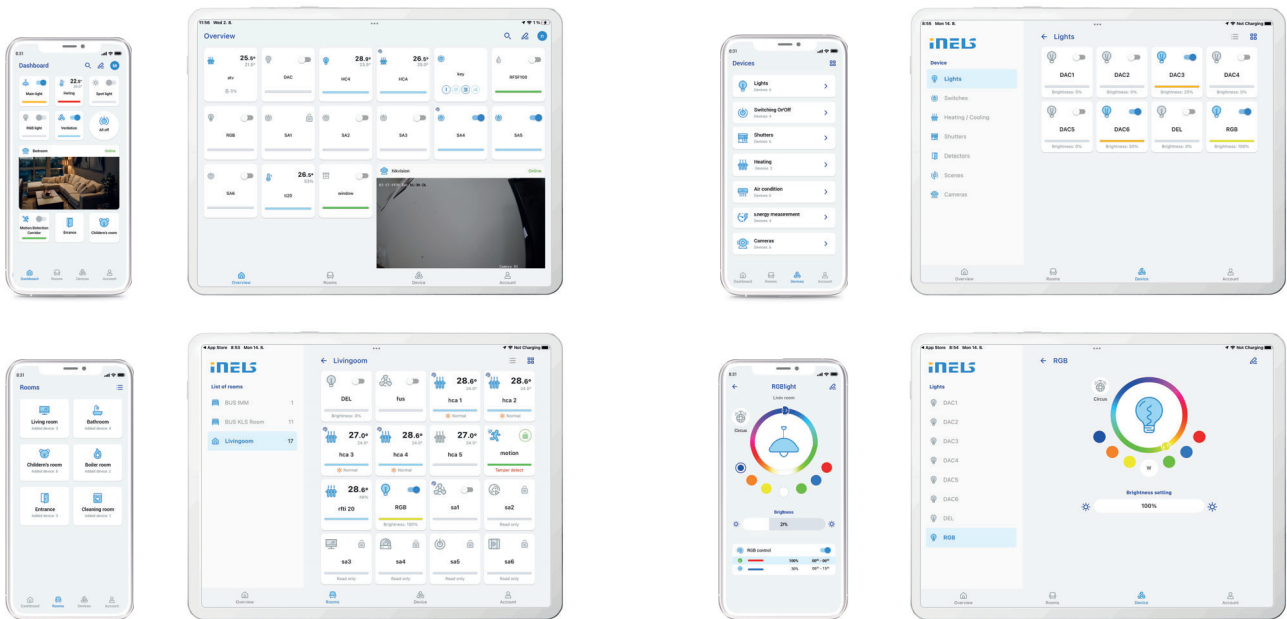

New application for controlling all compatible elements from the iNELS portfolio.

Accessories



**TELVA-2 230V,  
TELVA-2 24V**  
Thermdrive



**AN-I, AN-E**  
Internal antenna  
External antenna



**TC, TZ, Pt100**  
Thermo sensors





EAN code  
CU3-07M: 8595188180108

## Technical parameters

## CU3-07M

### Indication LED STATUS

Green LED RUN:	Flashing-communication with BUS, On-no communication
Red LED ERR:	Flashing - no project, ON - unit STOP

### Communication

<b>iNELS BUS</b>	
Indication (LED BUS):	green - unit status indication red - BUS fault indication
Maximum number of units:	max. 32 units to one BUS line
Maximum cable length:	max. 300 m (depends on power loss)

<b>BUS EBM</b>	
Indication:	green - indication communication red - faul indication
Maximum cable length:	max. 300 m

<b>Ethernet</b>	
Connector:	RJ45
Communication speed:	100 Mbps
Indication of the Ethernet (LED ETH):	green - Ethernet communication yellow - Ethernet speed 100 Mbps
The default IP address:	192.168.1.1

<b>Button RESET</b>	
Restart:	short press
Reset (Factory Reset):	press the button to apply power, release the button 10 s after power is applied


<b>Power supply</b>	
Supply voltage/tolerance:	27 V DC, -20/+10 %
Rated current:	50 mA (at 27 V DC)

<b>Operating conditions</b>	
Operating temperature:	-20 to +55 °C
Storage temperature:	-25 to +70 °C
Humidity:	max. 80%
Protection degree:	IP20 device, IP40 with cover in the switchboard
Overvoltage category:	II.
Pollution degree:	2
Operating position:	any
Installation:	to the switching board on the EN 60715 DIN rail
Design:	1-MODULE
Terminal:	max. 2.5 mm <sup>2</sup>

<b>Dimensions and weight</b>	
Dimensions:	94 x 17.6 x 64 mm
Weight:	72 g

- CU3-07M is one of the basic system control units of iNELS BUS installations.
- The unit can work independently, as an autonomous project, or it can be controlled by the central software as part of a larger project.
- The units is equipped with one BUS to which it is possible to connect up to 32 elements from the iNELS BUS portfolio.
- The current load of one line is max, 1 A, BPS3-01M with 3 A can be used incase of connected device with more than 1 A.
- The CU3-07M unit is equipped with one EBM bus. The EBM system bus allows to connect central unit with converter DALI/DMX EMDC-64M.
- The RJ45 100 Mbps Ethernet connector is used for direct communication with the cloud for mobile app control or for communication with the superior unit within the iNELS IP topology.
- Configuration takes place in the iNELS3 Designer & Manager software (iDM3).
- Through iDM3 it is possible to update the firmware of central units and bus connected peripheral units.
- The central unit is implemented with MQTT protocol for 3rd party communication.
- The units is powered by 27 V DC from iNELS power supply.
- System units CU3-07M in 1-MODULE design are designed for mouting into a switchboard on DIN rail EN60715.

## Connection

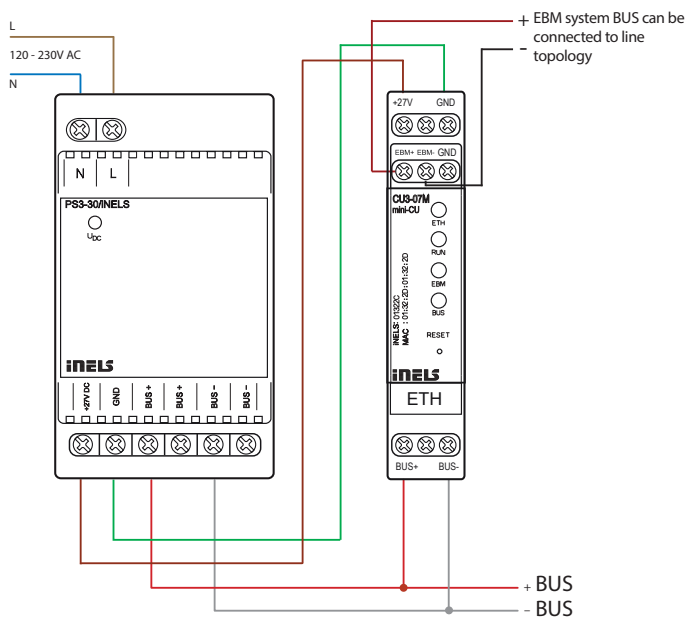

max. 32 units per BUS; max. 1A (PS3-30 / iNELS) per BUS




EAN code  
CU3-08M: 8595188184403

Technical parameters		CU3-08M
<b>Indication LED STATUS</b>		
Green - RUN:	The main program runs	
Red- ERR:	The main program stalled	
<b>Communication</b>		
System bus BUS1/BUS2		
Status indication (LED BUS):	green - indication of the operating status of the bus red - error indication on the bus	
Maximum number of units:	2x32 Units	
Maximum line length:	max. 300 m (depends on power loss)	
<b>Ethernet</b>		
Connector:	RJ45	
Communication speed:	100 Mbps	
Ethernet status indication (LED ETH):	green - Ethernet communication yellow - Ethernet speed 100 Mbps	
Default IP address:	192.168.1.1	
<b>RESET button</b>		
Restart:	Short press	
Reset (factory reset settings):	press the button to bring power on, button release 10 s after power is supplied	
<b>Power</b>		
<b>BUS1</b>		
Supply voltage/tolerance:	27 V DC, -20/+10 %	
Rated current:	50 mA (at 27 V DC)	
<b>BUS2</b>		
Supply voltage/tolerance:	27 V DC, -20/+10 %	
Rated current:	50 mA (at 27 V DC)	
<b>Operating conditions</b>		
Working temperature:	-20 to +55 °C	
Storage temperature:	-25 to +70 °C	
Air humidity:	max. 80%	
Degree of protection:	IP20 device, IP40 with cover in the control cabinet	
Surge category:	II.	
Degree of pollution:	2	
Working position:	any	
Installation:	to the control cabinet for DIN rail EN 60715	
Design:	1-MODULE	
Terminal plate:	max. 2.5 mm <sup>2</sup>	
<b>Dimensions and weight</b>		
Dimensions:	94 x 17.6 x 64 mm	
Weight:	72 g	

- CU3-08M is one of the basic system control of iNELS BUS installations.
- The unit can work independently, as an autonomous project, or it can be controlled by the central software as part of a larger Project.
- The units is equipped with two BUS, to which it is possible to connect a total of up to 64 elements (2x32) from the iNELS BUS portfolio.
- The current load of one line is max. 1 A. BPS3-01M with 3 A can be used in case of connected device with more than 1 A.
- The RJ45 100 Mbps Ethernet connector is used for direct communication with the cloud for mobile app control or for communication with the superior unit within the iNELS IP topology.
- Configuration takes place in the iNELS3 Designer & Manager software (iDM3). Through iDM3 it is possible to update the firmware of central units and bus connected peripheral units.
- The central unit is implemented with MQTT protocol for 3rd party communication.
- The units is powered by 27 V DC from iNELS power supply. BUS1 can power the central unit.
- System units CU3-08M in 1-MODULE design are designed for mounting into a switchboard on DIN rail EN60715.

Connection

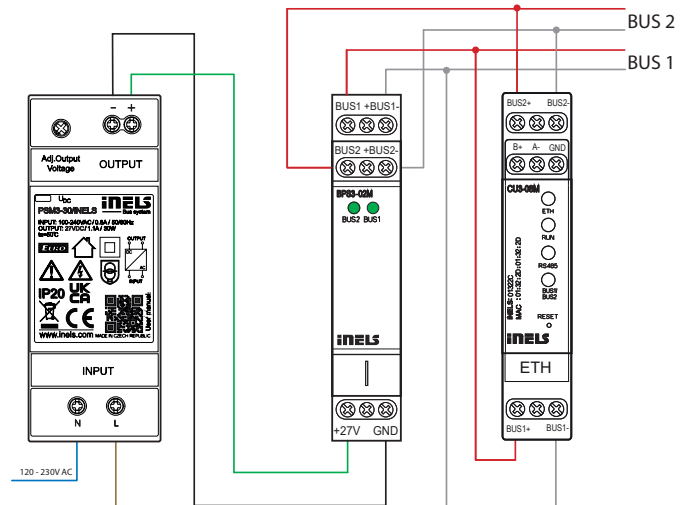



EAN code  
CU3-09M/DALI: 8595188184656

## Technical parameters

## CU3-09M/DALI

### Indication LED STATUS

Green - RUN:	The main program runs
Red - ERR:	The main program stalled

### Communication

#### System BUS

Maximum number of units:	max. 32 Units
Status indication (LED BUS):	green: BUS Operating Status red: error indication on the bus
Bus power supply:	external DALI power supply must be connected

#### Ethernet

Connector:	RJ45
Communication speed:	100 Mbps
Ethernet status indication (LED ETH):	green - Ethernet communication yellow - speed Ethernet 100 Mbps
Default IP address:	192.168.1.1

### RESET button

Restart:	short press
Reset (return to factory settings):	press the button to bring power on, button release 10 s after power is supplied

### Power

Supply voltage/tolerance:	27 V DC, -20/+10 %
Rated current:	50 mA (at 27 V DC)

### Operating conditions


Working temperature:	-20 to +55 °C
Storage temperature:	-25 to +70 °C
Air humidity:	max. 80%
Degree of protection:	IP20 device, IP40 with cover in the control cabinet
Surge Category:	II.
Degree of pollution:	2
Working position:	any
Installation:	to the control cabinet for DIN rail EN 60715
Design:	1-MODULE
Terminal plate:	max. 2.5 mm <sup>2</sup>

### Dimensions and weight

Dimensions:	94 x 17.6 x 64 mm
Weight:	72 g

- CU3-09M is one of the basic system control units of iNELS BUS installations.
- The unit can work independently, as an autonomous project, or it can be controlled by the central software as part of a larger project.
- The unit is equipped with one BUS to which it is possible to connect up to 32 elements from the iNELS BUS portfolio.
- The current load of one line is max. 1 A. BPS3-01M with 3 A can be used in case of connected device with more than 1 A.
- The CU3-09M/DALI system unit is equipped with one DALI bus.
- The DALI system bus allow control of up to 64 independent DALI ballast addresses for luminaires.
- Addressing of DALI can be done via the iDM3 software.
- The RJ45 100 Mbps Ethernet connector is used for direct communication with the cloud for mobile app control or for communication with the superior unit within the iNELS IP topology.
- Configuration takes place in the iNELS3 Designer & Manager software (iDM3).
- Through iDM3 it is possible to update the firmware of central units and bus connected peripheral units.
- The central unit is implemented with MQTT protocol for 3rd party communication.
- The unit is powered by 27 V DC from iNELS power supply. BUS1 can power the central unit.
- System units CU3-09M/DALI in 1-MODULE design are designed for mounting into a switchboard on DIN rail EN60715.

## Connection

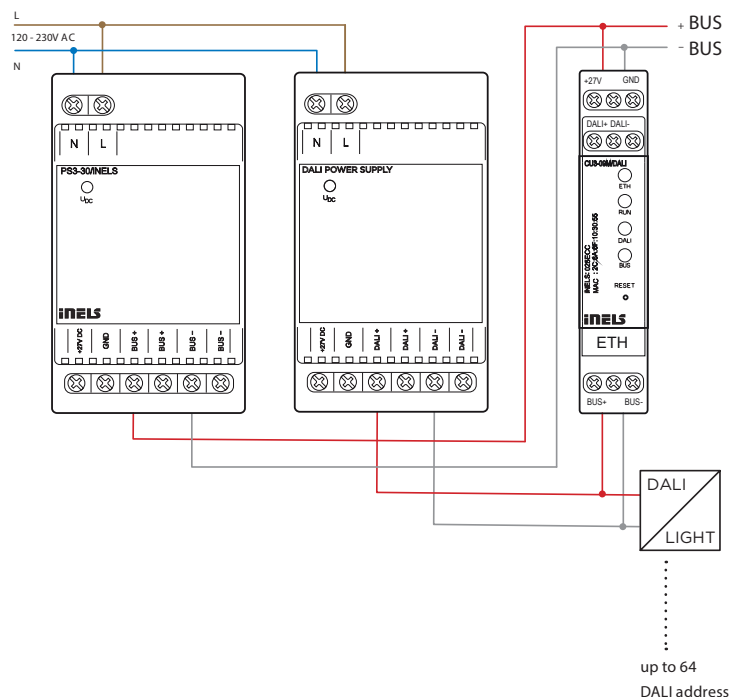

up to 64  
DALI address





EAN code  
CU3-10M: 8595188185219

**Technical parameters** **CU3-10M**

**Indication LED STATUS**

Green - RUN:	Flashing-communication with BUS, On-no communication
Red- ERR:	Flashing - no project, ON - unit STOP

**Communication**

System bus BUS1	
Status indication (LED BUS):	green - unit status indication red - BUS fault indication
Maximum number of units:	max. 32 units to one BUS line
Maximum line length:	max. 300 m (depends on power loss)

**Ethernet**

Connector:	RJ45
Communication speed:	100 Mbps
Ethernet status indication (LED ETH):	green - Ethernet communication yellow - Ethernet speed 100 Mbps
Default IP address:	192.168.1.1

**RESET button**

Restart:	short press
Reset (factory reset settings):	press the button to apply power, release the button 10 s after power is applied

**Power**

<b>BUS</b>	
Supply voltage/tolerance:	27 V DC, -20/+10 %
Rated current:	50 mA (at 27 V DC)

**Operating conditions**


Working temperature:	-20 to +55 °C
Storage temperature:	-25 to +70 °C
Air humidity:	max. 80%
Degree of protection:	IP20 device, IP40 with cover in the switchboard
Surge category:	II.
Degree of pollution:	2
Working position:	any
Installation:	to the switching board on the EN 60715 DIN rail
Design:	1-MODULE
Terminal plate:	max. 2.5 mm <sup>2</sup>

**Dimensions and weight**

Dimensions:	94 x 17.6 x 64 mm
Weight:	72 g

- CU3-10M is one of the basic system control units of iNELS BUS installations.
- The unit can work independently, as an autonomous project, or it can be controlled by the central software as part of a larger project.
- The unit is equipped with one BUS to switch it is possible to connect up to 32 elements from the iNELS BUS portfolio.
- The current load of one line is max. 1 A. BPS3-01M with 3 A can be used in case of connected device with more than 1 A.
- The CU3-10M system unit is equipped with one Modbus system bus. The Modbus system bus allows control of modbus thermostat and Air condition units (RS-485).
- The RJ45 100 Mbps Ethernet connector is used direct communication with the cloud for mobile app control or for communication with the superior unit within the iNELS IP topology.
- Configuration takes place in the iNELS3 Designer & Manager software (iDM3). Through iDM3 it is possible to update the firmware of central units and bus connected peripheral units.
- The central unit is implemented with MQTT protocol for 3rd party communication.
- The unit is powered by 27 V DC from iNELS power supply.
- System units CU3-10M in 1-MODULE design are designed for routing into a switchboard on DIN rail EN60715.

**Connection**

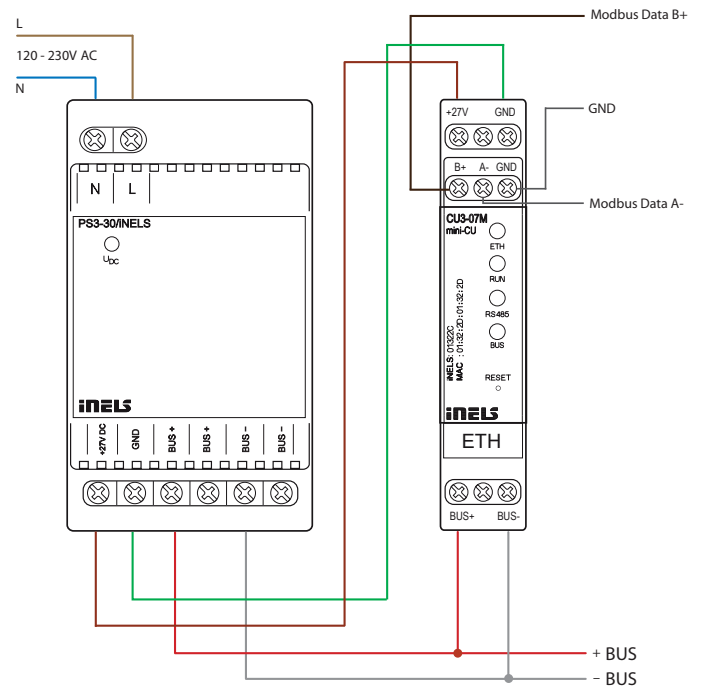



EAN code  
PS3-30/iNELS: 8595188180115

### Technical parameters PS3-30/iNELS

#### Input AC

Supply voltage:	100 - 250 V AC/50 - 60 Hz
Power dissipation:	max. 6.5 W
No-load power (apparent/active):	max. 10 VA/1.5 W
Power consumption at max. Load (apparent/active):	max. 54 VA/33 W
Protection:	T2A fuse inside the device

#### Outputs

Output voltage:	27 V
Max. load capacity:	1 A
Overall resource efficiency:	> 82 %
Time delay after Connection to AC network:	max. 5 s

#### Indication LED


Green LED POWER:	Supply voltage indication
Green LED BUS:	indication of the operating status of the bus

#### Operating conditions

Electrical power INPUT AC - OUTPUT BUS:	4 kV
Connection terminals:	Ordinal
Cross-section of connecting wires (mm <sup>2</sup> ):	max. 1 x 2.5, max. 2 x 1.5 (With core max. 1 x 1.5)
Working temperature:	-20 °C to +55 °C
Storage temperature:	-30 °C to +70 °C
Working air humidity:	20 to 90 % RH
Degree of protection:	IP20 device, IP40 with cover in the control cabinet
Surge category:	III.
Degree of pollution:	2
Working position:	any, optimally vertical
Installation:	to the control cabinet for DIN rail EN 60715
Design:	3-MODULE
Dimensions:	90 x 52 x 65 mm
Weight:	160 g
Related standards:	general: EN61204, safety: EN61204-7, EMC: EN61204-3

- PS3-30/iNELS is a switched stabilized power supply with a total power of 30 W.
- PS3-30/iNELS is used to power central units and external masters within the iNELS bus wiring.
- PS3-30/iNELS it is equipped with electronic protection against short circuit, overvoltage, power and temperature overload.
- The power supply includes an internally integrated BPS3-01M bus isolator to power one branch of the BUS, from which the iNELS peripheral units are further powered.
- PS3-30/iNELS 3-MODULE is designed for mounting in a switchboard on DIN rail EN60715.

### Connection

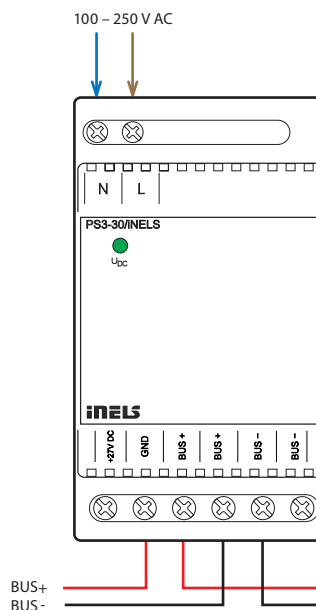




EAN code  
 BPS3-01M: 8595188132442  
 BPS3-02M: 8595188132435

Technical parameters	BPS3-01M	BPS3-02M
<b>Outputs</b>		
Maximum load capacity:	3 A	2x 1 A
<b>Communication</b>		
Installation bus:	1x BUS	2x BUS
<b>Power</b>		
Supply voltage/tolerance:	27 V DC, -20/+10 %	
Power dissipation:	max. 0.5 W	
Rated current without		
Output load:	max. 8 mA	max. 15 mA
Voltage status indication on		
Terminals:	1x green LED	2x green LED
<b>Connection</b>		
Terminal plate:	max. 2.5 mm <sup>2</sup> /1.5 mm <sup>2</sup> with core	
<b>Operating conditions</b>		
Working temperature:	-20 to +55 °C	
Storage temperature:	-30 to +70 °C	
Cover:	IP20 device, IP40 with cover in the control cabinet	
Surge category:	II.	
Degree of pollution:	2	
Working position:	any	
Installation:	to the control cabinet for DIN rail EN 60715	
Design:	1-MODULE	
<b>Dimensions and weight</b>		
Dimensions:	90 x 17.6 x 64 mm	
Weight:	70 g	85 g


- The BPS3-01M and BPS3-02M units are used for impedance separation of the BUS from the supply voltage source.
- A BPS3-01M or BPS3-02M bus isolator is required for each CU3-XXM central unit.
- BPS3-01M allows the connection of one BUS branch with a load of max. 3 A.
- BPS3-02M allows the connection of two BUS branches with a load of max. 1 A for each branch.
- The outputs are equipped with overcurrent and surge protection.
- Indication of the output voltage of the BUS outputs by LEDs.
- BPS3-01M, BPS3-02M in 1-MODULE design are designed for mounting in a switchboard on DIN rail EN60715.


Connection

BPS3-01M + CU3-07M

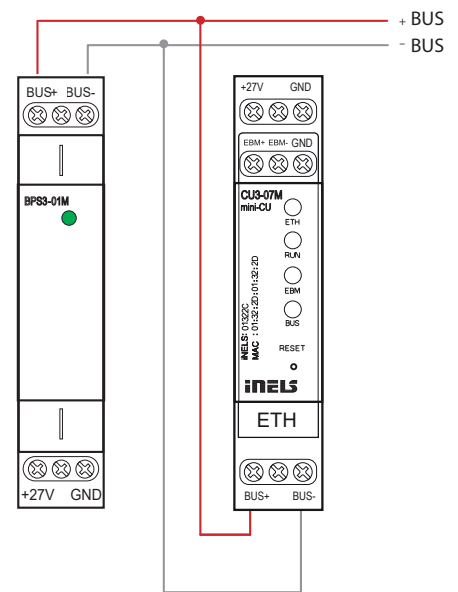

BPS3-02M + CU3-08M

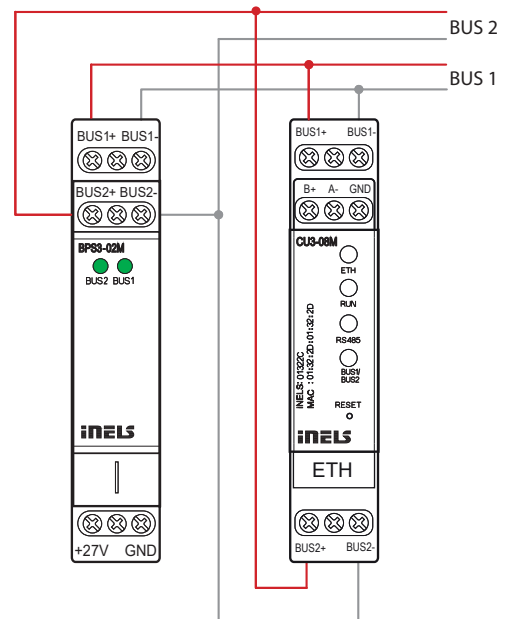

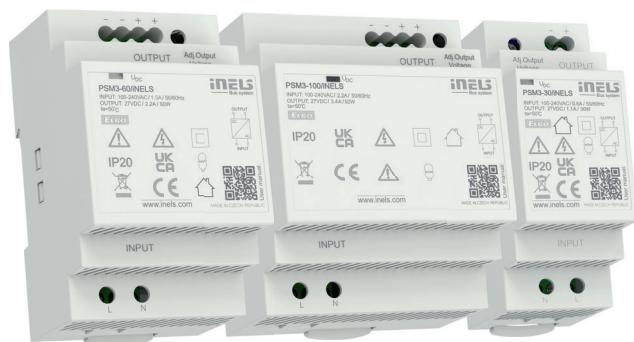

EAN code:  
 PSM3-100/iNELS - 8595188184786  
 PSM3-60/iNELS - 8595188184779  
 PSM3-30/iNELS - 8595188184762




- Used to supply central units and external master within intelligent electroinstallation iNELS.
- Through BUS separators from the supply voltage BPS3-01M and BPS3-02M, it supplies BUS lines from which iNELS peripheral units are also powered.
- Rated output voltage 27V DC with the possibility of regulation.
- High efficiency of up to 90%.
- Low ripple & noise.
- Protection: Overload, Over voltage and Short circuit.
- Continuously adjustable output voltage to adapt to the specific application, e.g. the need to compensate for the voltage drop caused by the length of the line.

Technical parameters	PSM3-30/iNELS	PSM3-60/iNELS	PSM3-100/iNELS
<b>Input</b>			
Voltage range:	AC 100 - 240 V (50-60 Hz)		
Tolerance:	± 10%		
Efficiency:	89%	90%	90%
Burden without load (max.):	0.4W / 8VA	0.5W / 6.5VA	0.1W / 12VA
Burden with full load (max.):	33W / 60VA	70W / 111VA	105W / 160VA
Inrush current:*	max. 25A at 115V AC/60Hz max. 45A at 240V AC/50Hz	max. 30A at 115V AC/60Hz max. 60A at 240V AC/50Hz	max. 35A at 115V AC/60Hz max. 70A at 240V AC/50Hz
<b>Output</b>			
Rated voltage:	27V DC	27V DC	27V DC
Vol. setting range:	21.5 - 28.5V	20.5 - 29V	24.5 - 28V
Rated current:	1.1A	2.2A	3.4A
Rated power:	30W	60W	92W
Ripple & Noise:	150mV	150mV	150mV
Output indication:	blue LED	green LED	blue LED
Tolerance of output voltage:	5 %		
Overload protection:	from 130% - 200% rated output power		
Overvoltage protection:	from 110 % - 145% rated output power		
Overcurrent protection:	from 110% - 180% rated output power		
Short circuit protection:	temporarily disconnecting the output		
<b>Other information</b>			
Operating temperature:	-20 to +50°C		
Operating humidity:	20% ~ 90% non-condensing		
Storage temperature:	-40 to +80°C		
Dielectric strength:	3kV AC		
Isolation resistance:	100M Ω / 500V DC / 25°C / 70% RH		
Overvoltage category:	III.		
Pollution degree:	2		
Max. cable size:	max. 1x 2.5 mm <sup>2</sup> , max. 2x 1.5 mm <sup>2</sup> solid wire / with sleeve max. 1x 2,5 mm <sup>2</sup>		
Terminal torque:			
Input terminals:	0.3 Nm		
Output terminals:	0.5 Nm		
Protection degree:	IP20		
MTBF:	200 000 hours minimum, full load at 25°C ambient temperature		
Mounting:	DIN rail EN 60715		
Dimensions:	90 x 35 x 58 mm	90 x 52.5 x 58 mm	90 x 70 x 58 mm
Weight:	120 g	190 g	270 g
Standards:	IEC60950-1, UL508, TUV EN61558-2-16		

\* The stated values are valid for the full load from the source



Description

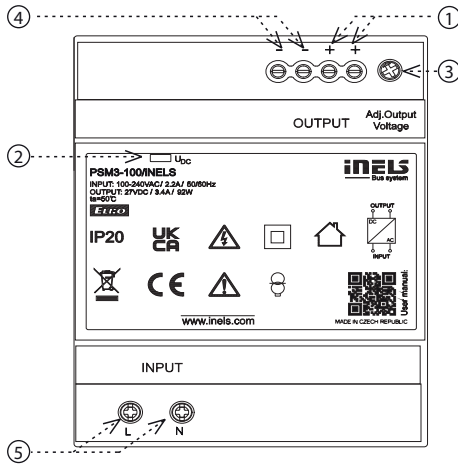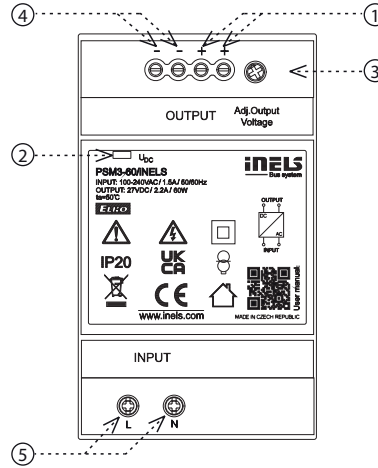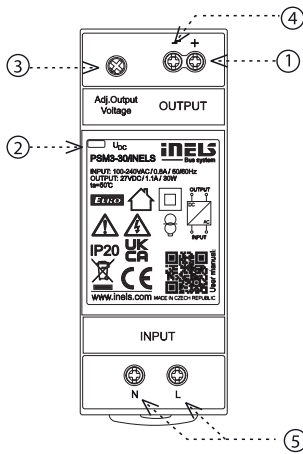


1. Output voltage terminals ⊕
2. Output voltage indication
3. Adjusting the output voltage
4. Output voltage terminals ⊖
5. Supply terminals

Connection

PSM3-30/iNELS


DC 27 V / 1.1 A



AC 100 - 240 V  
50 Hz / 60 Hz

PSM3-60/iNELS


DC 27 V / 2.2 A



AC 100 - 240 V  
50 Hz / 60 Hz

PSM3-100/iNELS

DC 27 V / 3.4 A



AC 100 - 240 V  
50 Hz / 60 Hz

Power supplies PSxM are overcurrent protection devices, because it turns power supplies off, if the output current exceeds more than 30 % of the rated output of the power supply. Therefore, these units are not intended to supply e.g. halogen lamps, because the starting / inrush current (in the cold state) is approximately ten times the amount of the steady-state operating current. So these power supplies cannot turn on such lamps.




EAN code  
EMDC-64M: 8595188150309

Technical parameters		EMDC-64M
<b>Power supply</b>		
Supply voltage/tolerance/	AC 230 V (50 - 60 Hz)/	
Rated current:	-15/+10 %/max. 100 mA	
DALI power supply:	16 V, 250 mA	
Dissipated power:	max. 3 W	
<b>Communication</b>		
Input interface:	EBM BUS (RS485 communication)	
Output interface:	DALI (max. 64 ballasts) DMX (max. 32 receivers, with repeater up to 64)	
<b>Indication</b>		
Power supply:	green LED Un	
Error surge or short DALI:	illuminated red LED ERR	
Indication of unit status:	LED DALI/DMX (see iNELS installation handbook)	
<b>Operating conditions</b>		
Relative humidity:	max. 80 %	
Operating temperature:	-20 °C to +55 °C	
Storage temperature:	-30 °C to +70 °C	
Protection degree:	IP20 device, IP40 mounting in the switchboard	
Control device purpose:	operating control device	
Control device construction:	individual control device	
Characteristic of automatic action:	2.5 kV	
Overvoltage category:	II.	
Pollution degree:	2	
Operating position:	vertical	
Installation:	into switchboard on DIN rail EN60715	
Implementation:	3-MODULE	
<b>Dimension and weight</b>		
Dimension:	90 x 52 x 65 mm	
Weight:	140 g	

- The unit EMDC-64M is designed to control DALI electronic ballasts and DMX receivers from the iNELS system.
- EMDC-64M enables control of up to 64 independent electronic ballasts DALI (Digital Addressable Lighting Interface) for fluorescent lamps, LEDs and other light sources.
- EMDC-64M also enables connection of up to 64 DMX receivers (Digital MultipleX).
- Control from iNELS BUS System via EBM BUS.
- DIP switches on the front panel to select the control interface (DALI/DMX).
- Addressing of DALI ballast units can be done via the central unit and iDM3.
- The required functionality is set in user project in iDM3 software.
- The unit EMDC-64M is powered from the mains voltage 230 V AC.
- DALI BUS power supply is 16 V/250 mA via an EMDC-64M unit.
- The system BUS EBM is galvanically separated from the BUSes DALI/DMX. Terminals for connecting the DALI BUS are equipped with short circuit and surge protection.
- If this concerns the last unit on a system BUS EBM, it is necessary to terminate the wire with a resistor with nominal resistance of 120 Ω. The resistor is inside the unit, termination is made by shorting neighboring terminals TERM and EBM+.
- The BUS DMX must be terminated at its end by a resistor with nominal resistive value 120 Ω. The resistor for DMX BUS termination is on the side of the EMDC-64M inside the unit, termination is performed by shorting adjacent terminals TERM and A.
- Updating the firmware of the EMDC-64M can be done through the central unit and software iDM3.
- When configuring DALI addresses two types are necessary to distinguish:
  - MASTER - this group includes sensors and detectors and one DALI branch can connect up to 4 DALI MASTER units
    - lighting intensity sensor DLS3-1
    - motion detector DMD3-1
  - SLAVE - electronic lighting ballast
- EMDC-64M in 3-MODULE design is designed for mounting in a control panel on a DIN rail EN60715.

## Connection

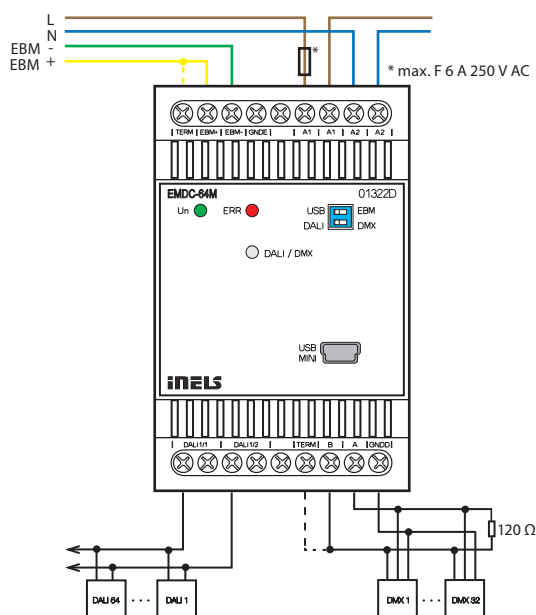




EAN code  
MCD3-01: 8595188191234

Technical parameters		MCD3-01
<b>Inputs</b>		
HF system:	5.8 GHz CW radar, ISM band	
Detection angle:	360°	
Reach:	2-10 m (radius.), adjustable	
Time setting:	in iDM software	
Recommended installation height:	2.5 - 3 m	
Changing the sensitivity:	yes (in hardware)	
Light metering:	yes (in hardware)	
<b>Communication</b>		
Terminals:	0.3 - 0.8 mm <sup>2</sup>	
Interface:	installation iNELS BUS	
<b>Power supply</b>		
From iNELS BUS:	27 V DC, -20/+10 %, 20 mA	
<b>Operating conditions</b>		
Work temperature:	-10 to 40 °C	
Operation position:	free	
Installation:	ceiling/surface	
<b>Dimension and weight</b>		
Dimension:	115 x 24 mm	

- The MCD3-01 is a highly versatile and compact motion sensor designed for ceiling or surface mounting applications. With its ultra-slim design, the MCD3-01 seamlessly integrates into various environments, providing reliable and efficient motion detection capabilities.
- The sensor is powered by a 27 VDC power source, specifically the iNELS BUS system, ensuring stable and efficient operation.
- The MCD3-01 utilizes a 5.8 GHz continuous wave (CW) radar system operating in the ISM band, offering precise and reliable motion detection.
- The sensor provides a wide 360-degree detection angle, ensuring comprehensive coverage of the monitored area.
- The sensor's reach is adjustable, allowing the user to set the detection range. The reach can be configured within the range of 2 to 10 meters in radius, providing flexibility for different applications.
- The MCD3-01 features a software setting for adjusting time settings. The time setting can be configured, allowing customization of the sensor's activation duration.
- Designed to operate effectively in various environmental conditions, the sensor has a wide working temperature range of -10°C to +40°C, ensuring reliable performance in different settings.
- The MCD3-01 can be seamlessly integrated and combined with other iNELS units using the iDM3 software. This allows for the implementation of additional logics and functions, enabling automation and customized control scenarios based on specific requirements.
- The MCD3-01 features a compact form factor with dimensions of 115 x 24 mm, facilitating easy installation and integration into different ceiling or surface mounting applications.



Connection

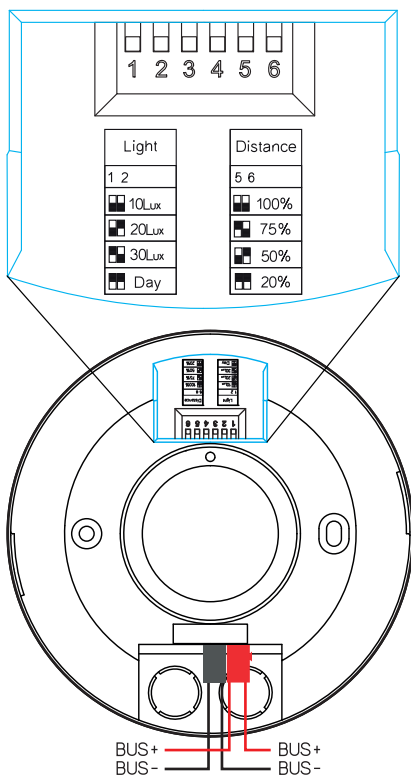




EAN code  
PMS3-01: 8595188191357

Technical parameters		PMS3-01
<b>Inputs</b>		
Detection angle:		360°
Time setting:		in iDM software
Recommended installation height:		2.5 - 3.5 m
Luminance control:		yes (in hardware)
<b>Communication</b>		
Terminals:		0.3 - 0.8 mm <sup>2</sup>
Interface:		installation iNELS BUS
<b>Power supply</b>		
From iNELS BUS:		27 V DC, -20/+10 %, 20 mA
<b>Operating conditions</b>		
Work temperature:		-10 to 40 °C
Operation position:		free
Installation:		ceiling/surface
<b>Dimension and weight</b>		
Dimension:		115 x 24 mm

#### Connection

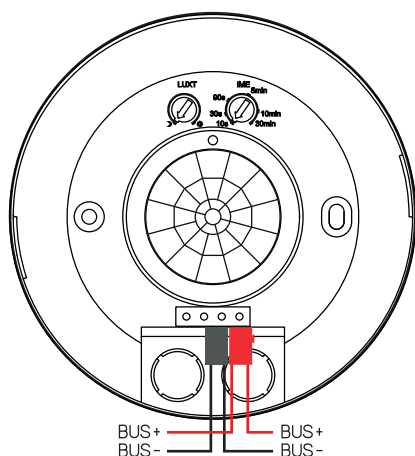

- The PMS3-01 is a highly versatile and compact motion sensor designed for ceiling or surface mounting applications. With its ultra-slim design, the PMS3-01 seamlessly integrates into various environments, providing reliable and efficient motion detection capabilities.
- The sensor is powered by a 27 VDC power source, specifically the iNELS BUS system, ensuring stable and efficient operation.
- The PMS3-01 utilizes an infrared for precise and reliable motion detection.
- The sensor provides a wide 360-degree detection angle, ensuring comprehensive coverage of the monitored area.
- The sensor's reach is up to 6m max, allowing the user to install the unit at a height of 2.5 m-3.5 m, providing flexibility for different applications.
- The PMS3-01 features a software setting for adjusting time settings. The time setting can be configured, allowing customization of the sensor's activation duration.
- Designed to operate effectively in various environmental conditions, the sensor has a wide working temperature range of -10°C to +40°C, ensuring reliable performance in different settings.
- The PMS3-01 can be seamlessly integrated and combined with other iNELS units using the iDM3 software. This allows for the implementation of additional logics and functions, enabling automation and customized control scenarios based on specific requirements.
- The PMS3-01 features a compact form factor with dimensions of 115 x 24 mm, facilitating easy installation and integration into different ceiling or surface mounting applications.






EAN code  
DLS3-1: 8595188157506

Technical parameters		DLS3-1
<b>Inputs</b>		
Range of measurement of lighting:	1 - 100 000 lx	
Detection angle:	40 °	
<b>Outputs</b>		
Indication red LED:	identification DALI MASTER/setting indication	
Indication green LED RUN:	communications/unit status	
<b>Communication</b>		
Interface:	installation iNELS BUS, DALI	
<b>Power supply</b>		
From iNELS BUS:	27 V DC, -20/+10 %	
Rated current:	12 mA (27 V DC)	
From DALI BUS:	16 V (max. 23 V)	
Rated current:	20 mA (16 V DC)	
Dissipated power:	max. 0.5 W	
<b>Connection</b>		
Terminals:	max. 1x2.5, max. 2x1.5/with sleeve max. 1x2.5 mm <sup>2</sup>	
<b>Operating conditions</b>		
Operating temperature:	-30 to +60 °C	
Storing temperature:	-30 to +70 °C	
Protection degree:	IP65	
Operating position:	vertical	
<b>Dimension and weight</b>		
Dimension:	96 x 62 x 34 mm	
Weight:	100 g	

For proper function of the detector it is necessary to eliminate all sources of light interference in the sensing area.

- The luminescence sensor DLS3-1 is for sensing the current luminescence at the point of installation of the unit.
- The DLS3-1 sensor is equipped with two communication interfaces:
  - iNELS BUS installation
  - DALI (a maximum 4 pcs of DMD3-1 or DLS3-1 units can be used on one DALI bus).
- Information about the current value of the light intensity can be used in tasks of maintaining constant luminescence. In space where it is possible, thanks to the contribution of natural light from the outside to adjust the artificial light, which can reduce energy consumption.
- Thanks to the DLS3-1 units cannot only be used in residential projects, but also in commercial projects, offices or manufacturing plants, warehouses.
- The DLS3-1 unit is recommended to be installed so that the luminescence sensor for sensing faces down and should not be exposed to direct radiation.
- Setting up a communication interface with DIP switches no. 1:
  - in the upper position determines the communication interface DALI
  - in the lower position determines the communication interface iNELS.
- The DLS3-1 detector is powered directly via the iNELS BUS installation (nominal 27 V DC) or DALI BUS (nominal 16 V DC).
- The unit can be configured via iNELS3 Designer & Manager software, which, amongst other things it is possible to:
  - Set the desired functions according to the detected illumination.
  - The sensing range is 1-100 000 lux.
  - The DLS3-1 unit is supplied in IP65 and so can be installed in the outdoor environment.

**Connection**

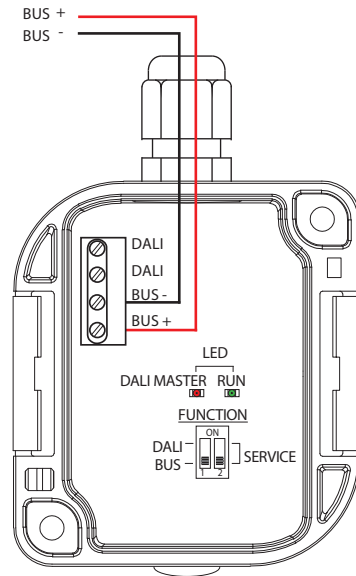





EAN code  
ADC3-60M: 8595188133012


Technical parameters		ADC3-60M
<b>Input</b>		
Analog inputs:	6x voltage, current or temperature input	
Number of inputs:	6	
Galv. separation from inner circuits:	no	
Diagnostic:	indication (exceeding the range, interruption of a sensor or overload of Uref output) by the applicable red LED	
Common terminal:	COM	
Converter resolution:	14 bits	
Input resistance		
- for voltage ranges:	approx. 150 k $\Omega$	
- for current ranges:	100 $\Omega$	
Types of inputs/measuring ranges*:	<b>Voltage (U):</b> 0 ÷ +10 V (U) ; 0 ÷ +2 V (U) <b>Current (I) :</b> 0 ÷ +20 mA (I) ; 4 ÷ +20 mA (I) <b>temperature:</b> input at ext. temperature sensor TC, TZ see accessories/according to used sensor from -40 °C to 125 °C	
<b>Outputs of the Uref1 and Uref2 voltage</b>		
Voltage**/current of Uref1:	10 or 15 V DC/100 mA	
Voltage**/current of Uref2:	10 V DC/20 mA	
<b>Communication</b>		
Installation BUS:	BUS	
Unit status indication:	green LED RUN	
<b>Power supply</b>		
Supply voltage/tolerance:	27 V DC, -20/+10 %	
Dissipated power:	max. 1 W	
Rated current:	100 mA (at 27 V DC), from BUS	
<b>Connection</b>		
Terminal:	max. 2.5 mm <sup>2</sup> /1.5 mm <sup>2</sup> with sleeve	
<b>Operating conditions</b>		
Operating temperature:	-20 to +55 °C	
Storing temperature:	-30 to +70 °C	
Protection degree:	IP20 device, IP40 mounting in the switchboard	
Overvoltage category:	II.	
Pollution degree:	2	
Operating position:	any	
Installation:	into a switchboard rail to DIN EN 60715	
Design:	3-MODULE	
<b>Dimensions and weight</b>		
Dimensions:	90 x 52 x 65 mm	
Weight:	112 g	

\* selectable for each input/output individually by configuration in the user program iDM3. Min. supply voltage 24 V DC must be respected when configuring 15 V DC and 100 mA consumption.

\*\* according to load Uref output.

- ADC3-60M is an analog-to-digital converter and is equipped with 6 analog inputs.
- Analog inputs serve to connect temperature sensors or analog sensors that generates current or voltage signal.
- The analog inputs have a resolution of a 14-bit AD converter.
- The analog inputs have a common terminal COM.
- Analog inputs/outputs are configurable in iDM3 independently as voltage (U) or current (I) or temperature.
- We recommend Clima sensor as a meteo station. There are four types: five to eight outputs. The top series offers measuring of: rainfall, brightness, twilight, speed of wind, temperature and relative humidity.
- The red LEDs in the front panel indicate exceeding the range, interruption of a sensor or overload of Uref output.
- The temperature inputs at the top of the terminal are used to connect the following temperature sensors: TC, TZ.
- ADC3-60M in 3-MODULE version is designed for mounting into a switchboard, on a DIN rail EN60715.

### Connection

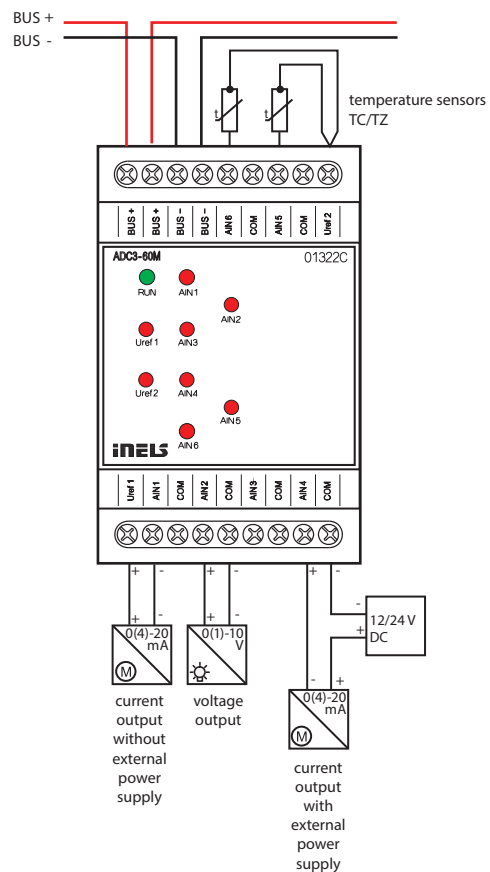




EAN code  
DAC3-04M: 8595188132565


**Technical parameters** **DAC3-04M**

Input	
Temperature measuring:	yes, input for external temperature sensor TC/TZ
Range/accuracy of temp. measuring:	-20 to +120 °C; 0.5 °C from the range
Outputs	
Analog voltage output/rated current:	4x 0(1)-10 V/10 mA
Indication of output overload:	red LED OVERLOAD
Communication	
Installation BUS:	BUS
Status indication unit:	green LED RUN
Power supply	
Supply voltage/tolerance:	27 V DC, -20/+10 %
Dissipated power:	max. 1 W
Rated current:	50 mA (at 27 V DC), from BUS
Connection	
Terminal:	max. 2.5 mm <sup>2</sup> /1.5 mm <sup>2</sup> with sleeve
Operating conditions	
Air humidity:	max. 80 %
Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20 device, IP40 mounting in the switchboard
Overvoltage category:	II.
Pollution degree:	2
Operating position:	any
Installation:	switchboard on DIN rail EN 60715
Design:	3-MODULE
Dimensions and weight	
Dimensions:	90 x 52 x 65 mm
Weight:	108 g

- DAC3-04M is a converter from a digital signal to an analog voltage signal.
- The converter generates 4 analog voltage signals, which can be operated, according to type of controlled device, in a range 0-10 V or 1-10 V.
- This is used for regulating and controlling devices that may be controlled by this signal (dimnable ballasts of fluorescent lamps and other types of light sources - e.g. LED panels from the assortment of ELKO Lighting, dimming actuator for LED and RGB strips RFDA-73M/RGB, thermo drives, servo drives, elements for measuring and regulation and others).
- Range of output voltage is adjustable in iDM3.
- Converter is equipped with a temperature input for connecting a 2-wire external sensor TC/TZ (see accessories).
- DAC3-04M in 3-MODULE version is designed for mounting into a switchboard, on DIN rail EN60715.

**Connection**

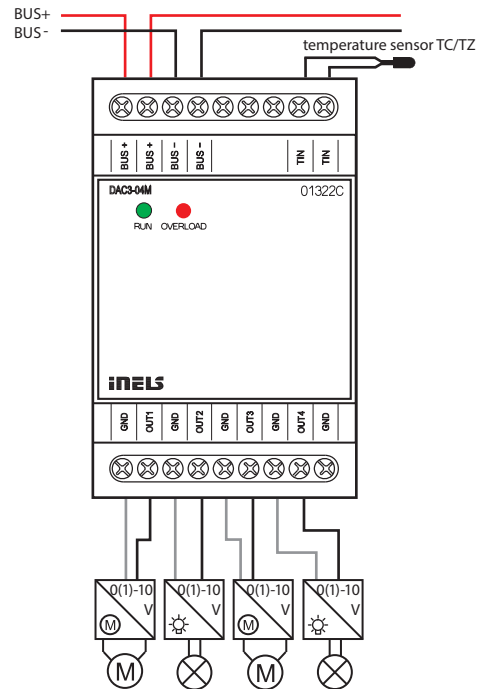

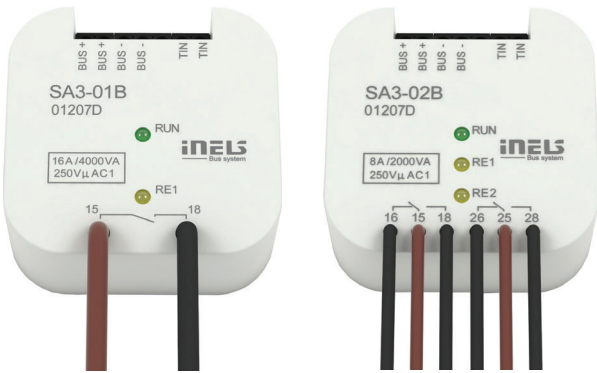


EAN code  
SA3-01B: 8595188132350  
SA3-02B: 8595188132367

Technical parameters	SA3-01B	SA3-02B
<b>Inputs</b>		
Temperature measuring:	Yes, input for external thermo sensor TC, TZ	
Scope and accuracy of tem.meas.:	-20 to +120°C; 0.5°C from the range	
<b>Outputs</b>		
Output:	1x switching 16 A/AC1	2x changeover 8 A/AC1
Switching voltage:	250 V AC, 24 V DC	
Switched load:	4000 VA/AC1, 384 W/DC	2000 VA/AC1, 192 W/DC
Surge current:	30 A; max. 4 s. when repeating 10%	10 A
Output relays separated from all internal circuits:	reinforced insulation (Cat. II surges by EN 60664-1)	
Insulation voltage between relay outputs RE1-RE2:	x	basic isolation (Cat. II surges by EN 60664-1)
Minimal switching current:	100 mA/5 V	
Switching frequency/no load:	1200 min <sup>-1</sup>	300 min <sup>-1</sup>
Switching frequency/rated load:	6 min <sup>-1</sup>	15 min <sup>-1</sup>
Mechanical lifetime:	3x 10 <sup>7</sup>	1x 10 <sup>7</sup>
Electrical lifetime for AC1:	0.7x 10 <sup>5</sup>	1x 10 <sup>5</sup>
Output indication:	yellow LED	2x yellow LED
<b>Communication</b>		
Installation BUS:	BUS	
<b>Power supply</b>		
Supply voltage/tolerance:	27 V DC, -20/+10 %	
Dissipated power:	max. 4 W	
Rated current:	30 mA (at 27 V DC)	50 mA (at 27 V DC)
Status indication unit:	green LED RUN	
<b>Connection</b>		
Data terminals:	terminal, 0.5 - 1 mm <sup>2</sup>	
Power outputs:	2x conduct. CY, Ø 2.5 mm <sup>2</sup>	6x conduct. CY, Ø 0.75 mm <sup>2</sup>
<b>Operating conditions</b>		
Operating temperature:	-20 to +55 °C	
Storage temperature:	-30 to +70 °C	
Protection degree:	IP30	
Overvoltage category:	II.	
Pollution degree:	2	
Operating position:	any	
Installation:	into installation box	
<b>Dimensions and weight</b>		
Dimensions:	49 x 49 x 21 mm	
Weight:	50 g	50 g


- Actuators are designed for switching of one (SA3-01B), respectively two (SA3-02B) of various appliances and loads by relay outputs (potentialless contacts).
- SA3-01B contains 1 relay with switching potentialless contact with max. load 16 A/4000 VA/AC1.
- SA3-02B contains 2 relays with switching potentialless contacts with max. load 8 A/2000 VA/AC1.
- Output contacts are separately controllable and addressable.
- Thanks to changeover contacts, the SA3-02B actuator can be used to control a 230 V drive (such as blinds, shutters or awnings), whereas by proper bridging of contacts, it is possible to secure locking hardware options while switching on phase two outputs.
- Actuators are equipped with a temperature input for connecting an external two-wire temperature sensor TC/TZ (see accessories).
- LED on front panel signalizes state of each output.
- SA3 is normally supplied in the option AgSnO<sub>2</sub> contact material.
- SA3-01B, SA3-02B are designed for mounting into the installation box.

**Connection**

SA3-01B

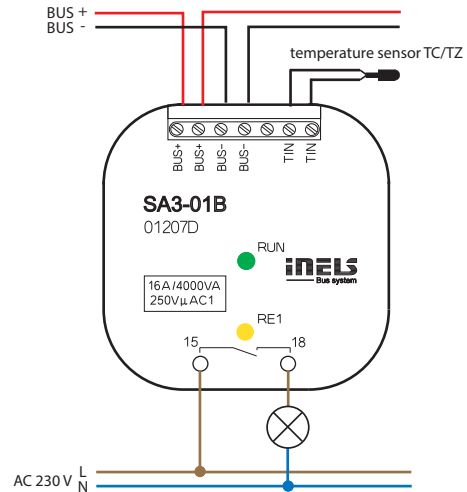

SA3-02B

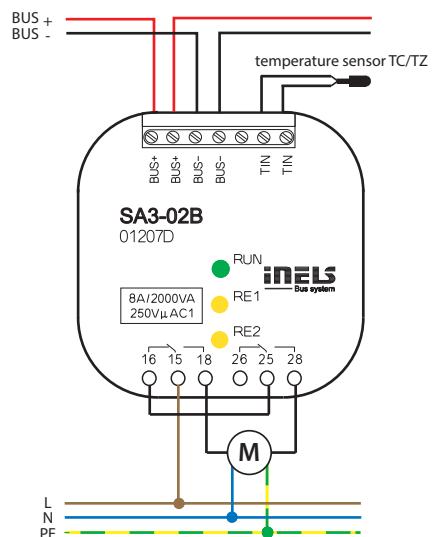



EAN code  
SA3-04M: 8595188132381

**Technical parameters** SA3-04M

Outputs	
Output:	4x changeover 16 A/AC1
Switching voltage:	250 V AC, 24 V DC
Switching output:	4000 VA/AC1, 384 W/DC
Surge current:	30 A; max. 4 s. at 10% duty cycle
Output relays separated from all internal circuits:	reinforced insulation (Cat. II surges by EN 60664-1)
Isolation between relay outputs RE1-3 and RE4:	reinforced insulation (Cat. II surges by EN 60664-1)
Isolation between relay outputs RE1-3:	basic insulated (Cat. II surges by EN 60664-1)
Isolates. voltage open relay contact:	1 kV
Min. switched current:	100 mA
Switching frequency/no load:	1200 min <sup>-1</sup>
Switching frequency/rated load:	6 min <sup>-1</sup>
Mechanical life:	3x 10 <sup>7</sup>
Electrical life AC1:	0.7x 10 <sup>5</sup>
Output indication:	4x yellow LED

**Communication**

Installation BUS:	BUS
-------------------	-----

**Power supply**

Supply voltage/tolerance:	27 V DC, -20/+10 %
Dissipated power:	max. 4 W
Rated current:	70 mA (at 27 V DC), from BUS
Status indication unit:	green LED RUN

**Connection**

Terminal:	max. 2.5 mm <sup>2</sup> /1.5 mm <sup>2</sup> with sleeve
-----------	-----------------------------------------------------------

**Operating conditions**


Air humidity:	max. 80 %
Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20 device, IP40 mounting in the switchboard
Overvoltage category:	II.
Pollution degree:	2
Operation position:	any
Installation:	switchboard on DIN rail EN 60715
Design:	3-MODULE

**Dimensions and weight**

Dimensions:	90 x 52 x 65 mm
Weight:	164 g

- SA3-04M is a switching actuator containing 4 independent relays with changeover potential-free contacts.
- Maximum load per contact is 16 A/4000 VA/AC1.
- Each of the outputs contacts are individually controllable and addressable.
- All four relays are individually decorated input terminals, and therefore can switch various independent potentials.
- The actuator is designed for switching 4 various appliances or loads by relay outputs (potential free contacts).
- Thanks to changeover contacts, it can be used to control up to two drives 230 V power (such as blinds, shutters or awnings) with appropriate bridging, the contacts can secure hardware blocking the possibility of simultaneous switching of the phase on both outputs, see example of connection.
- LEDs on the front panel signal the status of each output.
- Contact status of each relay can be changed separately and manually by control buttons on a front panel.
- Switching actuators SA3 is normally supplied in the option AgSnO<sub>2</sub> contact material.
- SA3-04M in 3-MODULE version is designed for mounting into a switchboard, on DIN rail EN60715.

**Connection**

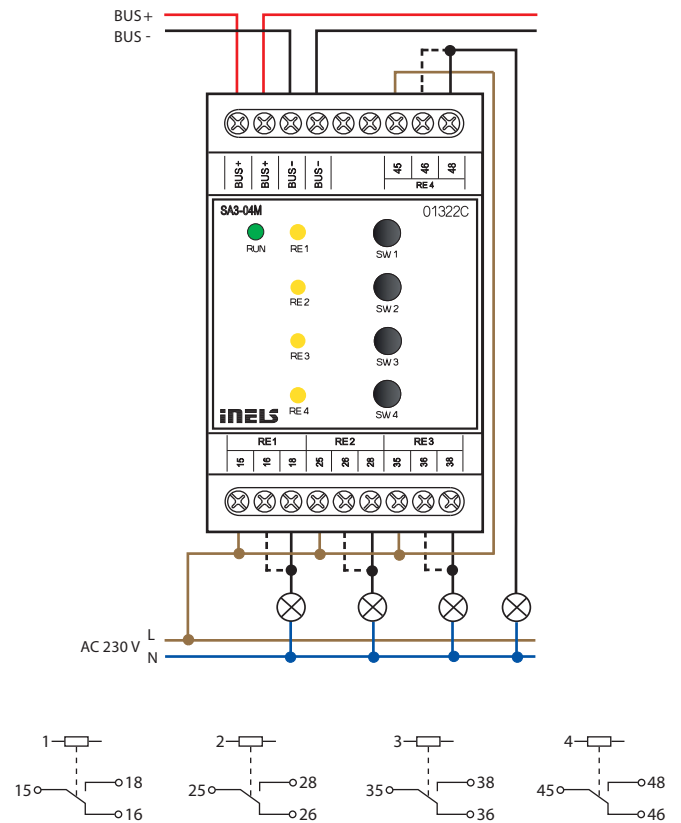



EAN code  
SA3-06M: 8595188132879

### Technical parameters

### SA3-06M

#### Outputs

Output:	6x changeover 8 A/AC1
Switching voltage:	250 V AC, 24 V DC
Switching output:	2000 VA/AC1, 192 W/DC
Surge current:	10 A
Output relays separated from all internal circuits:	reinforced insulation (Cat. II surges by EN 60664-1)
Isolation between relay outputs COM1 and COM2:	reinforced insulation (Cat. II surges by EN 60664-1)
Isolation between individual relay outputs:	basic insulated (Cat. II surges by EN 60664-1)
Isolates voltage open relay contact:	1 kV
Max. current terminals COM1 and COM2:	16 A
Min. switched current:	100 mA/5 V DC
Switching frequency/no load:	300 min <sup>-1</sup>
Switching frequency/rated load:	15 min <sup>-1</sup>
Mechanical life:	2x 10 <sup>7</sup>
Electrical life AC1:	5x 10 <sup>4</sup>
Output indication:	6x yellow LED

#### Communication

Installation BUS:	BUS
-------------------	-----

#### Power supply

Supply voltage/tolerance:	27 V DC, -20/+10 %
Dissipated power:	max. 9 W
Rated current:	60 mA (at 27 V DC), from BUS
Status indication unit:	green LED RUN

#### Connection

Terminal:	max. 2.5 mm <sup>2</sup> /1.5 mm <sup>2</sup> with sleeve
-----------	-----------------------------------------------------------

#### Operating conditions


Air humidity:	max. 80%
Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20 device, IP40 mounting in the switchboard
Overvoltage category:	II.
Pollution degree:	2
Operation position:	any
Installation:	switchboard on DIN rail EN 60715
Design:	3-MODULE

#### Dimensions and weight

Dimensions:	90 x 52 x 65 mm
Weight:	160 g

- The actuator is designed for switching up to six various appliances and loads with potentialless contact.
- SA3-06M is a switching actuator contains 6 independent relays with changeover potentialless contacts.
- Maximum load per contact is 8 A/2000 VA/AC1.
- Each of six output contacts are individually controllable and addressable.
- The relays are divided into two groups, the group of four relays on the bottom terminal switches the common potential, a pair of relays on top of the terminal switches the second common potential.
- The actuator is suitable for operating discontinuously controlled thermo drives in the distributor of floor heating.
- LEDs on the front panel signals the status of each output.
- Contact status of each relay can be changed separately and manually by control buttons on a front panel.
- SA3-06M is normally supplied in the option AgSnO<sub>2</sub> contact material.
- SA3-06M in 3-MODULE version is designed for mounting into a switchboard/DIN rail EN60715.

#### Connection

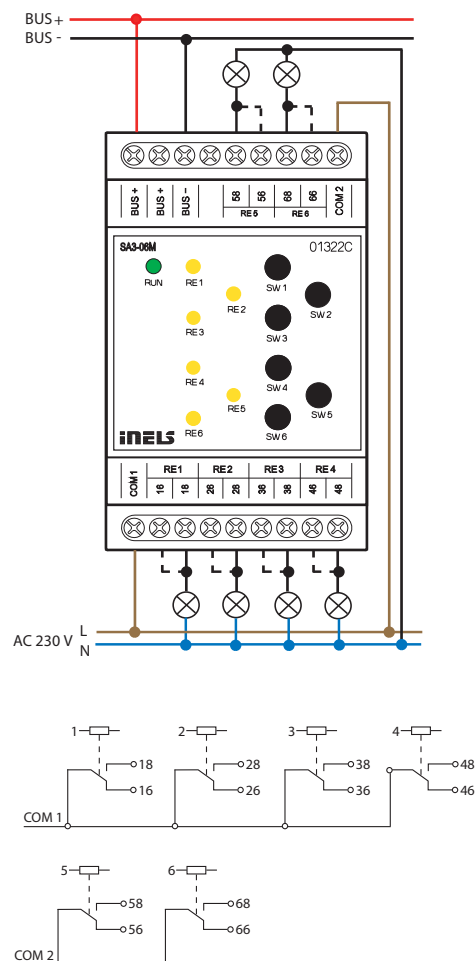







EAN code  
SA3-014M: 8595188191241  
SA3-014M/E: 8595188189178

Technical parameters	SA3-014M	SA3-014M/E
<b>Outputs</b>		
Output:	14x switching 10 A/AC1	
Switched voltage:	250 V AC, 30 V DC	
Switched output:	2500 VA/AC, 150 W/DC	
Peak current:	10 A	
Output relays separated from all internal circuits:	reinforced insulation (Cat. II surges by EN 60664-1)	
Isolation between relay outputs COM 1,2 COM 3,4 COM 5,6 COM 7,8 COM 9,10 COM 11,12:	reinforced insulation (Cat. II surges by EN 60664-1)	
Isolates. voltage open relay contact:	1 kV	
Max. current of one common terminal:	12 A	
Minimal switched current:	100 mA/10 V DC	
Switching frequency without load:	300 min <sup>-1</sup>	
Switching frequency with rated load:	15 min <sup>-1</sup>	
Mechanical life:	1x 10 <sup>7</sup>	
Electrical life AC1:	1x 10 <sup>5</sup>	
Mains voltage detection:	yes (relay switching in zero)	
<b>Communication</b>		
Installation BUS:	BUS	
Status indication unit:	green LED RUN - status led for relay   only RUN LED	
<b>Power supply</b>		
Voltage of BUS/tolerance/nominal current:	27 V DC, -20/+10 %, 150 mA	
<b>Connection</b>		
Terminal:	max. 2.5 mm <sup>2</sup> /1.5 mm <sup>2</sup> with sleeve	
<b>Operating conditions</b>		
Operating temperature:	-20 to +55 °C	
Storing temperature:	-30 to +70 °C	
Protection degree:	IP20 device, IP40 mounting in the switchboard	
Overvoltage category:	II.	
Pollution degree:	2	
Operating position:	any	
Installation:	switchboard on DIN rail EN 60715	
Design:	6-MODULE	
<b>Dimensions and weight</b>		
Dimensions:	90 x 105 x 65 mm	
Weight:	310 g	

- SA3-014M is a switching actuator containing 14 independent relays with NO potentialless contacts, with the fact that switches the same potential. Maximal loadability of contacts is 10A/2500 VA/AC1.
- Each of the fourteen output contacts are individually controllable and addressable. Actuator SA3-014M is powered by an bus voltage 27V DC.
- The unit's status is indicated by the green RUN LED on the front panel - if the bus supply is connected, but there is no communication via BUS with master, the LED RUN is on continuously.
  - if the bus voltage is connected and the unit communicates by BUS, the LED RUN flashes.
- LEDs on the front panel signals the status of each output. Contact status of each relay can be changed separately and manually by control buttons on a front panel.
- The unit has synchronized closing and opening of the relay in the zero-voltage of the sinusoidal waveform. The sync inputs are COM 1, 3, 5, 7, 9, 11 and 13 against the N terminal.
- SA3-014M is normally supplied in the option AgSnO2 contact material. SA3-014M in design 6-MODULE is designed to be mounted into a switchboard, on to DIN rail EN60715.
- **SA3-014M/E comes with an economic option without manual control buttons on the front panel and status LEDs for the relay output.**

Connection (SA3-014M/E)

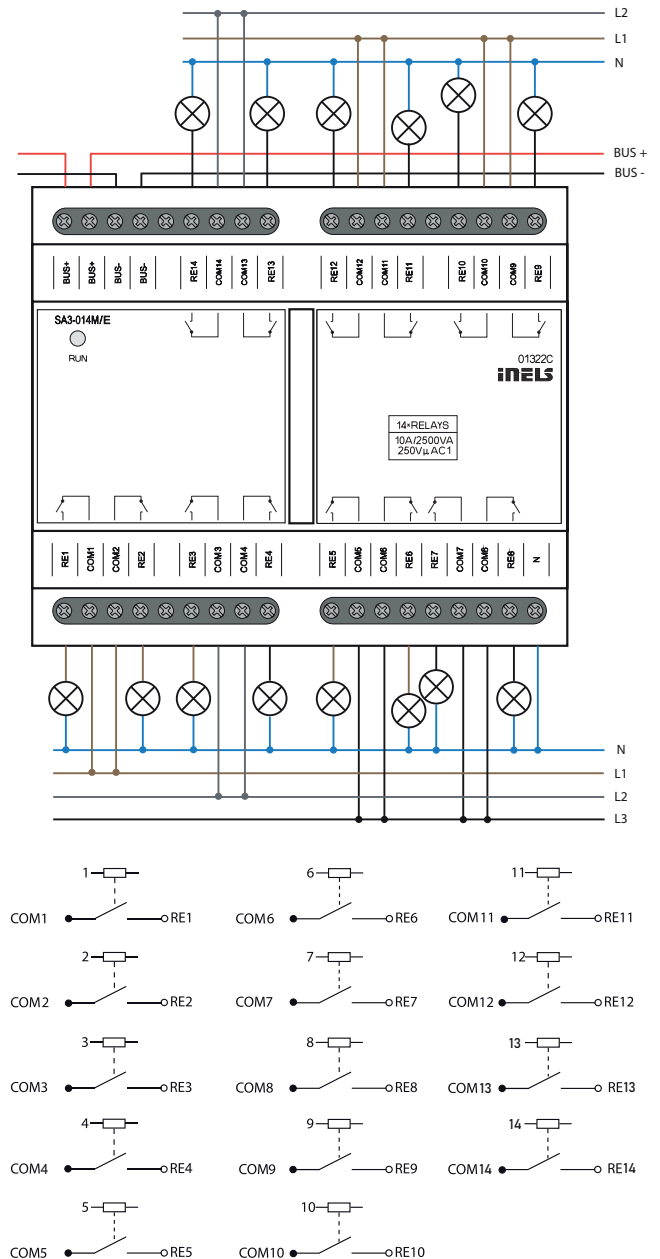

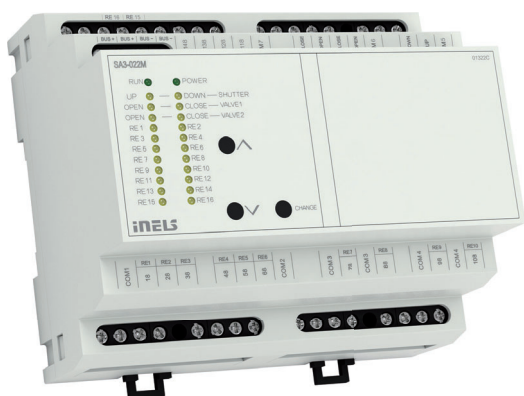

EAN code  
SA3-022M: 8595188135269

### Technical parameters


### SA3-022M


#### Outputs

Output indication:	yellow LED
Output relays separated from all internal circuits:	reinforced insulation (Cat. II surges by EN 60664-1)
Insulation between COM potentials:	reinforced insulation (Cat. II surges by EN 60664-1)
Isolates. voltage open relay contact:	1 kV
<b>SSR (Electronic Relay):</b>	4x switching (VALVE1–VALVE2)
Switching voltage:	20 - 240 V AC
Switching output:	480 VA
Surge current:	20 A, $t \leq 16$ ms
<b>Relay 6A:</b>	12x switching (RE1 - RE6, RE11 - RE16), 1x HW block changeover (OUT1, OUT2)
Switching voltage:	250 V AC, 24 V DC
Switching output:	1500 VA/AC1; 300 VA/AC15; 180 W/DC, AC3
Minimum switching load:	500 mW (12 V/10 mA)
Mechanical life:	$10 \times 10^6$
Electrical life AC1:	$6 \times 10^4$
<b>Relay 10A:</b>	4x switching (RE7 - RE10)
Switching voltage:	250 V AC, 24 V DC
Switching output:	2500 VA/AC1, 240 W/DC
Surge current:	30 A max. 4 s at 10%
Minimal switched current:	100 mA
Switching frequency without load:	$1200 \text{ min}^{-1}$
Switching frequency with rated load:	$6 \text{ min}^{-1}$
Mechanical life:	$3 \times 10^7$
Electrical life AC1:	$0.7 \times 10^5$
<b>Communication</b>	
Installation BUS:	BUS
Unit status indication:	green LED POWER
<b>Power supply</b>	
Supply voltage/tolerance:	27 V DC, -20/+10 %
Dissipated power:	max. 3 W
Rated current:	100 mA (at 27 V DC), from BUS
Power status indication:	green LED RUN
<b>Connection</b>	
Terminal:	max. 2.5 mm <sup>2</sup> /1.5 mm <sup>2</sup> with sleeve
<b>Operating conditions</b>	
Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20 device, IP40 mounting in the switchboard
Overvoltage category:	II.
Pollution degree:	2
Operating position:	any
Installation:	switchboard on DIN rail EN 60715
Design:	6-MODULE
<b>Dimensions and weight</b>	
Dimensions:	90 x 105 x 65 mm
Weight:	307 g

- Equipped with 22 relay outputs (of which 1x changeover contact – roller blinds, blinds).
- Switch lighting and socket circuits (6 A and 10 A relay) with common potential at the "COMx" terminal.
- Control of roller blinds, blinds (24 - 230 V AC/DC).
- Relay control of the fan coil unit - heating/cooling, 3 fan speeds (24 - 230 V AC/DC).
- Connection to BUS, communication with CU3.
- The front panel LEDs indicate the status of each output.
- SA3-022M in design 6-MODULE is designed to be mounted into a switchboard, onto DIN rail EN60715.

### Connection

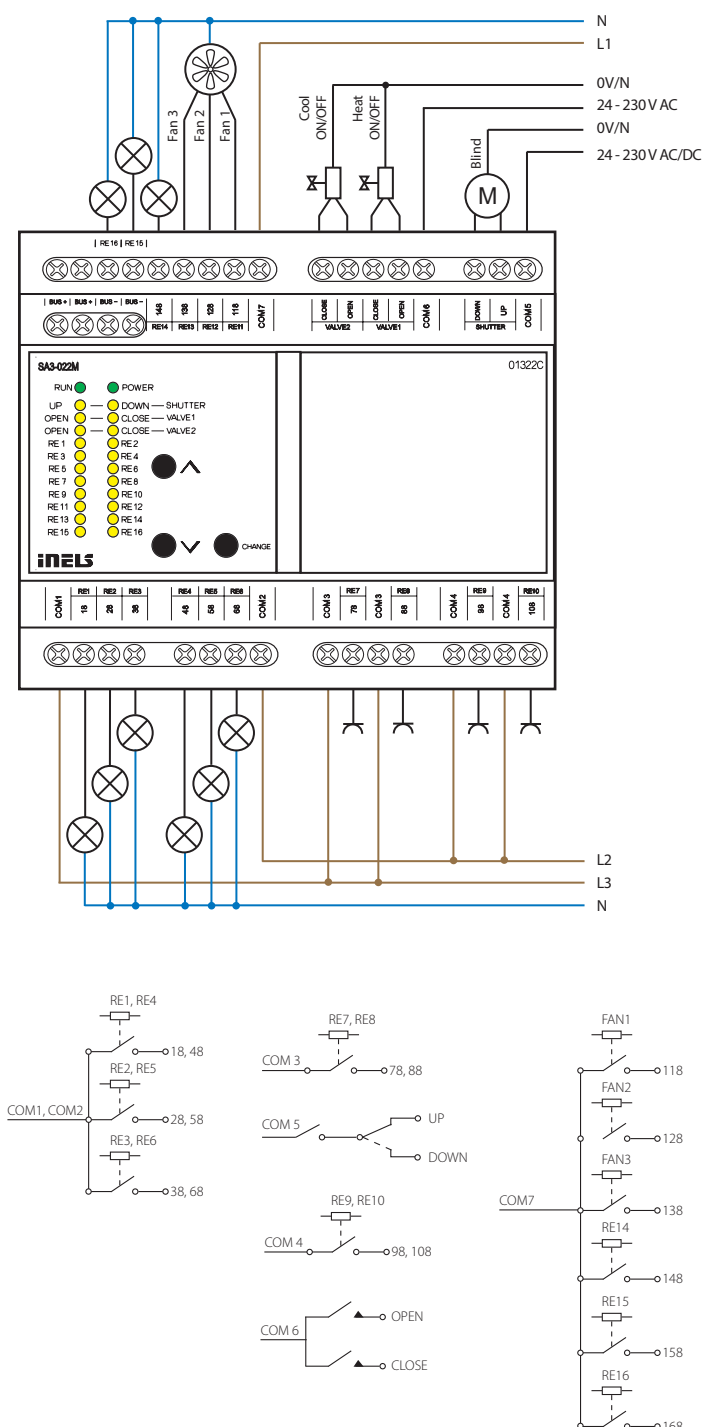

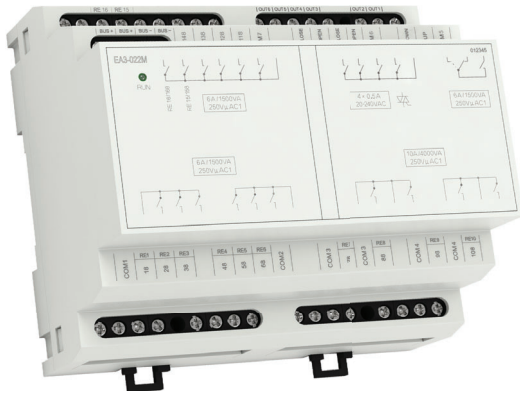


EAN code  
EA3-022M: 8595188135238

**Technical parameters** **EA3-022M**

Outputs	
Output relays separated from all internal circuits:	reinforced insulation (Cat. II surges by EN 60664-1)
Insulation between COM potentials:	reinforced insulation (Cat. II surges by EN 60664-1)
Isolates. voltage open relay contact:	1 kV
<b>SSR (Electronic Relay):</b>	4x switching (VALVE1-VALVE2)
Switching voltage:	20 - 240 V AC
Switching output:	480 VA
Surge current:	20 A, t ≤ 16 ms
<b>Relay 6 A:</b>	12x switching (RE1 - RE6, RE11 - RE16), 1x HW block changeover (OUT1, OUT2)
Switching voltage:	250 V AC, 24 V DC
Switching output:	1500 VA/AC1; 300 VA/AC15; 180 W/DC, AC3
Minimum switching load:	500 mW (12 V/10 mA)
Mechanical life:	10x10 <sup>6</sup>
Electrical life AC1:	6x10 <sup>4</sup>
<b>Relay 10 A:</b>	4x switching (RE7 - RE10)
Switching voltage:	250 V AC, 24 V DC
Switching output:	2500 VA/AC1, 240 W/DC
Surge current:	30 A max. 4 s at 10 %
Minimal switched current:	100 mA
Switching frequency without load:	1200 min <sup>-1</sup>
Switching frequency with rated load:	6 min <sup>-1</sup>
Mechanical life:	3x 10 <sup>7</sup>
Electrical life AC1:	0.7x 10 <sup>5</sup>
Communication	
Installation BUS:	BUS
Unit status indication:	green LED RUN
Power supply	
Supply voltage/tolerance:	27 V DC, -20/+10 %
Dissipated power:	max. 2 W
Rated current:	100 mA (at 27 V DC), from BUS
Connection	
Terminal:	max. 2.5 mm <sup>2</sup> /1.5 mm <sup>2</sup> with sleeve
Operating conditions	
Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20 device, IP40 mounting in the switchboard
Overvoltage category:	II.
Pollution degree:	2
Operating position:	any
Installation:	switchboard on DIN rail EN 60715
Design:	6-MODULE
Dimensions and weight	
Dimensions:	90 x 105 x 65 mm
Weight:	337 g

- Equipped with 22 relay outputs (of which 1x changeover contact – roller blinds, blinds).
- Switch lighting and socket circuits (6 A and 10 A relay) with common potential at the "COMx" terminal.
- Control of roller blinds, blinds (24 - 230 V AC/DC).
- Relay control of the fan coil unit - heating/cooling, 3 fan speeds (24 - 230 V AC/DC).
- Connection to BUS, communication with CU3.
- EA3-022M in design 6-MODULE is designed to be mounted into a switchboard, onto DIN rail EN60715.

**Connection**

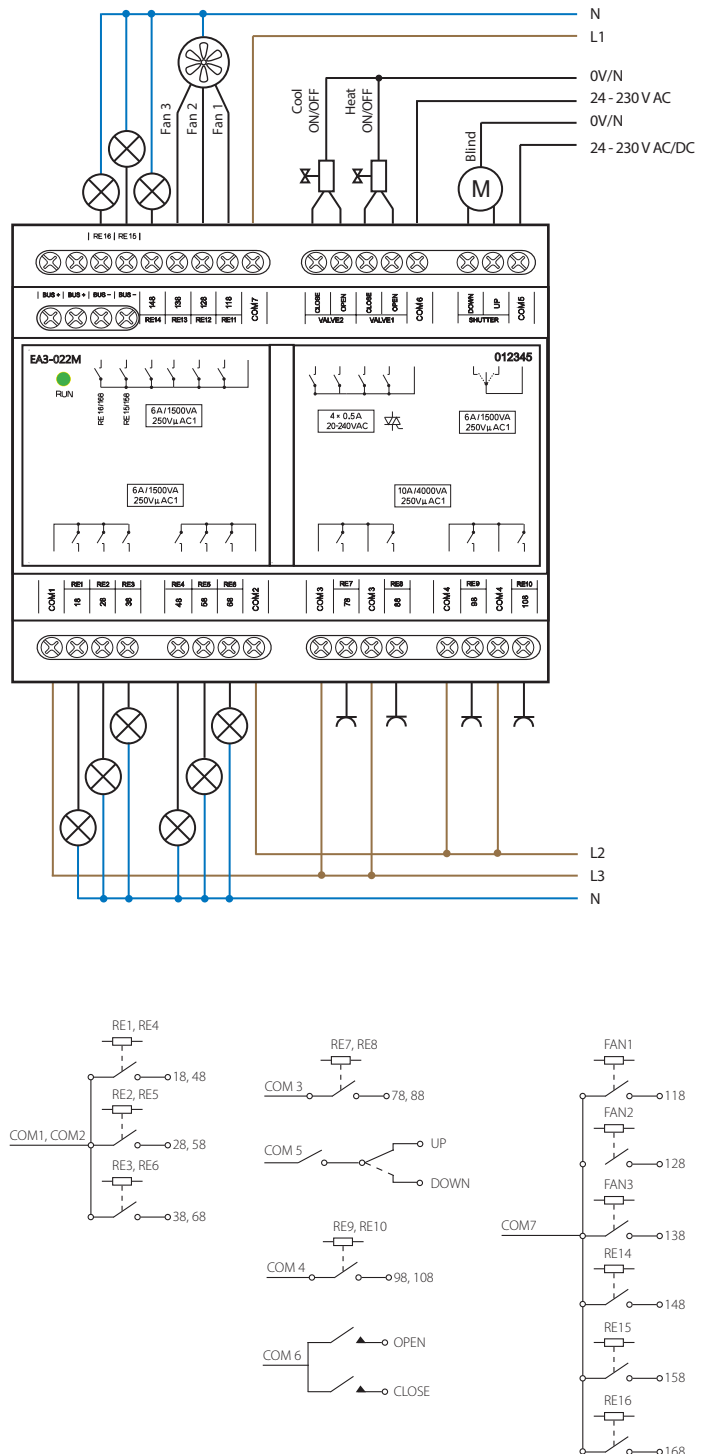



EAN code  
JA3-014M: 8595188191258  
JA3-014M/E: 8595188189491

Technical parameters	JA3-014M	JA3-014M/E
----------------------	----------	------------

### Outputs

Output:	14x switching 0.5 A/AC15
Switched voltage:	250 V AC, 30 V DC
Switched output:	125 VA/AC15
Peak current:	10 A
Output relays separated from all internal circuits:	reinforced insulation (Cat. II surges by EN 60664-1)
Isolation between relay outputs COM 1,2 COM 3,4 COM 5,6 COM 7,8 COM 9,10 COM 11,12:	reinforced insulation (Cat. II surges by EN 60664-1)
Isolates. voltage open relay contact:	1 kV
Max. current of one common terminal:	12 A
Minimal switched current:	100 mA/10 V DC
Switching frequency without load:	300 min <sup>-1</sup>
Switching frequency with rated load:	15 min <sup>-1</sup>
Mechanical life:	1x 10 <sup>7</sup>
Electrical life AC1:	1x 10 <sup>5</sup>
Mains voltage detection:	yes (relay switching in zero)

### Communication

Installation BUS:	BUS
Status indication unit:	green LED RUN - status led for relay   only RUN LED

### Power supply

Voltage of BUS/tolerance/nominal current:	27 V DC, -20/+10 %, 150 mA
-------------------------------------------	----------------------------

### Connection

Terminal:	max. 2.5 mm <sup>2</sup> /1.5 mm <sup>2</sup> with sleeve
-----------	-----------------------------------------------------------

### Operating conditions


Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20 device, IP40 mounting in the switchboard
Overvoltage category:	II.
Pollution degree:	2
Operating position:	any
Installation:	switchboard on DIN rail EN 60715
Design:	6-MODULE

### Dimensions and weight

Dimensions:	90 x 105 x 65 mm
Weight:	310 g

- JA3-014M is an actuator designed for controlling rollers, shutters, blinds, awnings, garage doors, entrance gates, etc.
- It controls electric drives that are controlled in two directions and have a built-in limit switch.
- The unit's status is indicated by the green RUN LED on the front panel
  - if the BUS voltage is connected, but there is no communication via BUS with master, the LED RUN is on continuously.
  - if the bus voltage is connected and the unit communicates by BUS, the LED RUN flashes.
- LEDs on the front panel signals the status of each output.
- Contact status of each relay can be changed separately and manually by control buttons on a front panel.
- The software blocking of output relay contacts can be secure using the iNELS Design Manager software.
- JA3-014M is normally supplied in the option AgSnO2 contact material.
- JA3-014M/E in 6-MODULE version is designed for mounting into a switchboard on DIN rail EN60715.
- **JA3-014M/E comes with an economic option without manual control buttons on the front panel and status LEDs for the relay output.**

### Connection

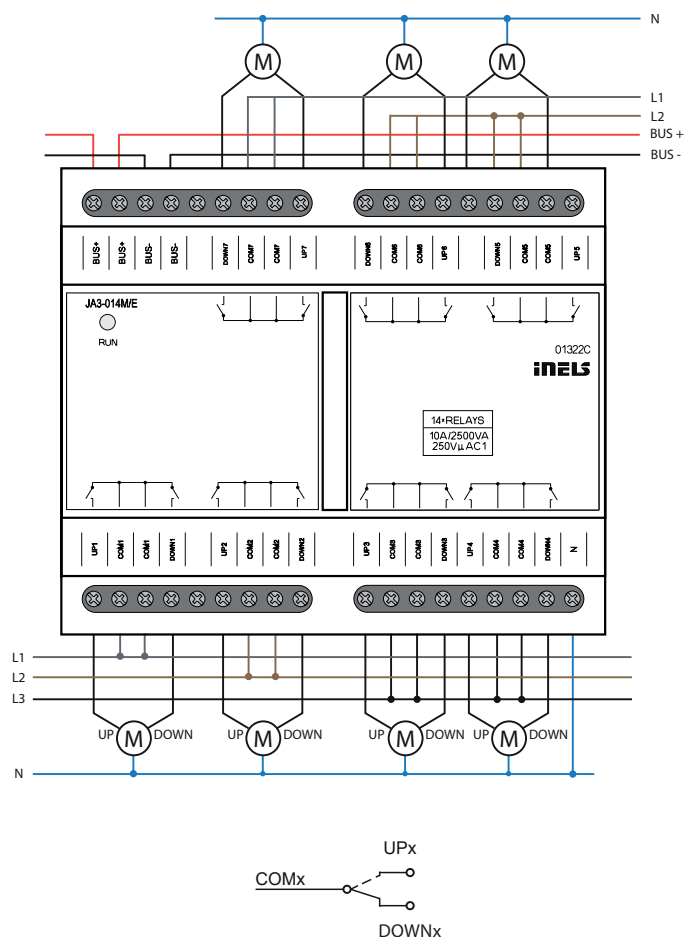







EAN code  
DA3-22M: 8595188132626  
DA3-22M/120V: 8595188133036

Technical parameters	DA3-22M	DA3-22M/120V
<b>Inputs</b>		
Input:	2x inputs, switching potential L*	
Temperature measuring:	YES, input for external thermo sensor TC/TZ	
Scope and accuracy of temp. measurement:	-20 to +120 °C; 0.5 °C from the range	
Number of control buttons:	2x buttons 4x potentiometers on front panel	
<b>Outputs</b>		
Output:	2x contactless outputs, 2x MOSFET	
Load type:	resistive, inductive, capacitive**, LED, ESL	
Isolation BUS separated from all internal circuits:	reinforced insulation (Cat. II surges by EN 60664-1)	
Isolation voltage between particular power:	max. 500 V AC	
Minimal controlled load:	10 VA	
Maximal controlled load:	400 VA for each channel	200 VA for each channel
Output indication ON/OFF:	2x yellow LED	
Device protection:	thermal/short-term overload/ long-term overload	
<b>Communication</b>		
Installation BUS:	BUS	
<b>Power supply</b>		
Supply voltage by BUS/ tolerance:	27 V DC, -20/+10 %	
Rated current:	5 mA (at 27 V DC), from BUS	
Status indication unit:	green LED RUN	
Supply voltage for power section/tolerance:	AC 230 V (50 Hz), -15/+10 %	AC 120 V (60 Hz), -15/+10 %
Dissipated power:	max. 13 W	max. 7.5 W
<b>Connection</b>		
Terminal:	max. 2.5 mm <sup>2</sup> /1.5 mm <sup>2</sup> with sleeve	
<b>Operating conditions</b>		
Air humidity:	max. 80 %	
Operating temperature:	-20 to +35 °C	
Storing temperature:	-30 to +70 °C	
Protection degree:	IP20 device, IP40 mounting in the switchboard	
Overvoltage category:	II.	
Pollution degree:	2	
Operating position:	vertical	
Installation:	switchboard on DIN rail EN 60715	
Design:	3-MODULE	
<b>Dimensions and weight</b>		
Dimensions:	90 x 52 x 65 mm	
Weight:	170 g	


\* The inputs are not galvanically isolated from the supply voltage.

\*\* **Attention:** It is not allowed to connect loads of inductive and capacitive character, at the same time.

⚠ Input is connected to the mains voltage potential.

- DA3-22M is a universal dimming 2-fold actuator enabling control of brightness intensity of dimmable light sources of the type ESL, LED and RLC with power supply 230 V.
- DA3-22M has two MOSFET controlled outputs 230 V AC, maximum load is 2x 400 VA.
- Option of connecting an external temperature sensor.
- Each output channel is independently controllable and addressable.
- Type of light source is set by a switch on the front panel.
- By setting the min. brightness potentiometer on the front panel, flashing of different types of light sources is eliminated.
- DA3-22M is equipped with two inputs 230 V AC, which can be controlled by mechanical switches (buttons, relays). Inputs are galvanically connected to potential L, which is permanently at the terminals IN1 and IN2.
- By clicking on buttons on the front panel you can manually switch on or off the corresponding output.
- Electronic overcurrent and thermal protection - switch off output in case of overload short circuit and overheating.
- The power supply (potential L) must be protected by a protective element corresponding to the power input of the connected load, e.g. a safety fuse.
- During installation, it is necessary to leave on each side of the actuator at least half the module space for better cooling.
- DA3-22M in 3-MODULE version is designed for mounting into a switchboard on DIN rail EN60715.

#### Connection

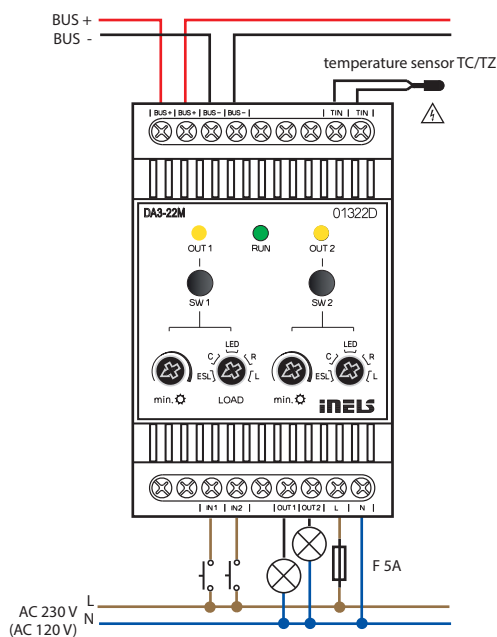

#### Types of connectable loads

type of source	symbol	description
R resistive		ordinary light bulb, halogen lamp
L inductive		coiled transformer for low-voltage halogen lamps
C capacitive		electronic transformer for low-voltage halogen lamps
LED		LED lamps and LED light sources, 230 V
ESL		dimnable energy-saving fluorescent tubes



EAN code  
 DA3-66M / 230: 8595188182065  
 DA3-66M / 120: 8595188174459

**Technical parameters**      DA3-66M/230V      DA3-66M/120V

Outputs	
Output:	6x contactless outputs, 2x MOSFET / channel
Load type: *	R-resistive, L-inductive, C-capacitive, LED, ESL - economical
Minimal controlled load:	10 VA
Maximal controlled load:	DA3-66M / 230V: 150 VA for each channel DA3-66M / 120V: 75 VA for each channel possibility of parallel connection of outputs
Output indication ON/OFF:	6x yellow LED
Device protection:	thermal/short-term overload/ long-term overload

Inputs	
Wire buttons:	6x galvanically separated
Input voltage:	20-230 AC(50-60 Hz)/DC
Isolation voltage:	between inputs max. 230 VAC/DC (basic insulation) to all other internal circuits: reinforced insulation: overvoltage category II
Maximum cable length:	10 m
Glow plug connection:	no

Communication	
Installation BUS:	BUS
Power supply	
Supply voltage by BUS/ tolerance:	27 V DC, -20/+10 %
Rated current:	100 mA (at 27 V DC), from BUS
Status indication unit:	green LED RUN
Supply voltage for power section/tolerance:	AC 230 V (50-60 Hz), -15/+10 %      AC 120 V (50-60 Hz), -15/+10 %

Connection	
Terminal:	max. 2.5 mm <sup>2</sup> /1.5 mm <sup>2</sup> with sleeve


Operating conditions	
Air humidity:	max. 80 %
Operating temperature:	-20 to +50 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20 device, IP40 mounting in the switchboard
Overvoltage category:	II.
Pollution degree:	2
Operating position:	vertical
Installation:	switchboard on DIN rail EN 60715
Design:	6-MODULE

Dimensions and weight	
Dimensions:	90 x 105 x 65 mm
Weight:	320 g

\* **Attention:** It is not allowed to connect loads of inductive and capacitive character, at the same time.

- DA3-66M is a universal dimming 6-channels actuator, which is used to control the brightness of dimmable light sources such as ESL, LED and RLC with 230 V power supply.
- The DA3-66M has 6 semiconductor controlled 230 V AC outputs. The maximum possible load is 150 VA for each channel.
- The individual outputs of the dimmer can be connected in parallel and thus increase the maximum output load at the expense of the number of outputs.
- Each output channel is independently controllable and addressable.
- By setting min. brightness, the flickering of different types of light sources is eliminated.
- Min. brightness and type of load is performed using SW IDM.
- Use the control buttons on the front panel to manually control the output.
- The actuator is equipped with electronic overcurrent and thermal protection, which switches off the output in case of overload, short circuit, over-heating.
- The dimmer has 6 galvanically separated inputs which can be used both to control the dimmer and as a binary input to the iNELS system.
- The the device supply (potential L) must be protected with a safety device corresponding to the power input of the connected load, e.g. with a quick-release fuse.
- During installation, it is necessary to leave at least half a module of free space on each side of the actuator for better cooling.
- DA3-66M is in 6-MODULE version and is intended for mounting in a switch-board on DIN rail EN60715.

**Connection**

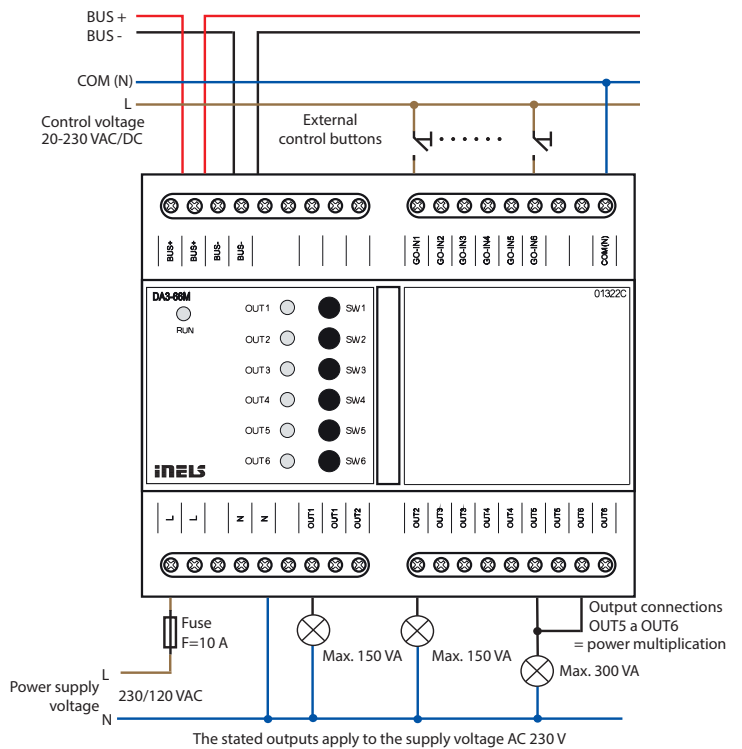

**Types of connectable loads**

type of source	symbol	description
R resistive		ordinary light bulb, halogen lamp
L inductive		coiled transformer for low-voltage halogen lamps
C capacitive		electronic transformer for low-voltage halogen lamps
LED		LED lamps and LED light sources, 230 V
ESL		dimmable energy-saving fluorescent tubes



EAN code  
DA3-03/RGBW: 8595188184632

Technical parameters		DA3-03M/RGBW
<b>Output</b>		
Dimmable load:	LED strip 12 V, 24 V, 48 V; RGBW LED strip 12 V, 24 V, 48 V	
Number of channels:	3x 4	12x 1
Surge current:	3x 15 A	12x 3,75 A
Switching voltage:	0–50 V DC stabilized	
Dimmable performance:	max. 400 W	
<b>Communication</b>		
Installation BUS:	BUS	
<b>Power supply</b>		
Supply voltage by BUS/ tolerance:	27 V DC, -20/+10 %	
Rated current:	5 mA (from 27 V DC), from BUS	
Status indication unit:	green LED RUN	
<b>Connection</b>		
Terminal:	max. 2.5 mm <sup>2</sup> /1.5 mm <sup>2</sup> with sleeve	
<b>Operating conditions</b>		
Air humidity:	max. 80 %	
Operating temperature:	-20 to +35 °C	
Storing temperature:	-30 to +70 °C	
Protection degree:	IP20 device, IP40 mounting in the switchboard	
Overvoltage category:	II.	
Pollution degree:	2	
Operating position:	vertical	
Installation:	switchboard on DIN rail EN 60715	
Design:	3-MODULE	
<b>Dimensions and weight</b>		
Dimensions:	90 x 52 x 65 mm	
Weight:	170 g	

- The dimmer for LED strips is used for independent control of 12 channels, so it can be connected to, for example:


3 RGB led strips


3 RGB led strips + 2 single colour strips

12 single colour LED strips

- The 3-module design of the device with mounting in the switchboard allows the connection of a dimmable load of 3x 15 A or 12x 3.75 A, which represents, for example: 3 pieces of RGBW LED strips 24 V 20W/m = max 18m.
- The dimmer is controlled by the central unit of the iNELS system.
- The power supply of the LED strip is in the range of 0-50V DC.
- Each of the output channels is separately controllable and addressable.
- The actuator is equipped with electronic thermal protection, which switches off the output in case of overheating.
- During installation, it is necessary to leave at least half a module of free space on each side of the actuator for better cooling.
- DA3-03M/RGBW in 3-MODUL design is intended for installation in a switchboard on an EN60715 DIN rail.

### Connection

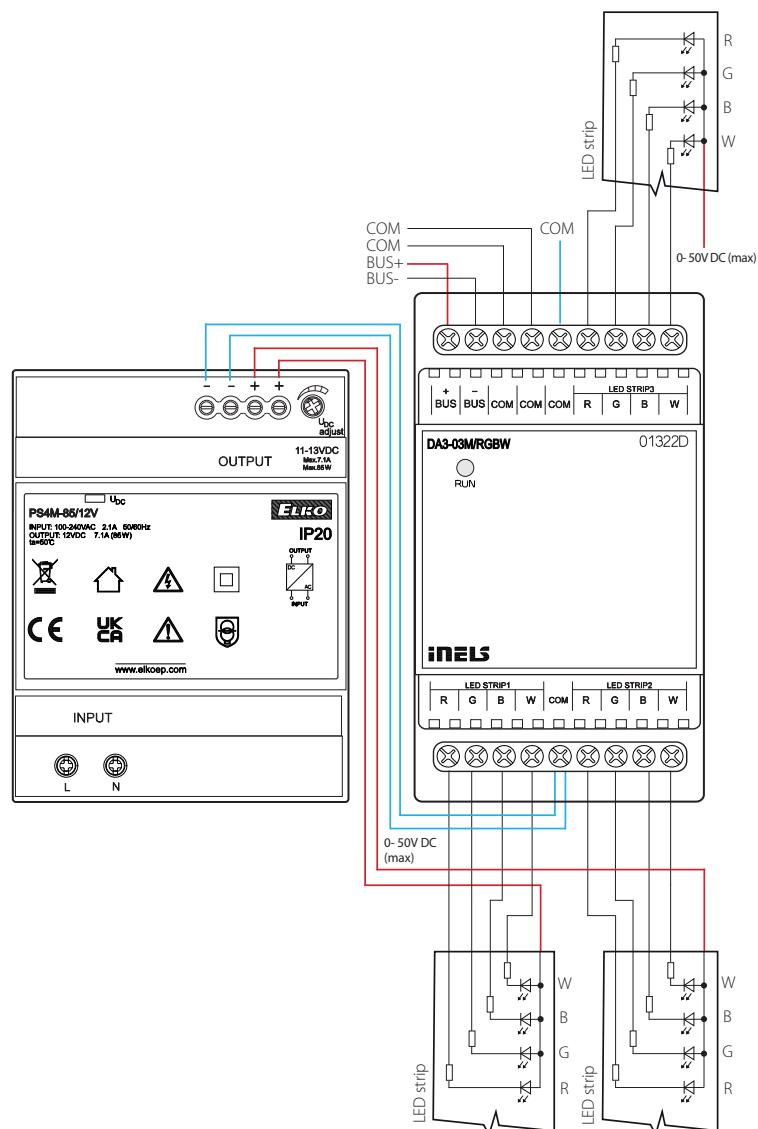

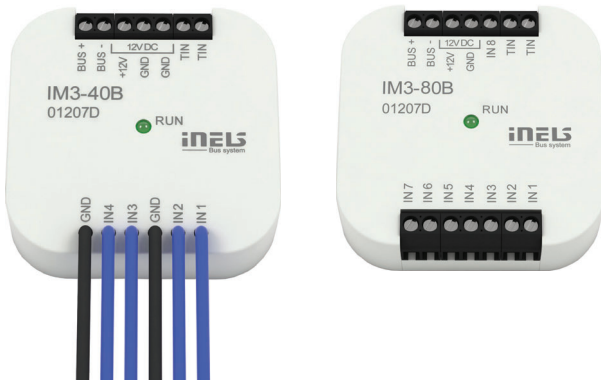



EAN code  
 IM3-40B: 8595188132312  
 IM3-80B: 8595188132329

Technical parameters	IM3-40B	IM3-80B
<b>Inputs</b>		
Input:	4x* IN1, IN2**	8x* IN1- IN5**
Max. frequency pulse reading:	20 Hz	
Temperature measuring:	yes, input for external thermo sensor TC/TZ	
Range/accuracy of thermomeasuring:	-20 to +120 °C/0.5 °C from the range	
<b>Outputs</b>		
Output voltage/current:	12 V DC/75 mA, for supplying EZS sensors	
<b>Communication</b>		
Installation BUS:	BUS	
Status indication unit:	green LED RUN	
<b>Power supply</b>		
Supply voltage/tolerance:	27 V DC, -20/+10 %	
Dissipated power:	max. 1 W	
Rated current:	20 mA (at 27 V DC), from BUS	
Rated current of unit for full load on output 12 V DC:	60 mA	100 mA
<b>Connection</b>		
Terminal:	0.5-1 mm <sup>2</sup>	
Inputs:	6x conductors CY length 90 mm	x
<b>Operating conditions</b>		
Operating temperature:	-20 to +55 °C	
Storing temperature:	-30 to +70 °C	
Protection degree:	IP30	
Overvoltage category:	II.	
Pollution degree:	2	
Operating position:	any	
Installation:	into installation box	
<b>Dimensions and weight</b>		
Dimensions:	49 x 49 x 13 mm	
Weight:	32 g	27 g

\* NO or NC against GND(-)  
 \*\* are balanced inputs


- Binary input units IM3-40B and IM3-80B are used for connection of 4 or 8 devices with potential-less contacts (switches, buttons, switches of other design, PIR detectors, fire and gas detectors, etc.).
- Part of the inputs can be used as a balanced for alarm detectors:
  - IM3-40B – inputs IN1, IN2
  - IM3-80B – inputs IN1 – IN5
- Contacts of external devices connected to the inputs of the unit can be NO or NC - input parameters are configured in the software iDM3.
- Within the internal ESS configured in the iDM3 software, inputs must be set to balance or double balance.
- The units generate a supply voltage of 12 V DC/75 mA for powering external intrusion detectors, so they can power PIR detectors, fire and gas detectors.
- Active use 12 V DC output for powering detectors increases the nominal consumption of units from BUS (see technical data).
- The units can be used for counting pulses of energy meters with pulse output.
- The units are equipped with a temperature input for connecting an external two-wire temperature sensor TC/TZ (see accessories).
- IM3-40B, IM3-80B in case type B are designed for mounting into a installation box.

**Connection**

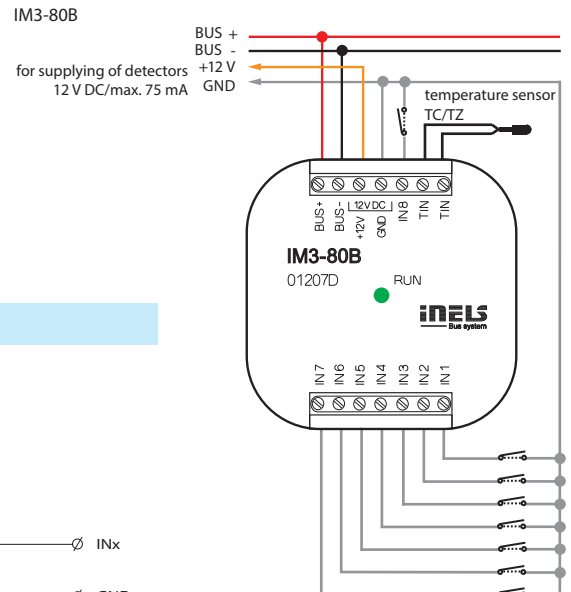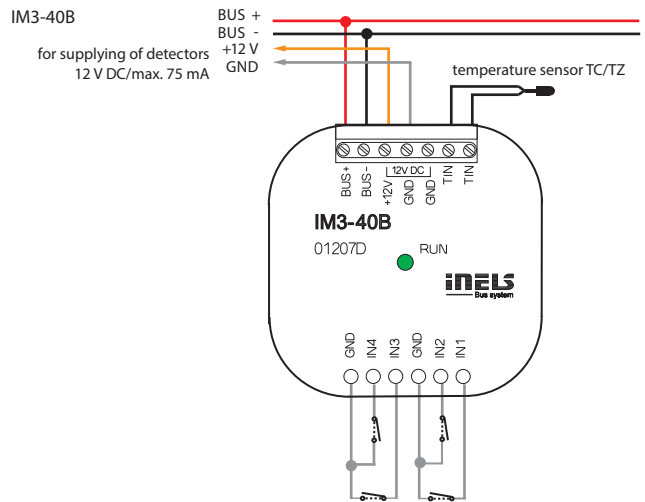


**Balanced input**

Simple:

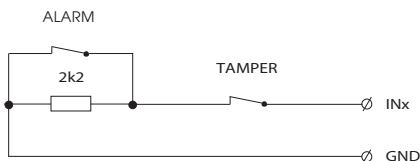

Double:

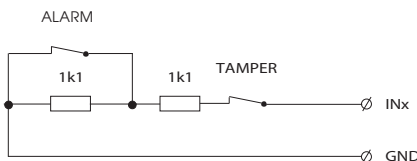




EAN code  
IM3-140M: 8595188132459

Technical parameters		IM3-140M
<b>Inputs</b>		
Input:	14x NO or NC against GND (-) IN1 - IN7 - are balanced inputs	
Max. frequency pulse reading:	20 Hz	
<b>Outputs</b>		
Output (power supply 12 V for sensors):	12 V DC/150 mA	
<b>Communication</b>		
Installation BUS:	BUS	
Data transfer indication:	green LED	
<b>Power supply</b>		
Supply voltage/tolerance:	27 V DC, -20/+10 %	
Dissipated power:	max. 1 W	
Rated current:	25 mA (at 27 V DC), from BUS	
Rated current for full load on output 12 V DC:	100 mA	
<b>Connection</b>		
Terminal:	max. 2.5 mm <sup>2</sup> /1.5 mm <sup>2</sup> with sleeve	
<b>Operating conditions</b>		
Air humidity:	max. 80 %	
Operating temperature:	-20 to +55 °C	
Storing temperature:	-30 to +70 °C	
Protection degree:	IP20 device, IP40 mounting in the switchboard	
Overvoltage category:	II.	
Pollution degree:	2	
Operating position:	any	
Installation:	into a switchboard rail to DIN EN 60715	
Design:	3-MODULE	
<b>Dimensions and weight</b>		
Dimensions:	90 x 52 x 65 mm	
Weight:	104 g	


- Binary input unit IM3-140M is designed to connect up to 14 devices with potentialless contact (such as switches, buttons of other designs, fire and glass detectors and others).
- Inputs IN1 - IN7 can be balanced.
- Contacts of external devices connected to the inputs of the drive can be NO or NC - Input parameters are configured in the software iDM3.
- Inputs must be configured as balanced or double balanced - in an internal Electronic security system configured in iDM3 software.
- The unit generates a supply voltage of 12 V DC/150 mA for powering external detectors, so it can power PIR detectors, fire and gas detectors.
- Active use 12 V DC output for powering detectors increases the nominal consumption units from BUS (see technical data).
- The unit can be used for counting pulses of energy meters with pulse output.
- IM3-140M in 3-MODULE is designed for switchboard mounting on DIN rail EN60715.

### Connection

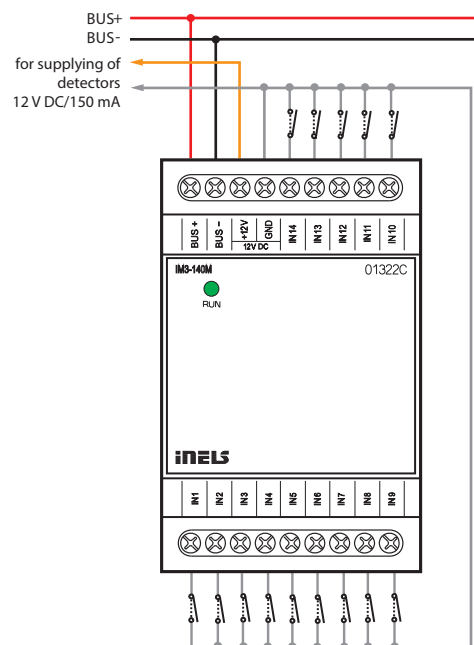


### Balanced input

Simple:

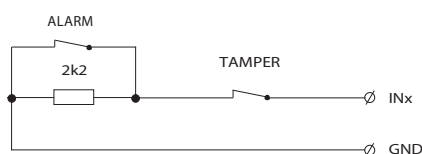

Double:

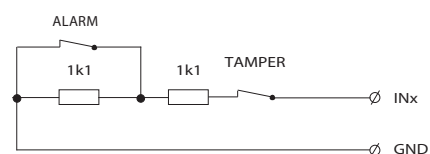





EAN code  
TI3-40B: 8595188132695


**Technical parameters** **TI3-40B**

Input	
Temperature input for temperature measuring:	4x inputs for external thermo sensor*
Temperature measurement range:	by type of sensor, prob from -50°C to 400°C
Converter resolution:	15 bit
Communication	
Installation BUS:	BUS
Status indication unit:	green LED RUN
Power supply	
Supply voltage/tolerance:	27 V DC, -20/+10 %
Dissipated power:	max. 1 W
Rated current:	20 mA (at 27 V DC), from BUS
Connection	
Terminal:	0.5 mm <sup>2</sup> - 1 mm <sup>2</sup>
Operating conditions	
Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP30
Overvoltage category:	II.
Pollution degree:	2
Operating position:	any
Installation:	into installation box
Dimensions and weight	
Dimensions:	49 x 49 x 13 mm
Weight:	27 g


\*TC, TZ, Ni1000, Pt1000, Pt100, see accessories

**Connection options**

**2-wire**  
- it is necessary to connect terminals TIN\_B and COM




**3-wire**  
- connection of the sensor needs to be done according to the technical specifications



- The unit is designed for connection of up to four (TI3-40B) external temperature sensors.
- Units range TI3 support the connection of the following temperature sensors:
  - TC/TZ - 2-wire connections
  - Ni1000, Pt1000, Pt100 - 2-wire and 3-wire connections
- Used in when necessary to take temperatures from different places (for example large floor heating – diagonal layout of sensors, floor/space, indoor/outdoor temperature, technological device – boiler, solar heating etc.)
- Status of units indicated by green RUN LED on the front panel:
  - if the supply voltage is connected (units are powered via the BUS), but there is no communication with the master, RUN LED is lit continuously.
  - if the supply voltage is connected and the unit communicates via standard BUS, RUN LED flashes.
- TI3-40B in version B is designed for mounting into an installation box.

**Connection**

TI3-40B

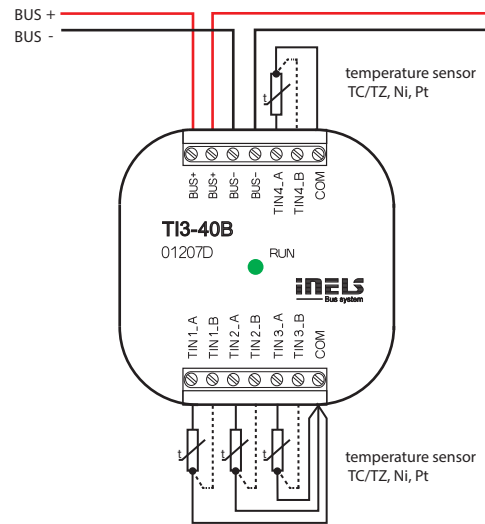

INEL



EAN code  
T13-60M: 8595188132893

### Technical parameters

### T13-60M

#### Inputs

Temperature input for temperature measuring:	6x input for external temperature sensor TC, TZ, Ni1000, Pt1000, Pt100 see accessories
Temperature measurement range:	by type of sensor, probe from -50°C to 400°C
Converter resolution:	15 bit
Indication of exceeding the range or interruption of the sensor:	6x red LED

#### Communication

Installation BUS:	BUS
Status indication unit:	green LED RUN

#### Power supply

Supply voltage/tolerance:	27 V DC, -20/+10 %
Dissipated power:	max. 1 W
Rated current:	45 mA (at 27 V DC), from BUS

#### Connection

Terminal:	max. 2.5 mm <sup>2</sup> /1.5 mm <sup>2</sup> with sleeve
-----------	-----------------------------------------------------------

#### Operating conditions


Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20 device, IP40 mounting in the switchboard
Overvoltage category:	II.
Pollution degree:	2
Operating position:	any
Installation:	into a switchboard rail to DIN EN 60715
Design:	3-MODULE

#### Dimensions and weight

Dimensions:	90 x 52 x 65 mm
Weight:	111 g

- Unit T13-60M is designed to connect up to six external temperature sensors.
- Units range T13 support the connection of the following temperature sensors:
  - TC/TZ - 2-wire connections
  - Ni1000, Pt1000, Pt100 - 2-wire and 3-wire connections
- It is used in cases where it is necessary to read the temperature, eg floor/room, indoor/outdoor temperature, process equipment - boiler, solar heating, etc.
- Unit status is indicated by green RUN LED on the front panel:
  - if the supply voltage is connected (the unit is powered via the BUS), but there is no communication with the master, RUN LED is lit continuously.
  - if the supply voltage is connected and the unit communicates via standard BUS, RUN LED flashes.
- The status on individual temperature inputs is indicated by the relevant red LED on the front panel:
  - LIT - temperature sensor disconnection
  - FLASHES - exceeding of the temperature range
  - UNLIT - ok
- T13-60M in 3-MODULE is designed for switchboard mounting on DIN rail EN60715.

### Connection

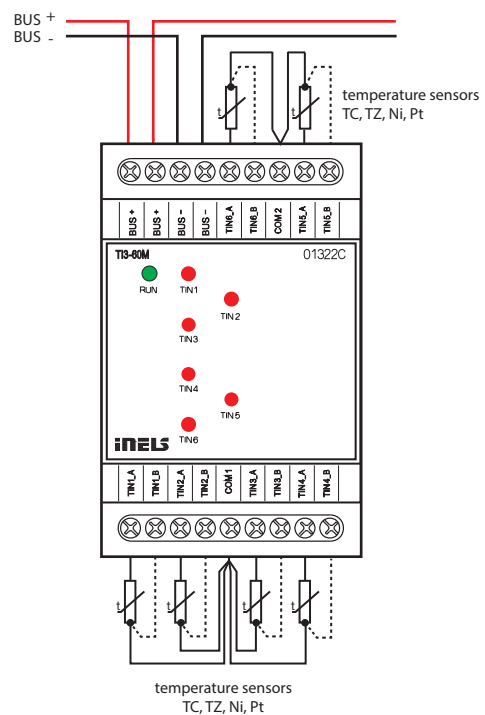

### Connection options

#### 2-wire


- it is necessary to connect terminals TIN\_B and COM



#### 3-wire

- connection of the sensor needs to be done according to the technical specifications



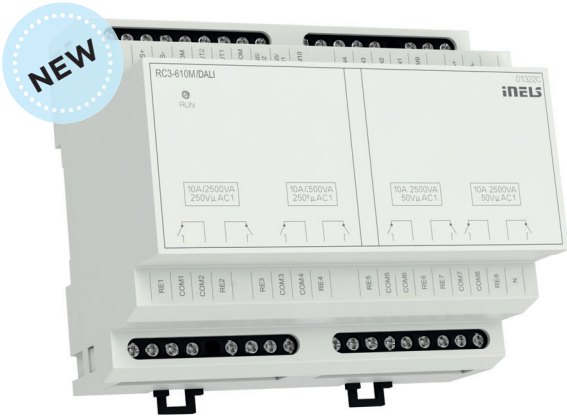

EAN code  
RC3-610M/DALI: 8595188184663

Technical parameters		RC3-610M/DALI
<b>Output</b>		
<b>Relay</b>		8x NO/switch 10 A/AC1
Switched voltage:		250VAC , 30VDC
Switched power:		2500 VA/AC1, 150 W/DC
Peak current:		10A AC1 , 5A DC
Relay outputs separated from all internal circuits:		reinforced insulation (Overvoltage cat. II according to EN 60664-1)
Isolation between COM1,2 a COM3,4 a COM5,6,7,8 *		basic insulation (cat. overvoltage II according to EN 60664-1) max. 400AC
Isolation voltage of the open relay contact:		1 kV
Max. current through one common terminal:		16 A
Minimum switching current:		100 mA/10 V DC
Mechanical service life:		10 000 000
Electrical life AC1:		100 000
<b>Analog</b>		
Analog outputs:		AO1, AO2
Voltage analogue. output/ max. current:		2x 0(1) - 10 V/10 mA
<b>Inputs</b>		
Input DIN:		6x DIN (digital input) or 4x DIN + 2x TIN (temperature input) **
DIN sampling rate:		20 Hz
DIN common wire:		COM9, COM10
TIN common wire:		TINCOM
<b>Communication</b>		
<b>DALI</b>		
Output interface:		DALI
DALI addresses (max.):		16
Internal DALI source:		yes, max. 64 mA
<b>BUS</b>		
Installation bus:		BUS
Indication of unit status:		Green LED RUN
<b>Power</b>		
Internal DALI supply terminals:		terminals COM8 and N
Internal DALI supply voltage:		100-240V 50/60Hz max.0.1A
Power dissipation:		3 W
<b>Connection</b>		
Terminal plate:		max. 2.5 mm <sup>2</sup> /1.5 mm <sup>2</sup> with core

\* adjacent COM terminals (COM1 and 2, COM3 and 4, COM5 and 6, COM7 and 8) must be at the same potential

\*\* input function is set during configuration


\*\*\* ACOM and COM9 terminals are at BUS potential


To provide power to the Dali bus via DA+ and DA-, it is essential to establish a 230V connection between Com8 and N.

- The RC3-610M/DALI is an I/O actuator equipped with 6 binary inputs, of which 2 can be configured as temperature inputs and 8 independent relays with switching potential-free and potential contacts. It also includes two analog outputs 0(1)-10 V with a load capacity of up to 10 mA.
- Binary inputs RC3-610M/DALI are used for connecting up to 6 devices with a non-decimal contact (such as switches, switches, buttons of other designu, EZS and EPS detectors and others).
- Temperature inputs support the connection of TC/TZ temperature sensors in a 2-wire connection for temprature sensing needs.
- The actuator is designed for switching up to eight different appliances and loads by relay output (potential-free contact).
- The maximum load capacity of the relay contacts is 10 A/2500 VA/ AC1. Each of the output contacts is individually controllable. Relays are divided into four pairs, where each pair switches on its common potential.
- The DALI system BUS allows control of up to 16 independent DALI (Digital Addressable Lighting Interface) ballast addresses for fluorescent, LED and other luminaires.
- Analog outputs are considered for use with thermoregulation heads, air-conditioning ventilation flaps, various other dimmers or other devices with an analog control voltage of 0-10 V or 1-10 V.
- The parameters of all configurable inputs and outputs are set in the iNELS Designer & Manager configuration software environment, which is designed for Windows 7, 8 and 10 operating systems.
- RC3-610M/DALI in 6-MODULE version is designed for mounting into a switchboard on DIN rail EN60715.

Operating conditions	
Working temperature:	-20 to +55 °C
Storage temperature:	-30 to +70 °C
Degree of protection:	IP20 device, IP40 with cover in the control cabinet
Surge category:	II.
Degree of pollution:	2
Working position:	any
Installation:	to the control cabinet for DIN rail EN 60715
Design:	6-MODULE
Dimensions and weight	
Dimensions:	90 x 105 x 65 mm
Weight:	310 g

**Connection**

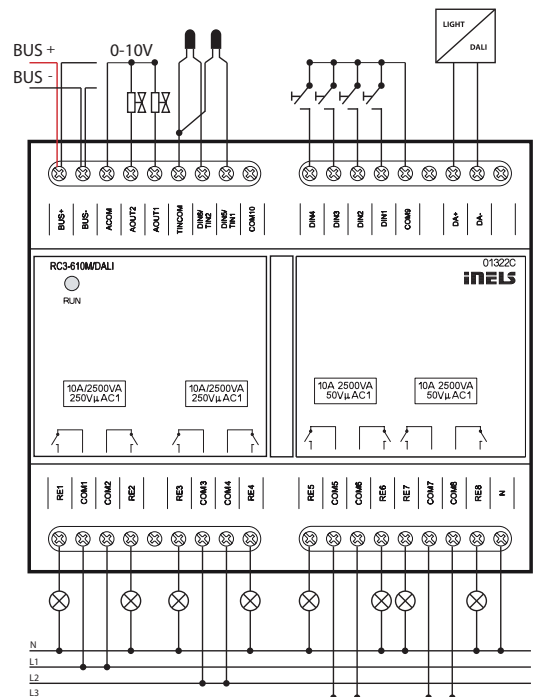

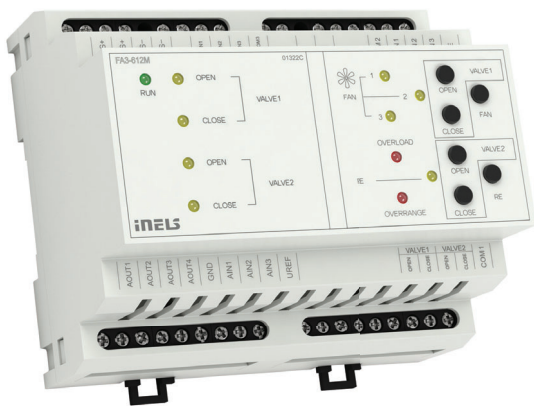


EAN code  
FA3-612M: 8595188135276

**Technical parameters** **FA3-612M**


Input	
<b>Analog inputs:</b>	3x voltage, current or temperature input
Number of inputs:	3
Galv. separation from inner circuits:	no
Diagnostic:	indication red LED OVERRANGE (exceeding the range, interruption of a sensor or overload of Uref output)
Common terminal:	GND
Converter resolution:	14 bits
Input resistance	
- for voltage ranges:	approx. 150 kΩ
- for current ranges:	100 Ω
Types of inputs/measuring ranges*:	<b>Voltage (U):</b> 0 ÷ +10 V (U) ; 0 ÷ +2 V (U) <b>Current (I):</b> 0 ÷ +20 mA (I) ; 4 ÷ +20 mA (I) <b>temperature:</b> input at ext. temperature sensor TC, TZ, Ni1000**, Pt1000**, Pt100** see accessories/ according to used sensor from -30 °C to 250 °C
<b>Digital inputs:</b>	3x switching or expansion, positive logic (SINK)
Input voltage:	20 - 240 V AC (50 - 60 Hz)/DC
Galv. separation from internal circuits:	yes
Common lead:	GO COM3
Outputs	
<b>Analog:</b>	4x (A_OUT1 - A_OUT4)
Voltage analog. output/max. Current:	4x 0(1) - 10 V/10 mA
<b>Uref reference voltage outputs</b>	
Voltage/Current Uref:	10 V DC/100 mA
Output overload indication:	red LED OVERLOAD
<b>SSR (Electronic Relay):</b>	4x (VALVE1 - VALVE2)
Switching voltage:	20 - 240 V AC
Switching capacity:	480 VA
Peak current:	20 A, t ≤ 16 ms
Output indication:	yellow LED
<b>Relay 6A:</b>	4x (FAN1-FAN3, RE)
Switching voltage:	250 V AC, 24 V DC
Switching capacity:	1500 VA/AC1; 300 VA/AC15; 180 W/DC, AC3
Relay outputs separated from all internal circuits:	reinforced insulation (Cat. II surges by EN 60664-1)
Minimum switching load:	500 mW (12 V/10 mA)
Mechanical life:	10x10 <sup>6</sup>
Electrical life AC1:	6x10 <sup>4</sup>
Output indication:	yellow LED
Communication	
Installation BUS:	BUS
Status indication unit:	green LED RUN
Power supply	
Supply voltage/tolerance/ rated current:	27 V DC, -20/+10 %, 5 mA
Supply voltage of power section (relay) tolerance/ nominal current:	AC 230 V (50 Hz), -15/+10 %, 20 mA
Dissipated power:	max. 1 W

- FA3-612M is a unit (actuator) designed to control fan coil units using analogue/digital inputs and analog/relay outputs.
- Analog inputs for temperature, voltage or current measurement (Uref reference voltage can also be used).
- The digital inputs are galvanically isolated with positive logic (Sink) in the 24-230 V AC/DC voltage range.
- Analog outputs 0-10 V.
- Connection to the installation BUS.
- Buttons for closing/opening the valve, fan and heating relay.
- The LEDs on the front panel indicate FAN, RE, VALVE1, VALVE2, OVERRANGE, and OVERLOAD status.
- FA3-612M in 6-MODULE version is designed for mounting into a switch-board, on DIN rail EN60715.

Connection	
Terminal:	max. 2.5 mm <sup>2</sup> /1.5 mm <sup>2</sup> with sleeve
Operating conditions	
Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20 device, IP40 mounting in the switchboard
Overvoltage category:	II.
Pollution degree:	2
Operating position:	any
Installation:	switchboard on DIN rail EN 60715
Design:	6-MODULE
Dimensions and weight	
Dimensions:	90 x 105 x 65 mm
Weight:	307 g

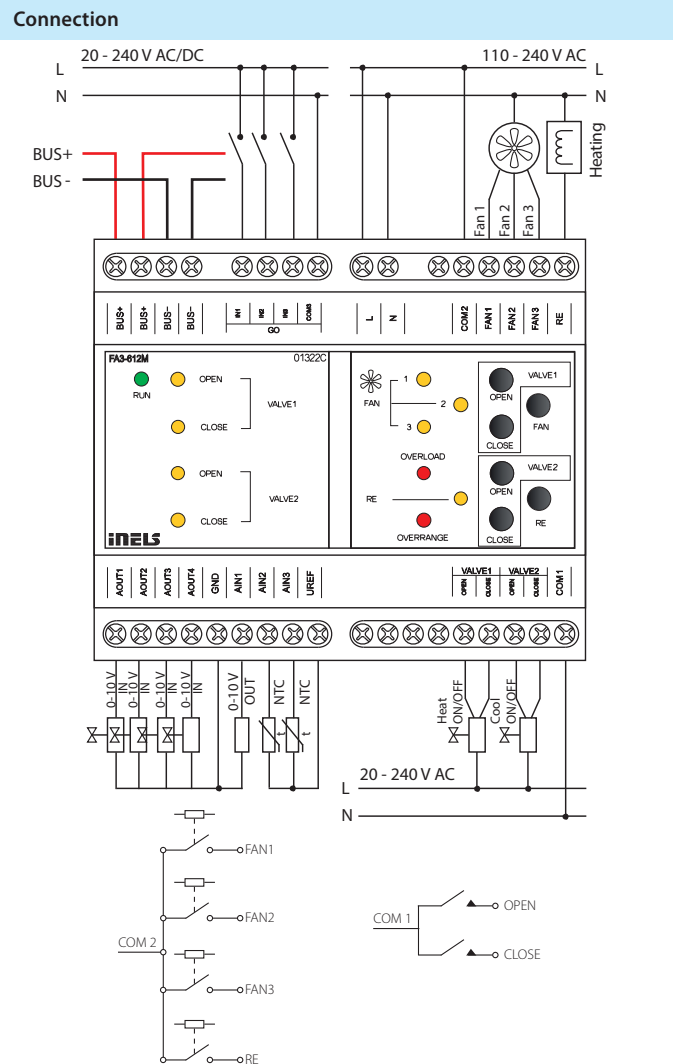

\* selectable for each input individually by configuration in the user program IDM3.  
\*\* The FA3-612M / Pt version is available for these sensors.

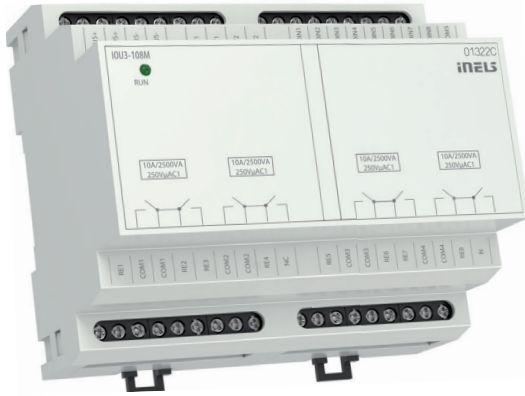


EAN code  
IOU3-108M: 8595188181884


Technical parameters		IOU3-108M
<b>Outputs</b>		
Output:	8x switching 8 A/AC1	
Switched voltage:	250 V AC1, 150 W/DC	
Switched output:	2500 VA/AC1, 150 W/DC	
Peak current:	10 A	
Output relays separated from all internal circuits:	reinforced insulation (Cat. II surges by EN 60664-1)	
Isolation between relay outputs COM1, COM2 and COM3:	basic insulation (Cat. II surges by EN 60664-1)	
Isolates. voltage open relay contact:	1 kV	
Max. current of one common terminal:	16 A	
Minimal switched current:	100 mA/10 V DC	
Switching frequency without load:	300 min <sup>-1</sup>	
Switching frequency with rated load:	15 min <sup>-1</sup>	
Mechanical life:	10 000 000	
Electrical life AC1:	100 000	
Mains voltage detection:	yes - (relay switched to neutral)	
<b>Inputs</b>		
Input:	8x NO or NC against GND (-)	
Max. frequency pulse reading:	20 Hz	
Temperature input for temperature measuring:	2x input for external thermo sensor TC, TZ (NTC 12k)	
Temperature measurement range:	by type of sensor, prob from -40 °C to 125 °C	
Converter resolution:	15 bit	
<b>Communication</b>		
Installation BUS:	BUS	
Status indication unit:	green LED RUN	
<b>Power supply</b>		
Voltage of BUS/tolerance/nominal current:	27 V DC, -20/+10 %, 110 mA	
Dissipated power:	3 W	
<b>Connection</b>		
Terminal:	max. 2.5 mm <sup>2</sup> /1.5 mm <sup>2</sup> with sleeve	
<b>Operating conditions</b>		
Operating temperature:	-20 to +55 °C	
Storing temperature:	-30 to +70 °C	
Protection degree:	IP20 device, IP40 mounting in the switchboard	
Overvoltage category:	II.	
Pollution degree:	2	
Operating position:	any	
Installation:	switchboard on DIN rail EN 60715	
Design:	6-MODULE	
<b>Dimensions and weight</b>		
Dimensions:	90 x 105 x 65 mm	
Weight:	310 g	


- IOU3-108M is combined actuator equipped with 8 binary inputs, 2 temperature inputs and 8 independent relays with switching potential-free contacts.
- Binary inputs IOU3-108M are used to connect up to 8 devices with a potential-free contact (such as switches, buttons, burglar alarm and fire detectors or others).
- The unit can be used to read pulses from energy meters with a pulse output.
- The temperature inputs support the connection of the following temperature sensors: TC / TZ - 2-wire connection.
- They are used in cases where it is necessary to measure the temperature, eg floor/space, indoor/outdoor temperature, technological equipment - boiler rooms, solar heating, etc.
- The maximum load capacity of the contacts is 10 A / 2500 VA / AC1.
- Each of the output is individually controllable and addressable.
- The relays are divided into four pairs, where each pair switches its common potential.
- The actuator is designed for switching up to eight different appliances and loads via a relay output (potential-free contact).
- IOU3-108M in 6-MODULE design is designed for mounting in a switch-board on DIN rail EN60715.

Connection

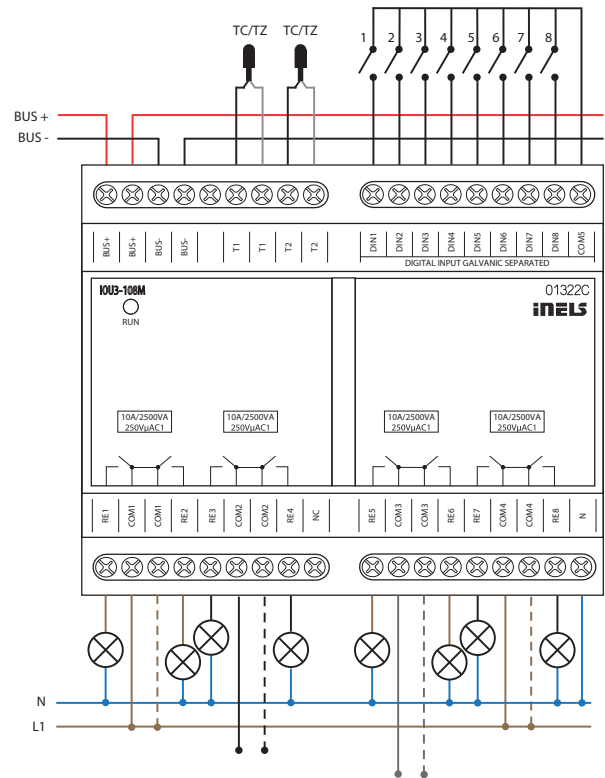

Diagram

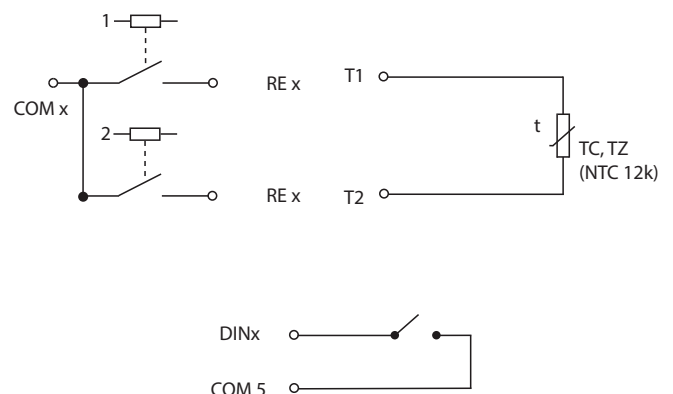




EAN code  
WSB3-20: 8595188132343  
WSB3-20H: 8595188132473

Technical parameters	WSB3-20	WSB3-20H
<b>Inputs</b>		
Temperature measuring:	yes, built-in temperature sensor	
Scope and accuracy of temp. measuring:	0 to +55 °C ; 0.3 °C from the range	
Number of control buttons:	2	
Humidity measurement:	NO	YES
Humidity measurement range:	-	0 to 99 % Relative humidity
Humidity measurement accuracy:	-	± 3 % Relative humidity
Inputs:	2x AIN/DIN	
External temperature sensor:	YES, the connection between AIN1/DIN1 and AIN2/DIN2	
Type of ext. sensor:	TC/TZ	
Temperature measurement range:	-20 °C to +120 °C	
Temp. measurement accuracy:	0.5 °C from range	
<b>Outputs</b>		
Indication:	two-colored LED (red, green)	
Number of LEDs:	1	
<b>Communication</b>		
Installation BUS:	BUS	
<b>Power supply</b>		
Supply voltage/tolerance:	27 V DC, -20/+10 %	
Dissipated power:	max. 0.5 W	
Rated current:	25 mA (at 27 V DC), from BUS	
<b>Connection</b>		
Terminals:	0.5 - 1 mm <sup>2</sup>	
<b>Operating conditions</b>		
Operating temperature:	-20 to +55 °C	
Storing temperature:	-30 to +70 °C	
Protection degree:	IP20	
Overvoltage category:	II.	
Pollution degree:	2	
Operation position:	any	
Installation:	into installation box	
<b>Dimensions and weight</b>		
Dimensions		
- plastic:	85.6 x 85.6 x 42 mm	
- metal, glass, wood, granite:	94 x 94 x 36 mm	
Weight:	55 g (without frame)	


- Wall controllers with low-upstroke control WSB3-20 and WSB3-20H are the main and most frequently used units (controller) in the iNELS system.
- Built-in micro-buttons with low upstroke offer elegant and easy controlling.
- Wall switches WSB3-20 and WSB3-20H are available in 2-channels version.
- Double color (red/green) LED diode indicates either status of controlled appliances or status of any sensor or actuator in the system.
- Wall buttons in WSB3 series are compatible with both types of frames LOGUS<sup>90</sup> (85.6 x 85.6 or 94 x 94 mm), therefore you can combine them with double and triple frames and classic products of the series.
- Each controller is equipped with a temperature sensor. It is also equipped with two analog/digital inputs (AIN/DIN), which can be used to connect two potentialless contacts or one external temperature sensor TC/TZ (e.g. for measuring floor temperature).
- Wall button WSB3-20H is comparable to the WSB3-20 but additionally equipped with a relative humidity meter, and for better access of air to the sensor can be used with 99621T including accessories 99622 (Vista MT) and 99623 (Vista IRMT), instead of the housing cover 99601T.
- Compared to standard wall buttons WSB3-20 and WSB3-20H are more flexible and multifunctional. You can for example controll appliances by short and long push of the button (e.g.: dimming, shutter control, scenes).
- Each button can control any appliance in the system and can use a variety of centralized or time controlled features. Accordingly, the customer can choose the simplicity/complexity of the operation. The big advantage is the possibility to change the method of control by only making software modifications without physical interventions into the structure of the building.
- Each button (fold) can have different functional modes beside lighting control:
  - a) Classic wall-switch:
    - upper button ON, bottom button OFF
  - b) Button controller (impulse relay):
    - first press ON, second press OFF
  - c) Dimmer:
    - short press – ON/OFF
  - d) Time switch:
    - ON after press, automatically OFF after set time
  - e) Setting light scenes – for example: for watching TV:
    - shutters down
    - main light 30% intensity
    - wall-lamps 50% intensity
- WSB3 in LOGUS<sup>90</sup> design is designed for mounting into an installation box.

### Connection

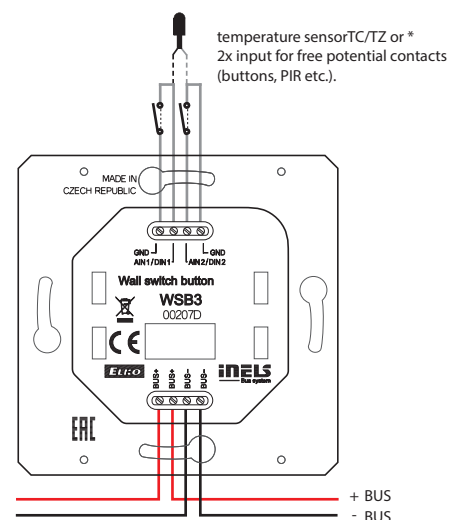

\* The choice is made in iDM3 for each unit separately.






EAN code  
 WSB3-40: 8595188132336  
 WSB3-40H: 8595188133043


Technical parameters	WSB3-40	WSB3-40H
<b>Inputs</b>		
Temperature measuring:	YES, built-in temperature sensor	
Scope and accuracy of temp. measuring:	0 to +55 °C ; 0.3 °C from the range	
Number of control buttons:	4	
Humidity measurement:	NO	YES
Humidity measurement range:	-	0 to 99 % Relative humidity
Humidity measurement accuracy:	-	± 3 % Relative humidity
Inputs:	2x AIN/DIN	
External temperature sensor:	YES, the connection between AIN1/DIN1 and AIN2/DIN2	
Type of external sensor:	TC/TZ	
Temp. measurement range:	-20 °C to +120 °C	
Temp. measurement accuracy:	0.5 °C from range	
<b>Outputs</b>		
Indication:	two-colored LED (red, green)	
Number of LEDs:	2	
<b>Communication</b>		
Installation BUS:	BUS	
<b>Power supply</b>		
Supply voltage/tolerance:	27 V DC, -20/+10 %	
Dissipated power:	max. 0.5 W	
Rated current:	25 mA (at 27 V DC), from BUS	
<b>Connection</b>		
Terminals:	0.5 - 1 mm <sup>2</sup>	
<b>Operating conditions</b>		
Operating temperature:	-20 to +55 °C	
Storing temperature:	-30 to +70 °C	
Protection degree:	IP20	
Overvoltage category:	II.	
Pollution degree:	2	
Operation position:	any	
Installation:	into installation box	
<b>Dimensions and weight</b>		
Dimensions		
- plastic:	85.6 x 85.6 x 42 mm	
- metal, glass, wood, granite:	94 x 94 x 36 mm	
Weight:	55 g (without frame)	

\* The choice is made in iDM3 for each unit separately.

- Wall mounted controllers with upstroke control WSB3-40 and WSB3-40H are the basic and most popular feature (control) of the iNELS system.
- Built-in micro-switch with low upstroke offers elegant and pleasant control.
- Controllers WSB3-40 and WSB3-40H are supplied with 4-channels.
- Two-coloured indication LEDs located in each controller, can signal the status of controlled appliances or the status of any sensor or actuator in the system.
- Wall buttons in WSB3 series are compatible with both types of frames LOGUS<sup>90</sup> (85.6x85.6 or 94x94 mm), therefore you can combine them with double and triple frames and classic products of the series.
- Each controller is equipped with a temperature sensor. It is also equipped with two analog/digital inputs (AIN/DIN), which can be used to connect two potentialless contacts or one external temperature sensor TC/TZ (e.g. for measuring floor temperature).
- Compared to standard wall buttons WSB3-20 and WSB3-20H are more flexible and multifunctional. You can for example controll appliances by short and long push of the button (e.g.: dimming, shutter control, scenes).
- Each button can control any appliance in the system and can use a variety of centralized or time controlled features. Accordingly, the customer can choose the simplicity/complexity of the operation. The big advantage is the possibility to change the method of control by only making software modifications without physical interventions into the structure of the building.
- Each button (fold) can have different functional modes beside lighting control:
  - a) Classic wall-switch:
    - upper button ON, bottom button OFF
  - b) Button controller (impulse relay):
    - first press ON, second press OFF
  - c) Dimmer:
    - short press – ON/OFF
  - d) Time switch:
    - ON after press, automatically OFF after set time
  - e) Setting light scenes – for example: for watching TV:
    - shutters down
    - main light 30% intensity
    - wall-lamps 50% intensity
- WSB3 in LOGUS<sup>90</sup> design is designed for mounting into an installation box.

Connection

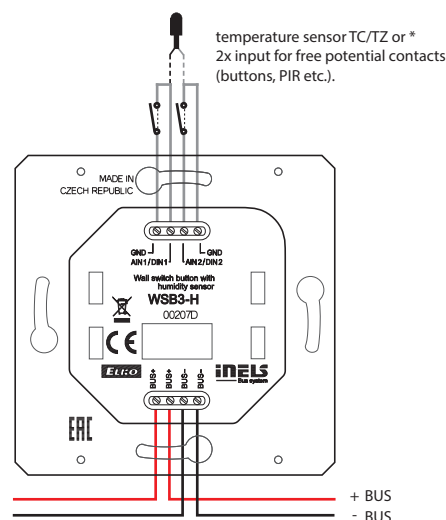



EAN code  
WMR3-21: 8595188132756

**Technical parameters** **WMR3-21**

**Inputs**

Number of control buttons:	2
----------------------------	---

**RFID readers**

Supported frequencies:	13.56 MHz
Card Type:	MIFARE Ultralight, DESFire 2K (EV1), DESFire 4K (EV1)

**Outputs**

Output:	1x changeover 8 A/AgSnO <sub>2</sub>
Indication:	two-color LED (red, green)
Acoustic output:	piezo-changer
Switching voltage:	230 V A/30 V DC
Switching output:	2000 VA/AC1; 240 W/DC
Peak current:	20 A/<3s
Insulation voltage between relay outputs and internal circuits:	3.75 kV, SELV according to EN 60950
Minimal switched current:	10 mA/10 V
Switching frequency without load:	300 min <sup>-1</sup>
Switching frequency with rated load:	15 min <sup>-1</sup>
Mechanical life:	1x 10 <sup>7</sup>
Electrical life AC1:	1x 10 <sup>5</sup>

**Communication**

Installation BUS:	BUS
-------------------	-----

**Power supply**

Supply voltage/tolerance:	27 V DC, -20/+10 %
Dissipated power:	max. 0.5 W
Rated current:	50 mA (at 27 V DC), from BUS

**Connection**

Data:	terminals, 0,5 - 1 mm <sup>2</sup>
Network:	max. 2.5 mm <sup>2</sup> /1.5 mm <sup>2</sup> with sleeve

**Operating conditions**


Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20
Overvoltage category:	II.
Pollution degree:	2
Operation position:	any
Installation:	into installation box


**Dimensions and weight**

Dimensions	
- plastic:	85.6 x 85.6 x 42 mm
- metal, glass, wood, granite:	94 x 94 x 36 mm
Weight:	68 g (without frame)

- WMR3-21 is a wall-mounted card reader that is designed to read contactless media (smart cards, key chains, etc.), which are used for controlling access to buildings or their parts.
- With the glass controller WMR3-21 users will appreciate the ease of control using two push buttons, which can be assigned different control functions: lighting, shading, scenes, heating, etc.
- WMR3-21 reader can be used to control the security system (locking/unlocking) access system (opening doors, gates, etc.) or appliances (based on assigned rights).
- WMR3-21 supports RFID media with the carrier frequency of 13.56 MHz. Supported card types: MIFARE Ultralight, DESFire 2K (EV1), DESFire 4K (EV1).
- WMR3-21 is also equipped with 8 A relay output with changeover contact AgSnO<sub>2</sub>, by which controlled devices can be switched directly (or any actuator in the system can be set in software iDM3).
- Indication two-color LED in the controller cover can indicate not only the status of controlled appliance, but also the status of any sensor or actuator in the system.
- Wall card reader WMR3-21 is compatible with both types of frames LOGUS<sup>90</sup> (85.6 x 85.6 or 94 x 94 mm), therefore you can combine them with double and triple frames and classic products of the series.

**Connection**

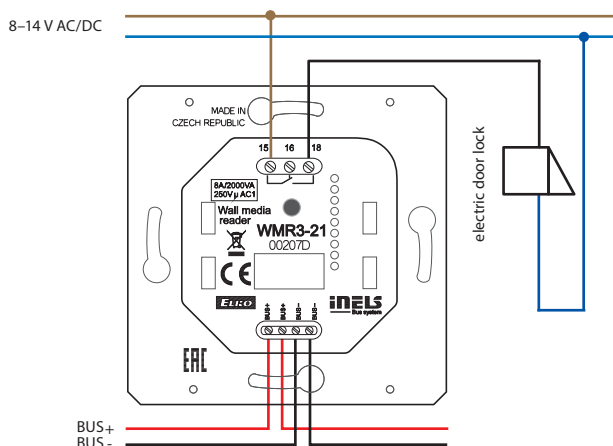

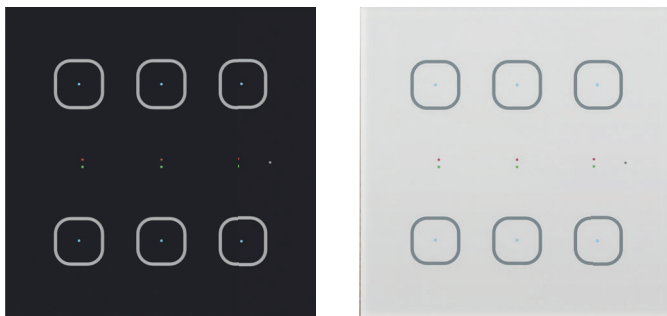

EAN code  
 GMR3-61/B: 8595188155854  
 GMR3-61/W: 8595188155793

**Technical parameters** **GMR3-61**

Inputs	
Temperature measuring:	YES, built-in temperature sensor
Scope and accuracy of temp. measuring:	0 to +55°C; 0.3°C from the range
Number of control buttons:	6

RFID readers	
Supported frequencies:	13.56 MHz
Card Type:	MIFARE Ultralight, DESFire 2K (EV1), DESFire 4K (EV1)

Outputs	
Indication:	3 pairs of LED (red, green)
Output:	1x changeover 8 A/AgSnO <sub>2</sub>
Acoustic output:	piezo-changer
Switching voltage:	230 V AC/30 V DC
Switching output:	2000 VA/AC1; 240 W/DC
Peak current:	20 A/<3s
Insulation voltage between relay outputs and internal circuits:	3.75 kV, SELV according to EN 60950
Minimal switched current:	10 mA/10 V
Switching frequency without load:	300 min <sup>-1</sup>
Switching frequency with rated load:	15 min <sup>-1</sup>
Mechanical life:	1x 10 <sup>7</sup>
Electrical life AC1:	1x 10 <sup>5</sup>

Communication	
Installation BUS:	BUS

Power supply	
Supply voltage/tolerance:	27 V DC, -20/+10 %
Dissipated power:	max. 2 W
Rated current:	50 mA (at 27 V DC), from BUS


Connection	
Data:	terminals, 0.5 - 1 mm <sup>2</sup>
Network:	max. 2.5 mm <sup>2</sup> /1.5 mm <sup>2</sup> with sleeve


Operating conditions	
Relative humidity:	max. 80 %
Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20
Overvoltage category:	II.
Pollution degree:	2
Operation position:	any
Installation:	into installation box

Dimensions and weight	
Dimensions:	94 x 94 x 36 mm
Weight:	155 g

- Wall RFID card reader GMR3-61 is designed for reading of contactless media (chip cards, key fobs, tags, etc.), which are used for controlling access to buildings or parts of buildings.
- With the glass controller GMR3-61 users will appreciate the elegant design and the easy of control using six touch buttons, which can be assigned different control functions lighting, shading, scenes, heating, etc.
- GMR3-61 a design element of the (control) system iNELS and is available in black (GMR3-61/B) and white (GMR3-61/W) variants.
- GMR3-61 reader can be used to control the security system (locking/unlocking) access system (opening doors, gates, etc.) or appliances (based on assigned rights).
- GMR3-61 supports RFID media with the carrier frequency of 13.56 MHz. Supported card types MIFARE Ultralight, DESFire 2K (EV1), DESFire 4K (EV1).
- The GMR3-61 is also equipped with 8 A relay output with changeover contact AgSnO<sub>2</sub>, which can be switched directly by reader (or by any controller in the system).
- Between each pair of touch keys is a pair of indicator LEDs (Green, Red) to indicate the status of the controlled appliance, or the state of any sensor or actuator in the system.
- Located on each touch button is a blue LED indicator, signalling the touch of a button. Touching may also be signalled by a vibrating pulse or audible tone - optionally in the software iDM3.
- All variants of GMR3-61 are available in sizes of luxury controllers LOGUS<sup>90</sup> (94 x 94 mm).
- GMR3-61 reader is equipped with a sensor of ambient light intensity. Based on information from the sensor can switch the orientation of blue LEDs on the touch-pad GSB3 or perform various actions with the software iDM3, eg. To control the lighting circuits in the corridor and others.
- GMR3-61 cannot be installed into multiple frames they are designed for mounting into installation boxes.

**Connection**

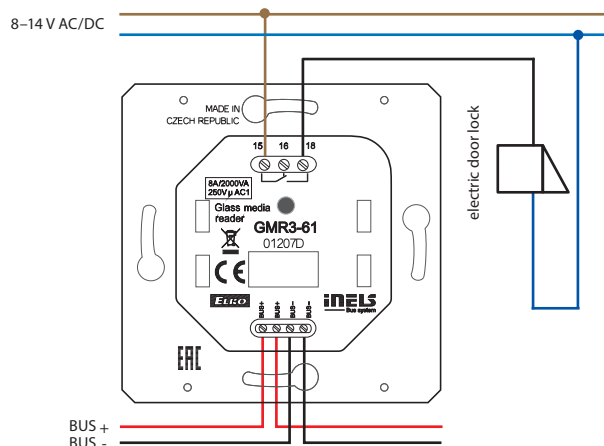

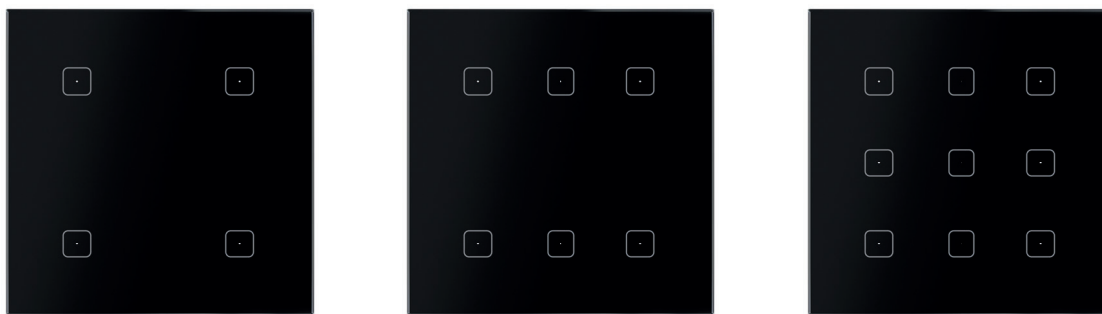

## EAN code

GSB3-240/W: 8595188189576	GSB3-260/W: 8595188189590	GSB3-90/B_V2: 8595188188272	GSB3-60/W_V2: 8595188132985
GSB3-240/B: 8595188189569	GSB3-290/B: 8595188189606	GSB3-90/W_V2: 8595188188289	GSB3-40/B_V2: 8595188132909
GSB3-260/B: 8595188189583	GSB3-290/W: 8595188189613	GSB3-60/B_V2: 8595188132916	GSB3-40/W_V2: 8595188132954

### Technical parameters GSB3-40|240 GSB3-60|260 GSB3-90|290

#### Inputs

Temperature measuring:	YES, built-in temperature sensor
Scope and accuracy of temp. measurement:	0 to +55 °C; 0.3 °C from the range
Humidity measurement:	YES
Humidity measurement range:	0 to 99 % RH
Inputs:	AIN/DIN
Resolution:	by setting 10-bit
External temperature sensor:	YES, the connection between AIN1/DIN1 and AIN2/DIN2
Type of external sensor:	TC/TZ
Temperature measurement range:	-20 °C to +120 °C
Temperature measurement accuracy:	0.5 °C from the range

#### Buttons

Number of control buttons:	4	6	9
Type:	capacitive		
Indication:	white highlighted point		

#### Outputs

Acoustic output:	piezo-changer
------------------	---------------

#### Communication

Installation BUS:	BUS
-------------------	-----

#### Power supply

Supply voltage/tolerance:	27 V DC, -20/+10 %		
Dissipated power:	max. 0.5 W		
Rated current:	20-38 mA	20-45 mA	20-50 mA
	(at 27 V DC), from BUS		

#### Connection

Terminals:	EIB $\varnothing$ 0.6 - 0.8 mm <sup>2</sup>
------------	---------------------------------------------

#### Operating conditions


Relative humidity:	max. 80 %
Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20
Overvoltage category:	II.
Pollution degree:	2
Operation position:	any
Installation:	on the wall, observing the conditions for correct installation of the sensor

#### Dimensions and weight

Dimensions:	94 x 94 x 41 mm   100 x 100 x 8 mm
Weight:	154 g

- Glass touch controllers GSB3-XXX are part of a comprehensive range of glass iNELS control units and can be advantageously used in all projects for example as a part of guest room management system (GRMS).
- The GSB3-40, GSB3-60, and GSB3-90 models feature a square design, while the GSB3-240, GSB3-260, and GSB3-290 models come in a round design.
- GSB3-40, GSB3-240 is equipped with four, GSB3-60, GSB3-260 six and GSB3-90, GSB3-290 nine touch buttons whose functions can easily modify by the software.
- The glass touch controllers is equipped with an integrated temperature sensor. It is also equipped with analog-to-digital input (AIN/DIN), which can be used to connect potential-free contact or external temperature sensor TC/TZ (for example temperature measurement of the floor).
- Advantages over conventional switches/buttons are saving space, signaling the state of any system output, the ability to measure temperature as well as the ability to connect external buttons or detectors.
- Each button can control any actuator (appliance) in the system. Also, you can assign each button a different function or macro (set of functions). It is therefore possible to use one button to control several appliances at once.
- Glass touch panel is a design component of the iNELS system and is available in elegant black (GSB3-XXX/B) and white (GSB3-XXX/W) versions.
- The individual capacitive buttons are point-illuminated by a white LED indicating the status of the controlled output.
- All versions are in the size of the standard module (94x94 mm) and designed for mounting into an installation box.


#### Other variants

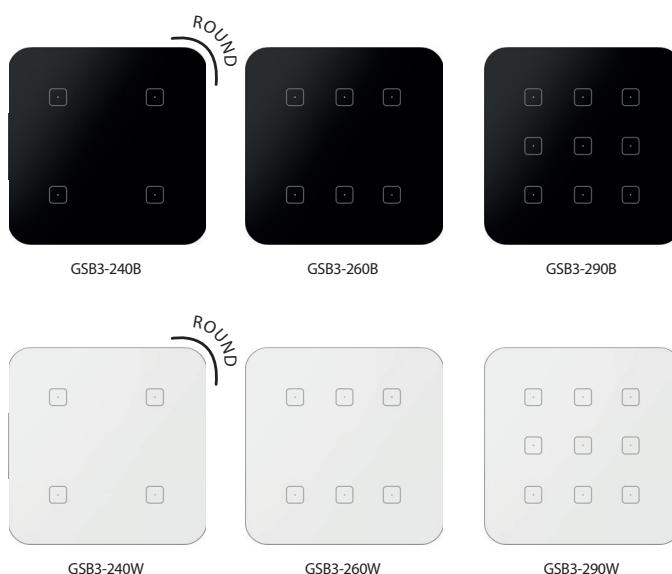



GSB3-240W

GSB3-260W

GSB3-290W

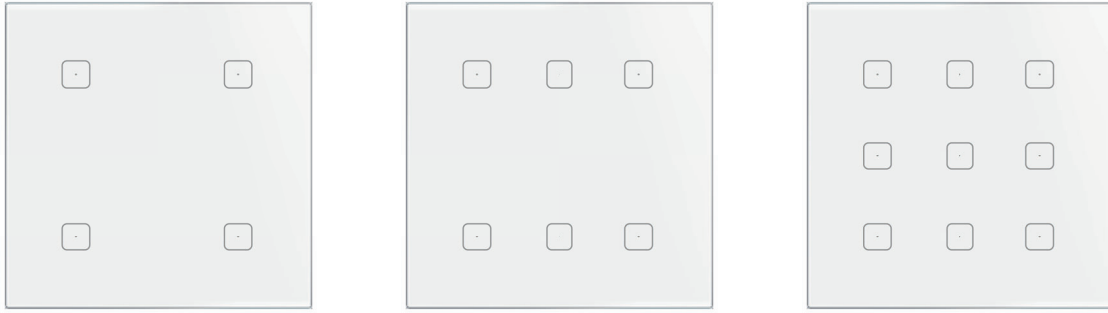

Connection

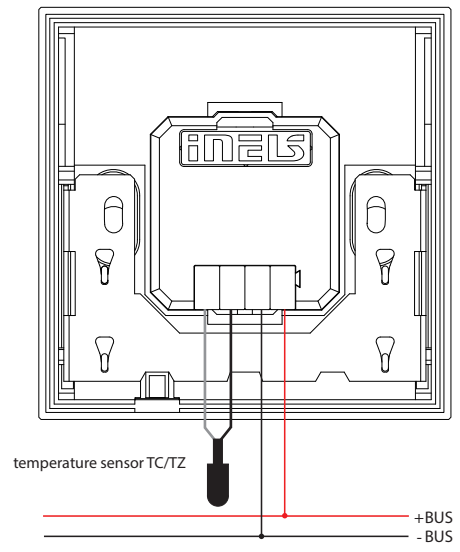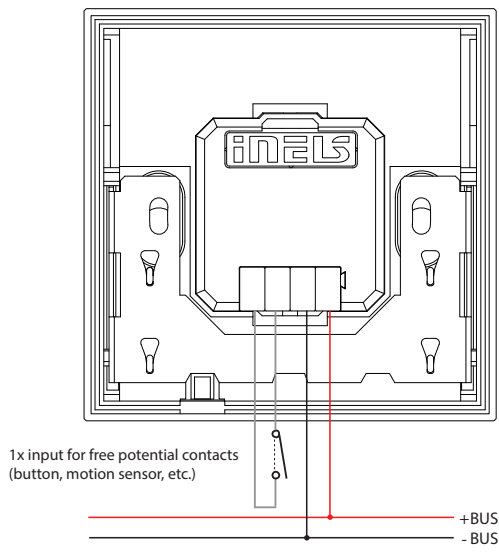

Another view



GSB3-60B



GSB3-260W



The picture of device is illustrative, the icons (symbols) are configurable by the customer.

EAN code  
 GSB3-40/SB\_V2: 8595188156233    GSB3-40/SBP\_V2: 8595188188883    GSB3-60/SWP\_V2: 8595188188876    GSB3-90/SW\_V2: 8595188188265    GSB3-240/SBP: 8595188189682    GSB3-240/SW: 8595188189637    GSB3-260/SWP: 8595188189712    GSB3-290/SB: 8595188189668  
 GSB3-40/SW\_V2: 8595188156240    GSB3-60/SB\_V2: 8595188156257    GSB3-60/SBP\_V2: 8595188188869    GSB3-90/SBP\_V2: 8595188188845    GSB3-240/SB: 8595188189620    GSB3-260/SBP: 8595188189705    GSB3-260/SW: 8595188189651    GSB3-290/SWP: 8595188189736  
 GSB3-40/SWP\_V2: 8595188188890    GSB3-60/SW\_V2: 8595188156264    GSB3-90/SB\_V2: 8595188188258    GSB3-90/SWP\_V2: 8595188188852    GSB3-240/SWP: 8595188189699    GSB3-260/SB: 8595188189644    GSB3-290/SBP: 8595188189729    GSB3-290/SW: 8595188189675

## Technical parameters GSB3-40/S|240/S GSB3-60/S|260/S GSB3-90/S|290/S

### Inputs

Temperature measuring:	YES, built-in temperature sensor
Scope and accuracy of temp. measurement:	0 to +55 °C; 0.3 °C from the range
Humidity measurement:	YES
Humidity measurement range:	0 to 99 % RH
Inputs:	AIN/DIN
Resolution:	by setting 10-bit
External temperature sensor:	YES, the connection between AIN1/DIN1 and AIN2/DIN2
Type of external sensor:	TC/TZ
Temperature measurement range:	-20 °C to +120 °C
Temperature measurement accuracy:	0.5 °C from the range
Illuminance sensor:	1 to 100 000 Lx
Proximity Sensor:	motion detection at a distance of 0.25 m

### Buttons

Number of control buttons:	4	6	9
Type:	capacitive		
Indication:	coloured illuminated symbol		

### Outputs

Acoustic output:	piezo-changer
------------------	---------------

### Communication

Installation BUS:	BUS
-------------------	-----

### Power supply

Supply voltage/tolerance:	27 V DC, -20/+10 %		
Dissipated power:	max. 0.5 W		
Rated current:	25-43 mA	25-50 mA	25-50 mA
	(at 27 V DC), from BUS		

### Connection

Terminals:	EIB $\varnothing$ 0.6 - 0.8 mm <sup>2</sup>
------------	---------------------------------------------

### Operating conditions


Relative humidity:	max. 80 %
Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20
Overvoltage category:	II.
Pollution degree:	2
Operation position:	any
Installation:	on the wall, observing the conditions for correct installation of the sensor

### Dimensions and weight


Dimensions:	94 x 94 x 41 mm   100 x 100 x 8 mm
Weight:	154 g

- Glass touch controllers with symbols GSB3-XX/S are part of a comprehensive range of glass iNELS control units and can be advantageously used in all projects for example as a part of guest room management system (GRMS).
- The GSB3-40/S, GSB3-60/S, and GSB3-90/S models feature a square design, while the GSB3-240/S, GSB3-260/S, and GSB3-290/S models come in a round design.
- GSB3-40/S, GSB3-240/S is equipped with four, GSB3-60/S, GSB3-260/S six and GSB3-90/S, GSB3-290/S nine touch buttons whose functions can easily modify by the software.
- Engraving of symbols are possible upon a request.
- The glass touch controllers is equipped with an integrated temperature sensor. It is also equipped with analog-to-digital input (AIN/DIN), which can be used to connect potential-free contact or external temperature sensor TC/TZ (for example temperature measurement of the floor).
- Advantages over conventional switches/buttons are saving space, signalling the state of any system output, the ability to measure temperature as well as the ability to connect external buttons or detectors.
- Each button can control any actuator (appliance) in the system. Also, you can assign each button a different function or macro (set of functions). It is therefore possible to use one button to control several appliances at once.
- Glass touch panel is a design component of the iNELS system and is available in elegant black (GSB3-XXX/SB) and white (GSB3-XXX/SW) versions.
- Individual symbols can be illuminated in one of seven colours - red, green, blue, yellow, pink, turquoise and white.
- All versions are in the size of the standard module (94x94 mm) and are designed for mounting into an installation box.
- In addition to all the features in symbol models. The glass touch controllers in the SBP/SWP version are equipped with a proximity sensor, which can light up the symbols by approaching the unit to approx. 0.25 m.
- SWP/SBP models are also equipped with a sensor of ambient light intensity. Based on information from the sensor it can switch backlight of symbols or perform various actions in the iDM3 software, for example also switch the lighting circuits in the room.

### Other variants


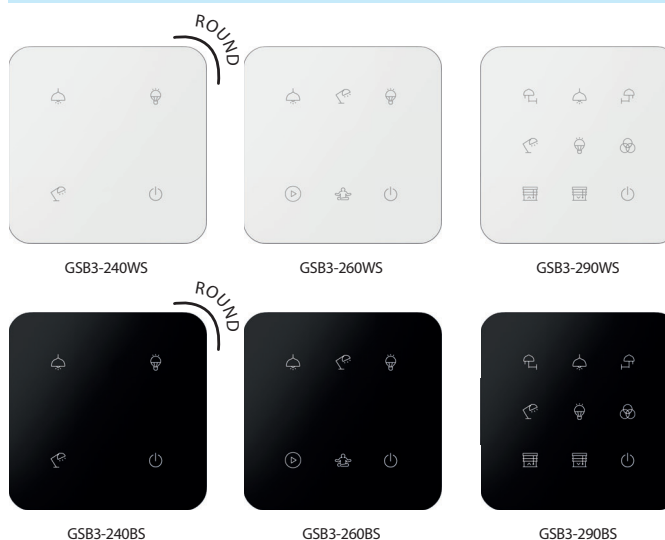




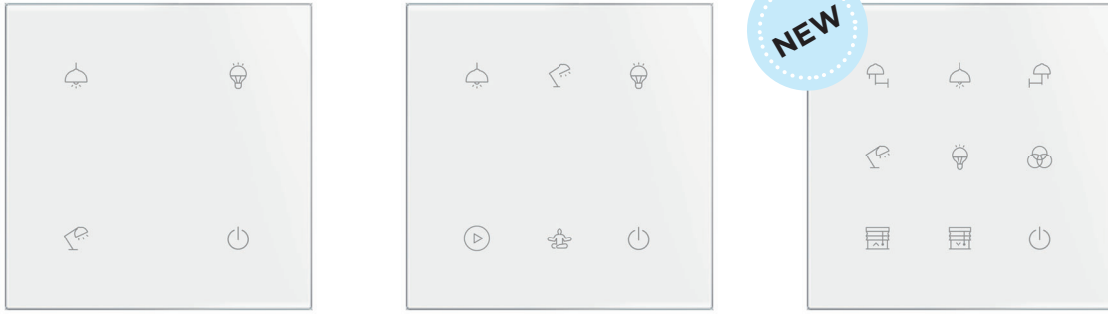

The picture of device is illustrative, the icons (symbols) are configurable by the customer.

Connection

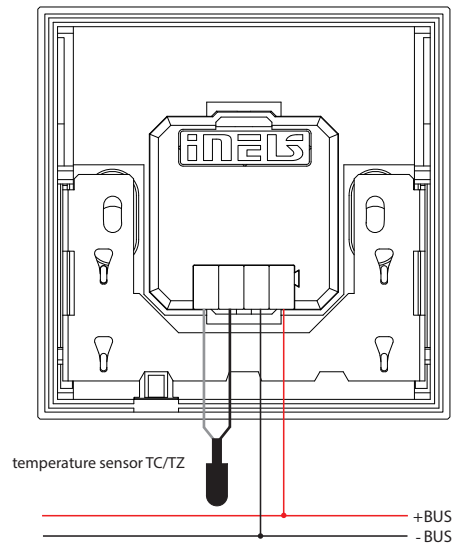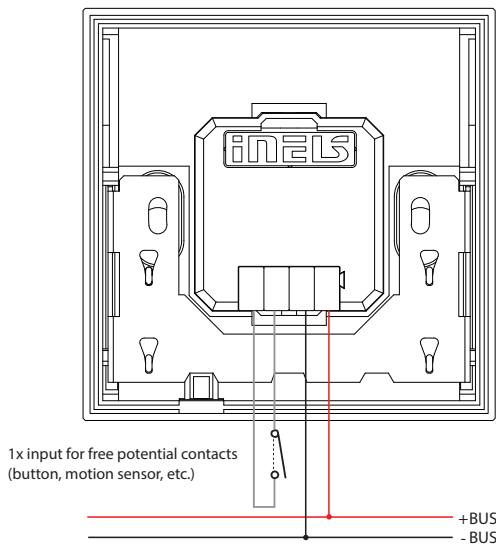





Another view



GSB3-60BS



GSB3-260WS



## EAN code

MSB3-40SS: 8595188191364  
MSB3-40SB: 8595188191371MSB3-40GG: 8595188191388  
MSB3-40GB: 8595188191395MSB3-40CC: 8595188191401  
MSB3-40CB: 8595188191418MSB3-40BB: 8595188191425  
MSB3-60SS: 8595188191449MSB3-60SB: 8595188191456  
MSB3-60GG: 8595188191463MSB3-60GB: 8595188191470  
MSB3-60CC: 8595188191487MSB3-60CB: 8595188191494  
MSB3-60BB: 8595188191500





Technical parameters	MSB3-40	MSB3-60	MSB3-90
<b>Inputs</b>			
Temperature measuring:	YES, built-in temperature sensor		
Scope and accuracy of temp. measurement:	0 to +55 °C; 0.3 °C from the range		
Humidity measurement:	YES		
Humidity measurement range:	0 to 99 % RH		
Inputs:	AIN/DIN		
External temperature sensor:	YES, the connection between AIN1/DIN1 and AIN2/DIN2		
Type of external sensor:	TC/TZ		
Temperature measurement range:	-20 °C to +120 °C		
Temperature measurement accuracy:	0.5 °C from the range		
Illuminance sensor:	1 to 12 000 Lx		
<b>Buttons</b>			
Number of control buttons:	4	6	9
Type:	button		
Indication:	white illuminated button		
<b>Outputs</b>			
Acoustic output:	piezo-changer		
<b>Communication</b>			
Installation BUS:	BUS		
<b>Power supply</b>			
Supply voltage/tolerance:	27 V DC, -20/+10 %		
Dissipated power:	max. 0.5 W		
Rated current:	25-43 mA	25-50 mA	25-50 mA
	(at 27 V DC), from BUS		
<b>Connection</b>			
Terminals:	EIB $\varnothing$ 0.6 - 0.8 mm <sup>2</sup>		
<b>Operating conditions</b>			
Relative humidity:	max. 80 %		
Operating temperature:	-20 to +55 °C		
Storing temperature:	-30 to +70 °C		
Protection degree:	IP40		
Overvoltage category:	II.		
Pollution degree:	2		
Operation position:	any		
Installation:	on the wall, observing the conditions for correct installation of the sensor		
<b>Dimensions and weight</b>			
Dimensions:	94 x 94 x 40 mm		

- Metal switch buttons MSB3-40/XX, MSB3-60/XX and MSB3-90/XX are part of a comprehensive range of iNELS control units and can be advantageously used in all projects.
- MSB3 comes with premium metal plates in the antique copper, satin brass, brushed silver, and graphite black finish.
- MSB3-40/XX is equipped with four, MSB3-60/XX six and MSB3-90/XX nine touch buttons whose functions can easily modify by the software.
- The metal switch button are equipped with an integrated temperature sensor. It is also equipped with analog-to-digital input (AIN/DIN), which can be used to connect potential-free contact or external temperature sensor TC/TZ (for example temperature measurement of the floor).
- Advantages over conventional switches/buttons are saving space, signalling the state of any system output, the ability to measure temperature as well as the ability to connect external buttons or detectors.
- Each button can control any actuator (appliance) in the system. Also, you can assign each button a different function or macro (set of functions). It is therefore possible to use one button to control several appliances at once.
- Metal switch button is a design component of the iNELS system and is available in antique copper, satin brass, brushed silver, and graphite black versions.
- Individual buttons can be illuminated in white.
- MSB3-40/XX, MSB3-60/XX and MSB3-90/XX are designed for mounting into an installation box.
- All versions are in the size of the standard module (94x94 mm).

## Another view





MSB3-90



MSB3-90SS: 8595188189460    MSB3-90GG: 8595188189088    MSB3-90CC: 8595188191319    MSB3-90BB: 8595188191333  
 MSB3-90SP: 8595188189446    MSB3-90GB: 8595188189453    MSB3-90CB: 8595188191326

Connection

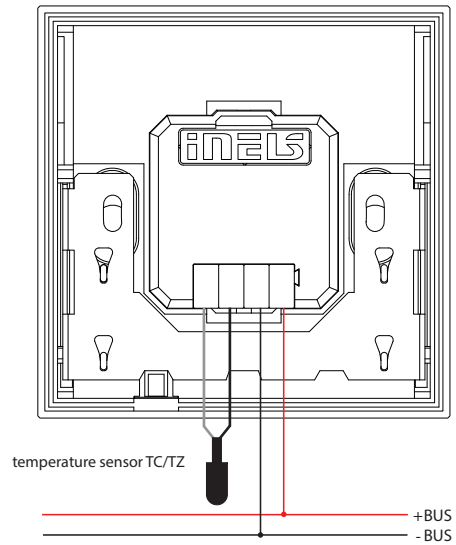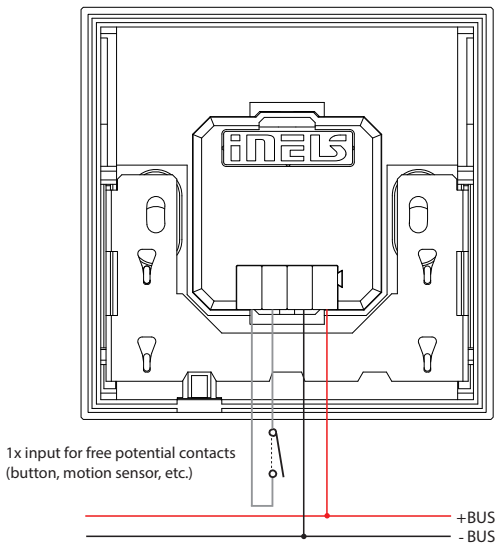

Part number

metal •..... **MSB3-90/xx** .....• type of button

switch •.....

button •.....

iNELS3 •.....

9 buttons •.....

•.....• color of metal

G - Satin brass plate

B - Graphite black plate

S - Brushed silver plate

C - Antique copper plate

G - Satin brass buttons

B - Black buttons

S - Brushed silver buttons

C - Antique copper buttons

Example

MSB3- XX/BB = Graphite Black plate + Black button  
 MSB3- XX/GG = Satin Brass plate + Satin Brass button  
 MSB3- XX/GB = Satin Brass plate + Black button  
 MSB3- XX/SS = Brushed silver plate + Brushed silver button

MSB3- XX/SB = Brushed silver plate + Black button  
 MSB3- XX/CC = Antique copper plate + Antique copper button  
 MSB3- XX/CB = Antique copper plate + Black button



EAN code	
IDRT3-1 white:	8595188149488 (device, cover)
IDRT3-1 ivory:	8595188179614 (device, cover)
IDRT3-1 ice:	8595188179591 (device, cover)
IDRT3-1 pearl:	8595188179621 (device, cover)
IDRT3-1 aluminium:	8595188179584 (device, cover)
IDRT3-1 gray:	8595188179607 (device, cover)

### Technical parameters

### IDRT3-1

#### Inputs

Temperature measuring:	YES, built-in thermo sensor
Range/accuracy of temp. measuring:	0 to +55 °C; 0.3 °C from range
Heating/cooling circuit correction:	±3, ±4 or ±5 °C
Manual control of heating/cooling circuit:	2 x buttons
External temperature sensor:	YES, the connection between AIN1/DIN1 and AIN2/DIN2
Type of external sensor:	TC/TZ
Temperature measurement range:	-20 °C to +120 °C
Temperature measurement accuracy:	0.5 °C from range

#### Communication

Installation:	BUS
Display:	symbol display
Backlight:	YES

#### Power supply

Supply voltage/tolerance:	27 V DC, -20/+10 %
Dissipated power:	max. 0.5 W
Rated current:	20 mA (at 27 V DC), from BUS

#### Connection

Terminals:	0.5 - 1 mm <sup>2</sup>
------------	-------------------------

#### Operating conditions


Operating temperature:	0 to +50 °C
Protection degree:	IP20
Overvoltage category:	II.
Pollution degree:	2
Operation position:	vertical, downward with BUS terminal
Installation:	into installation box

#### Dimensions and weight


Dimensions	
- plastic:	85.6 x 85.6 x 50 mm
- metal, glass, wood, granite:	94 x 94 x 50 mm
Weight:	76 g (without frame)

- IDRT3-1 is a digital wall temperature controller used to regulate the temperature in a room.
- Using the IDRT3-1, it is possible to correct the given heating/cooling circuit within a range of ±3, ±4 or ±5 °C (optional in SW iDM3).
- The temperature controller is equipped with an integrated heat sensor used to measure the room temperature. It is also equipped with two analog digital inputs (AIN/DIN), which can be used to connect two potential free contacts or a single external temperature sensor TC/TZ (e.g. for measuring the floor temperature).
- The display shows the current temperature and after pressing one of two buttons under the display, you can control the desired temperature.
- Readability improves after pressing one of the buttons to activate the backlight.
- Heating/cooling circuit is assigned with a thermo-regulator using iDM3.
- In the case of temperature correction within ±3, ±4 or ±5 °C, this change is valid until the next time mark within the time schedule established in iDM3.
- IDRT3-1 in design LOGUS<sup>90</sup> is intended for mounting into an installation box.

### Connection

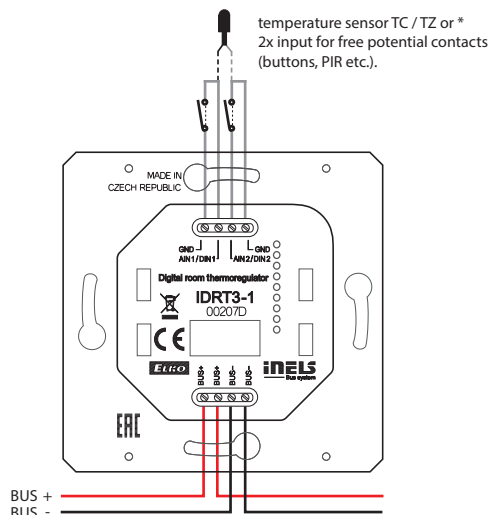

\* The choice is made in iDM3 for each unit separately.



The picture of device is illustrative, the icons (symbols) are configurable by the customer.

EAN code  
GRT3-50/B: 8595188156301  
GRT3-50/W: 8595188156349

**Technical parameters** **GRT3-50**

Inputs	
Temperature measuring:	YES, built-in temperature sensor
Scope and accuracy of temp. measurement:	0 to +55 °C; 0.3 °C from the range
Humidity measurement:	YES
Humidity measurement range:	0 to 99 % RH
Humidity measurement accuracy:	± 3 % relative humidity
Inputs:	2x AIN/DIN
Resolution:	by setting 10-bit
External temperature sensor:	YES, the connection between AIN1/DIN1 and AIN2/DIN2
Type of external sensor:	TC/TZ
Temperature measurement range:	-20 °C to +120 °C
Temperature measurement accuracy:	0.5 °C from the range

Buttons	
Number of control buttons:	5
Type:	capacitive
Indication:	coloured illuminated symbol

Display	
Display:	colored TFT, 20 x 25.5 mm
Resolution:	240 x 240 pixels

Outputs	
Acoustic output:	piezo-changer
Tactile output:	vibration motor

Communication	
Installation BUS:	BUS

Power supply	
Supply voltage/tolerance:	27 V DC, -20/+10 %
Dissipated power:	max. 0.5 W
Rated current:	85 mA (at 27 V DC), from BUS


Connection	
Terminals:	0.5 - 1 mm <sup>2</sup>

Operating conditions	
Relative humidity:	max. 80 %
Operating temperature:	-20 to +55 °C
Storing temperature:	-30 to +70 °C
Protection degree:	IP20
Overvoltage category:	II.
Pollution degree:	2
Operation position:	any
Installation:	on the wall, observing the conditions for correct installation of the thermostat


Dimensions and weight	
Dimensions:	94 x 94 x 36 mm
Weight:	156 g

- Glass room thermo-regulator GRT3-50 is part of a comprehensive range of glass iNELS control units for guest room management system (GRMS) and serves to regulate the temperature in the room.
- GRT3-50 thermo-regulator has a display for displaying the current room temperature and desired temperature. To adjust the required temperature, it is possible to use the touch buttons with symbols "-" and "+".
- GRT3-50 is also suitable for controlling fan coils and fan speed can be easily adjusted by using the touch buttons with symbols.
- Thermo-regulator GRT3-50 also has a further two touch buttons whose function can be adjusted by software, for example fan coil on/off, heating/cooling or comfort temperature for heating or cooling.
- Thermo-regulator is equipped with an integrated temperature sensor for ambient temperature measurement.
- The glass room thermo-regulator is a design component of the iNELS system and is available in elegant black (GRT3-50/B) and white (GRT3-50/W) version.
- Engraving of symbols is possible upon a request.
- Individual symbols can be illuminated in one of seven colours - red, green, blue, yellow, pink, turquoise and white.
- GRT3-50 are designed for mounting into an installation box.

**Connection**

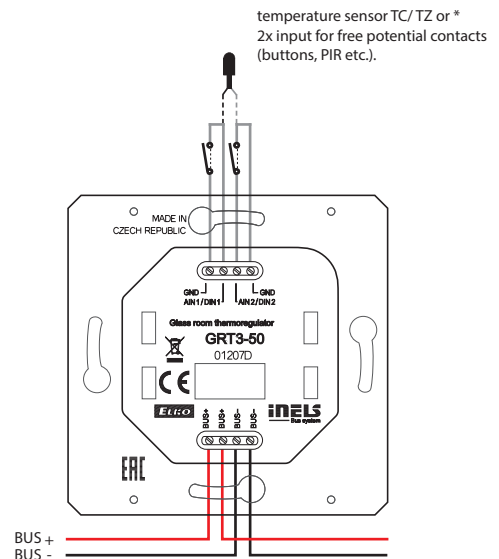

\* The choice is made in iDM3 for each unit separately.

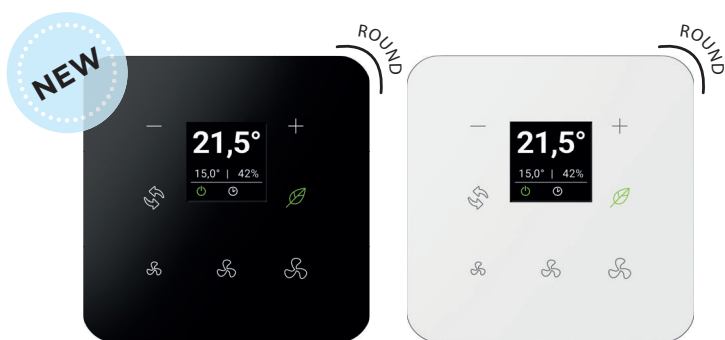


EAN code  
GRT3-70/B: 8595188191548  
GRT3-70/W: 8595188191531  
GRT3-270/B: 8595188191562  
GRT3-270/W: 8595188191555

The picture of device is illustrative, the icons (symbols) are configurable by the customer.


- Glass room thermo-regulator GRT3-70 is part of a comprehensive range of glass iNELS control units for apartments, guest room management system (GRMS) and serves to regulate the temperature in the room.
- GRT3-70 thermo-regulator has a display for displaying the current room temperature and desired temperature. To adjust the required temperature, it is possible to use the touch buttons with symbols "-" and "+".
- GRT3-70 is also suitable for controlling fan coils and fan speed can be easily adjusted by using the touch buttons with symbols.
- Thermo-regulator GRT3-70 also features its touch buttons whose function can be adjusted by software, for example fan coil on/off, heating/cooling or comfort temperature for heating or cooling.
- Thermo-regulator is equipped with an integrated temperature sensor for ambient temperature measurement.
- The glass room thermo-regulator is a design component of the iNELS system and is available in elegant black (GRT3-70/B) and white (GRT3-70/W) version.
- Engraving of symbols is possible upon a request.
- Individual symbols can be illuminated.
- GRT3-70 are designed for mounting into an installation box.

Technical parameters	GRT3-70	GRT3-270
<b>Inputs</b>		
Temperature measuring:	YES, built-in temperature sensor	
Scope and accuracy of temp. measurement:	0 to +55 °C; 0.3 °C from the range	
Humidity measurement:	YES	
Humidity measurement range:	0 to 99 % RH	
Humidity measurement accuracy:	± 3 % relative humidity	
Inputs:	1x AIN/DIN	
Resolution:	by setting 10-bit	
External temperature sensor:	YES, the connection between AIN1/DIN1 and AIN2/DIN2	
Type of external sensor:	TC/TZ	
Temperature measurement range:	-20 °C to +120 °C	
Temperature measurement accuracy:	0.5 °C from the range	
<b>Buttons</b>		
Number of control buttons:	7	
Type:	capacitive	
Indication:	coloured illuminated symbol	
<b>Display</b>		
Display:	colored TFT, 26 x 26 mm	
Resolution:	240 x 240 pixels	
<b>Outputs</b>		
Acoustic output:	piezo-changer	
<b>Communication</b>		
Installation BUS:	BUS	
<b>Power supply</b>		
Supply voltage/tolerance:	27 V DC, -20/+10 %	
Dissipated power:	max. 0.5 W	
Rated current:	85 mA (at 27 V DC), from BUS	
<b>Connection</b>		
Terminals:	0.5 - 1 mm <sup>2</sup>	
<b>Operating conditions</b>		
Relative humidity:	max. 80 %	
Operating temperature:	-20 to +55 °C	
Storing temperature:	-30 to +70 °C	
Protection degree:	IP20	
Overvoltage category:	II.	
Pollution degree:	2	
Operation position:	any	
Installation:	on the wall, observing the conditions for correct installation of the thermostat	
<b>Dimensions and weight</b>		
Dimensions:	94 x 94 x 41 mm	
Weight:	156 g	

### Other variants

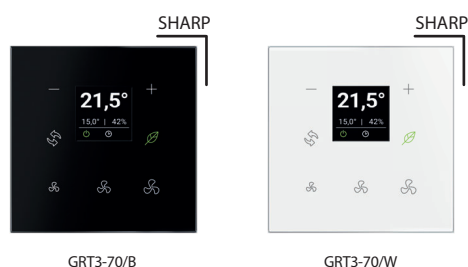

### Connection

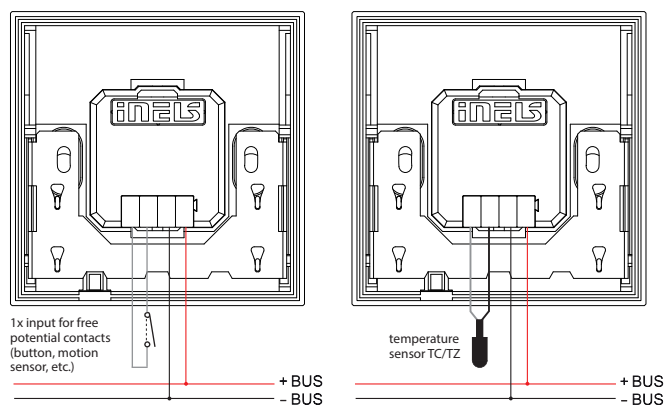


### Another view



GRT3-70/W






EAN code  
 EST4: 8595188199643  
 EMF/S 8595188199650  
 EMF/G 8595188199667  
 EMF/B 8595188199674


Technical parameters		EST4
<b>Hardware / Software</b>		
Hardware	ARM A7 Single-Core 1.2 GHz / 128MB DDR3 Ram / 256 MB Nand flash	
Software:	OS Linux 3.4	
<b>Display</b>		
Type:	IPS 4" 480 x 480 resolution	
Display:	400 cd/m2 luminance	
Touch part:	5 Point capacitive touchscreen	
<b>Power Supply</b>		
Supply voltage/tolerance:	24VDC -or- 48 VDC In	
PoE	POE IEEE 802.3af	
Dissipated power:	Power consumption max. 10W	
<b>Connection</b>		
Standard Interfaces:	(1x) LAN RJ45 10/100Mbps interface (1x) Add-On (optional interface) Port (1x) Digital Out (open collector 5V 100mA) (1x) Digital In	
<b>Optional Interfaces</b>		
	iNELS BUS	
	KNX Twisted Pair (A-KNX)	
	Bticino (SCS) Twisted Pair (A-SCS)	
	RS485 (EIA-485) (RS4)	
	Galvanic isolated RS485 Modbus (A-GMD)	
	VRF mainline communication (A-VRM -or- A-VRR)	
	BLE Bluetooth 5.0 (BCU-S24-BLT -or- BCU-POE-BLT)	
	Zigbee 3.0 (BCU-S24-ZGB -or- BCU-POE-ZGB)	
<b>Built-in Sensors</b>		
Humidity sensor:	range 0% up to 100% RH	
Temperature sensor:	range -40°C up to +125°C	
<b>Operating conditions</b>		
Working temperature:	-10°C – +60°C	
Humidity:	5% – 90% at 25°C	
<b>Dimensions and weight</b>		
Dimensions:	92 x 92 x 29 mm	

- The EST4 offers a feature-rich and versatile solution for control and monitoring applications, with its powerful hardware, user-friendly display, and support for various interfaces and sensors. Its temperature and humidity tolerance make it a reliable choice in different operating environments.
- Featuring a high-quality 4" IPS display with a resolution of 480 x 480 and a luminance of 400 cd/m2, the EST4 offers crisp and clear visuals for an excellent user experience.
- The device runs on Linux 3.4 operating system supporting up to 200 UI objects and 1000 BMS points.
- Equipped with an ARM A7 Single-Core 1.2 GHz processor, 128MB DDR3 RAM, and 256MB Nand flash, ensuring reliable performance for various applications.
- Integrated with essential sensors, the device includes a humidity sensor with a range of 0% up to 100% RH and a temperature sensor covering a range from -40°C up to +125°C, enabling efficient environmental monitoring.
- The EST4 comes with a standard LAN RJ45 10/100Mbps interface, ensuring easy network connectivity for data transfer and communication.
- The EST4 offers a variety of optional interfaces for enhanced connectivity and compatibility. These include RS485, DALI 2, Modbus, VRF, BLE Bluetooth 5.0 and Zigbee 3.0
- The EST4 operates within a working temperature range of -10°C to +60°C.
- The device can be powered by either 24VDC or 48VDC input, and it also supports Power over Ethernet (POE IEEE 802.3af), providing flexibility in power options.
- Configuration, programming and update applications over the Skythings platform.

Connection

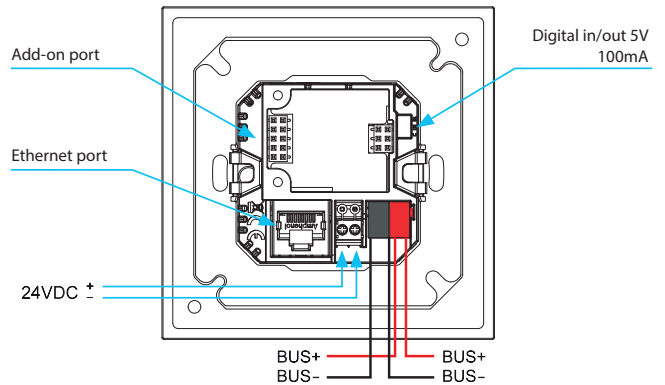

Accessories

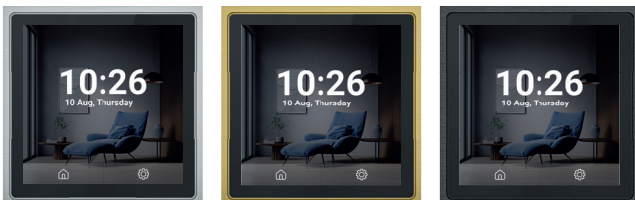

● Silver frame      ● Gold frame      ● Black frame




EAN code  
iNELS TOUCH iA10: 8595188199636  
iNELS TOUCH box: 8595188199681

Technical parameters		iNELS TOUCH iA10
<b>Hardware / Software</b>		
Hardware	Quad-Core 1.2 GHz / 1GB DDR3 Ram / 8GB Nand flash	
Software:	OS Android 7.1 with iNELS application	
<b>Display</b>		
Type:	IPS 10" 1280 x 800 resolution	
Display:	300 cd/m2 luminance	
Touch part:	5 point capacitive touchscreen	
<b>Power Supply:</b>		
Supply voltage/tolerance:	24 VDC	
PoE	PoE IEEE 802.3at (optional w/PSU-TP-POE)	
Dissipated power:	Power consumption max. 13W	
<b>Connection</b>		
Ethernet:	1x LAN RJ45	
Communication speed:	10/100 Mbps interface	
<b>Optional Interfaces</b>		
	iNELS BUS	
	KNX Twisted Pair (A-KNX)	
	Bticino (SCS) Twisted Pair (A-SCS)	
	RS485 (EIA-485) (RS4)	
	Galvanic isolated RS485 Modbus (A-GMD)	
	VRF mainline communication (A-VRM -or- A-VRR)	
	BLE Bluetooth 5.0 (BCU-S24-BLT -or- BCU-POE-BLT)	
	Zigbee 3.0 (BCU-S24-ZGB -or- BCU-POE-ZGB)	
<b>Built-in Sensors</b>		
Humidity sensor:	range 0% up to 100% RH	
Temperature sensor:	range -40°C up-to +125°	
<b>Operating conditions</b>		
Working temperature:	-10°C – +60°C	
Humidity:	5% – 90% at 25°C	
<b>Dimensions and weight</b>		
Dimensions:	307 x 194.6 x 39.5 mm	

- 10" touch panel designed to control iNELS with Android OS. It allows you to install iNELS applications, built-in speakers and a microphone can be used for intercom function.
- 10" touch panel designed to control iNELS units.
- Black aluminum frame chassis in combination with glass.
- Integrated speakers and microphone are primarily designed for intercom operation.
- Connection to the local area network can be done with Ethernet connection with PoE power supply - Active Poe (IEEE 802.3af).
- Android for iNELS applications.
- Update applications over the Internet.
- The panel also includes a cover that also serves as a mounting frame.

### Device description

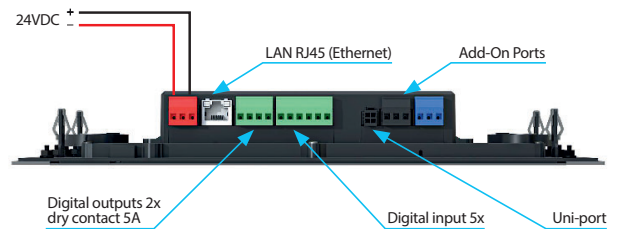

powered by SKY THINGS

powered by INSPIRIA




EAN code  
iNELS Bridge 24V DC: 8595188185097

Technical parameters		iNELS Bridge
<b>Communication</b>		
Communication network:	Ethernet	
Pre Installed software:	Connection Server, Home Assistant, Asterisk, MQTT Broker	
<b>Ethernet</b>		
Connectors:	RJ-45	
Communication speed:	10/100Mb	
Ethernet status indication:	LED link	
Preset IP address (ETH):	DHCP, mDNS	
<b>Power supply</b>		
Version 24V DC:	8-36 V DC/1 A	
<b>Operating conditions</b>		
Operating temperature:	-20 to +55 °C	
Storage temperature:	-25 to +70 °C	
Humidity:	max. 80%	
Degree of protection:	IP20	
Overvoltage category:	II.	
Degree of pollution:	2	
Operating position:	any	
Installation:	DIN rail EN 60715	
Design:	1-MODULE	
Terminal:	max. 2.5 mm <sup>2</sup>	
<b>Dimensions and weight</b>		
Dimensions:	94 x 17.6 x 64mm	
Weight:	72 g	

- iNELS Bridge works as a gateway for connecting third party devices and integrating them into the iNELS environment.
- It is a one module hardware contain powerful linux based computer.
- The unit comes with an option of pre-installed Connection server, Home assistant with iNELS driver and Asterisk.
- The server uses the open Home Assistant platform, which contains more than 1000 existing integrations.
- The connection server is providing a communication environment between iNELS BUS System with the third-party devices, for which their protocols are also translated and submitted.
- iNELS Bridge is equipped ethernet port for fast and easy communication.
- The configuration is happening on its own web interface, where the default IP address is not fixed. (The IP address is assigned from the DHCP server and it's needed to be known when we're connected to the network).
- The device can be powered by 24VDC input, and it also supports Power over Ethernet (Passive POE), providing flexibility in power options.

Device description

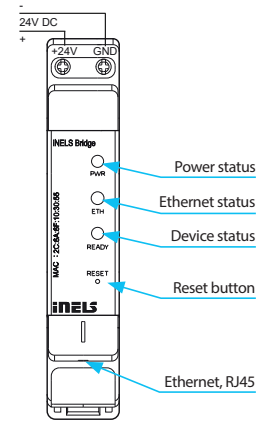


iNELS Bridge 24 V DC

Infrastructure example

**iNELS BRIDGE**

come with option

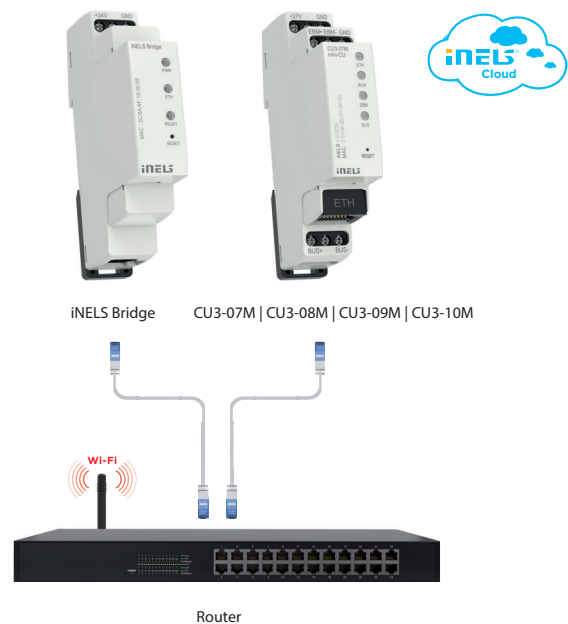




EAN code  
Connection server II.: 8595188185080

Technical parameters	Connection Server II
Power:	USB Type-C PD 2.0 with 9V/2A, 12V/2A, 15V/2A, 20V/2A
Video Output:	HDMI
Audio Output:	3.5mm jack with mic
Processor (CPU):	64bits hexa core processor, Dual Cortex-72, frequency 1.8GHz with qual Cortex-A53, frequency 1.4GHz
Memory (SDRAM):	4 GB
Communication Interface:	Gigabit Ethernet, dual-band 802.11ac WiFi 5, Bluetooth 5.0
Connecting peripherals:	2x USB 3.0, 2x USB 2.0
Dimensions:	92,9 x 65 x 50,6 mm (l,w,h)

- The connection server is providing a communication environment between iNELS BUS System with the third party devices, for which their protocols are also translated and submitted.
- The iNELS application's environment enables us to control all these technologies from just one app.
- If the connection server is present in the installation, then it enables option for controlling the installation by application - lighting, blinds, heating, etc., also IP cameras, intercom, air conditioning.
- It also allows the communication with the domestic voice intercom 2N. It can also arrange the information from the weather station Giom or data from energy meters (electricity, water, gas), which is visualized in clear graphs.
- The device connection server uses the Rock Pi hardware and the apps requires a license relative to the MAC address of the device.
- While connecting with the devices connection server, it's recommended to use an uninterruptible power supply (UPS), which ensures that, there will be no power outage.
- The configuration is happening on its own web interface, where the default IP address is not fixed. (The IP address is assigned from the DHCP server and it's needed to be known when we're connected to the network).

### Infrastructure example

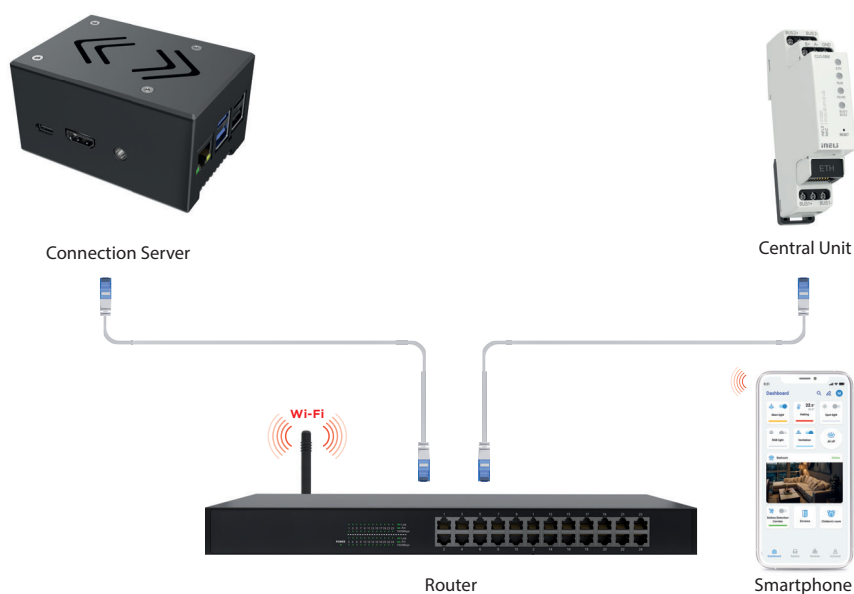



# What is MQTT?

## (Message Queuing Telemetry Transport)




MQTT (Message Queuing Telemetry Transport) is a communication protocol designed for efficient and reliable data transmission between devices or applications over a network. It was developed for use in situations where messages need to be sent with minimal overhead and low latency, which is crucial in limited or unstable network conditions, such as the Internet of Things (IoT) or mobile networks.

### The main features of MQTT

- 1. Publish-Subscribe Model:** MQTT utilizes the "publish-subscribe" model, where clients can publish messages on specific topics, and other clients subscribed to these topics can receive the messages. This model provides a decentralized way of communication and allows a larger number of devices (subscribers) to respond to events from various publishers.
- 2. Low Data Overhead:** The MQTT protocol is designed with efficiency and low data overhead in mind. The message header is very small, reducing bandwidth demands and enabling efficient data transmission even on resource-constrained devices, such as sensors or microcontrollers.
- 3. QoS (Quality of Service):** MQTT allows you to set the level of quality of service for message delivery according to the application's needs. There are three QoS levels:
  - **QoS 0:** It provides "at most once" message delivery, meaning messages may be lost, but they are transmitted with minimal overhead.
  - **QoS 1:** It ensures "at least once" message delivery, but there may be instances of duplicate delivery.
  - **QoS 2:** It guarantees "exactly once" message delivery, which is the most reliable level but requires the most overhead.
- 4. Retained Messages:** MQTT allows the broker to retain the last message on a specific topic. When a new client subscribes to that topic, it immediately receives this retained message. This is useful, for example, in situations where we want to obtain the current state of a device after it connects.
- 5. Easy Connection:** MQTT is designed to make it easy to connect to a broker and start publishing or subscribing to messages. MQTT client implementations are available for various platforms and programming languages, making it easy to integrate them into different applications.
- 6. Broad Support:** MQTT is supported by a wide range of devices and platforms, making it an ideal choice for communication in IoT environments and other applications that require reliable and low-overhead communication.

Thanks to these features, MQTT has become a popular protocol for communication in IoT, sensor networks, telemetry, tracking systems, and other applications where efficient and reliable data transmission over the network is crucial.

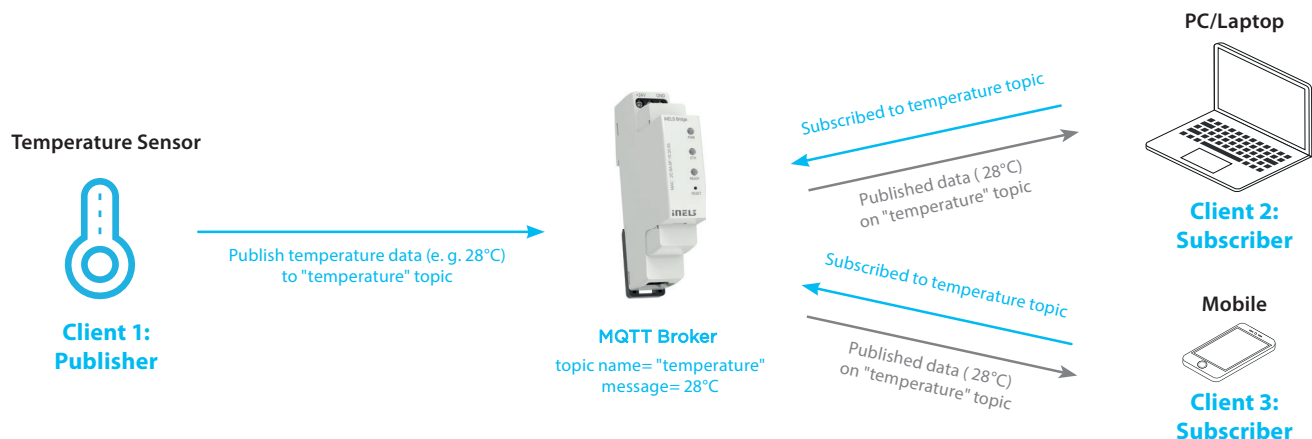

### iNELS supports MQTT

The iNELS gateways, both in wired (CU3-07/08M) and wireless (eLAN-RF-103) versions, have implemented bidirectional MQTT communication. In practice, this means that real-time data from all iNELS system components are sent to the MQTT Broker (iNELS Bridge). Additionally, thanks to the bidirectional communication, these components can be freely controlled. This approach makes the iNELS system open for easy integration into superior BMS (Building Management Systems) and PMS (Property Management Systems). It can be easily connected to third-party systems and implemented into various applications.


#### iNELS Bridge

The revolutionary iNELS Bridge device is unique in that it combines several technologies. Its core feature is the pre-installed MQTT Broker, a software platform that will receive, store, and mediate all MQTT communication within one or even multiple installations.

#### Home Assistant

Home Assistant is a popular environment for creating and managing all automation systems. In this environment, users or administrators can create their own scenarios or automations across different technologies within the property. An integral part of this is a user-friendly application for mobile platforms or computers.



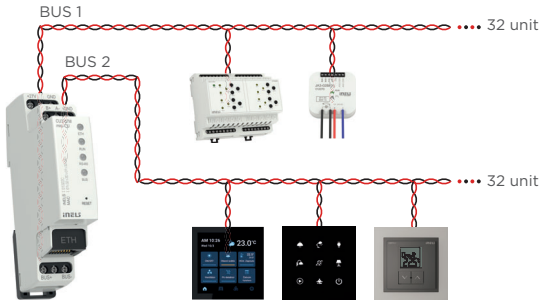

Central unit



iNELS Bridge



eLAN Gateway



MQTT Broker

Home Assistant



Cars + chargers

Appliances



**Miele**  
**SIEMENS**  
**SONOS**  
**iRobot**

... and many others.

**WhatsApp**  
**amazon alexa**  
**Google Home**  
**Works with Apple HomeKit**



Apps and voice control

Protocols

**BACnet** **KNX**  
**Modbus** **M-Bus**  
**ZWAVE**

**protel** **FLOWBOX** **NETX AUTOMATION**  
**Node-RED** **PROMOTIC**  
**Opera** **SKY THINGS**

Platforms

BMS



**EasyIO**  
**niagara framework**  
**iRidi**

**Fronius**  
**NIBE**



HVAC + photovoltaics



Radio



Music

Video-  
telephone

Intercom



Audiozone

**Technical parameters****LARA Radio****Internet Radio**

Supported data transfer formats:	mp3, ogg, acc
----------------------------------	---------------

**Control/Settings**

Front panel:	touchscreen buttons
Communication Ethernet:	via PC setting up and communicating SW LARA Configurator
Button RESET:	restart product/ reset product to factory settings

**Interface ethernet**

Communications interface:	10/100 Mbps
Connector:	RJ45
Max. cable length UTP with power:	50 m

**Display**

Type:	color OLED
Resolution:	128 x 128 pixels
Visible surface:	26 x 26 mm

**Power supply**

Supply:	Passive PoE 24 V DC/1.25 A
Min. input:	1.4 W
Max. input:	26 W (peak at maximum playback performance)

**Amplifier**

Amplifier:	stereophonic class D with digital output control
Max. amplifier output:	2 x 10 W/8 Ω

**Inputs/Outputs**

Microphone:	NO
Audio input:	3.5 stereo jack
Audio output 1:	terminals LINE OUT (used for external amplifier)*
Audio output 2:	terminals OUT L/OUT R (speaker output from int. amplifier)

**Connection**

Terminal block:	0.5 - 1 mm <sup>2</sup>
-----------------	-------------------------

**Other data**

Working temperature:	0 to + 55 °C
Protection degree:	IP20
Overvoltage category:	II.
Pollution degree:	2
Installation:	in an installation box

**Dimensions and weight**



Dimensions:	
- plastic:	85 x 85 x 46 mm
- metal, glass, wood, granite:	94 x 94 x 46 mm
Weight:	209 g (plastic frame)

\* The cable from the LINE OUT terminals must be shielded, max. length should not exceed 5 m.

- A music and internet radio player - all in the dimension of a switch and a luxurious LOGUS<sup>90</sup> design.
- LARA Radio - when connected to the Internet, it can play streaming radio stations and you can store up to 40 of them. But you can also select from thousands of radio stations from across the globe, which provide data for correct connection.
- LARA Radio can play content from an external music source, which can be a smart phone or e.g. an MP3 player. These devices are connected to a 3.5mm stereo jack audio input, located underneath the front panel.
- Touch control is performed on the device front panel (six capacity buttons available), or LARA Dio.
- The basic device settings (network connection, language, audio input) are performed via the display and a simple menu controlled from capacity buttons on the device front cover. Further settings (selection of stations, connection with the server, updating firmware, etc.) are configured via computer and the software LARA Configurator.
- LARA Radio is equipped with an OLED colored display with the size of 1.5". The display also shows basic information about playing music, which also serves the orientation in the menu settings, etc.
- LARA Radio has an integrated amplifier with 2x 10 W output, thus greatly facilitating device installation in places where such output suffices. LARA is used e.g. to provide premium sound to the kitchen, bathrooms, waiting rooms, offices, reception desks, entrance halls, operating rooms or wellness facilities.
- LARA is powered by PoE with maximum voltage level 27 V DC/1000 mA. So connecting and communicating with just one cable (UTP) is a major advantage.
- For LARA, an entire series of accessories is ready for connection (PoE adapters, PoE switches), speakers (in a frame, walls or ceilings) and installation (cables, box, etc.).
- Complies with standards IEEE 802.3u (100BASE-Tx).
- Automatic cable crossing detection of Ethernet cable - MDIX.

**EAN code**

LARA Radio white:	8595188148719
LARA Radio ivory:	8595188149242
LARA Radio ice:	8595188149228
LARA Radio pearl:	8595188149259
LARA Radio aluminium:	8595188149211
LARA Radio grey:	8595188149235

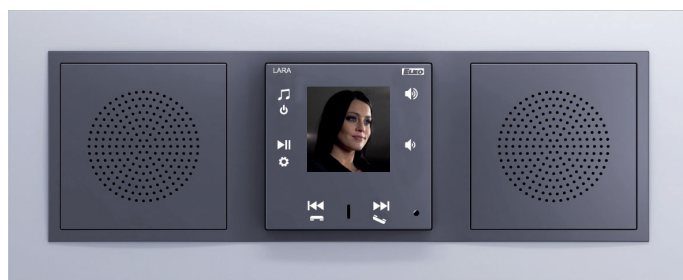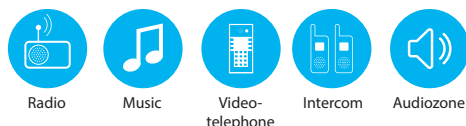

Technical parameters		LARA Intercom
<b>Internet Radio</b>		
Supported data transfer formats:	mp3, ogg, acc	
<b>Control/Settings</b>		
Front panel:	touchscreen buttons	
Communication Ethernet:	via PC setting up and communicating SW LARA Configurator	
Button RESET:	restart product/ reset product to factory settings	
<b>Interface ethernet</b>		
Communications interface:	10/100 Mbps	
Connector:	RJ45	
Max. cable length UTP with power:	50 m	
<b>Display</b>		
Type:	color OLED	
Resolution:	128 x 128 pixels	
Visible surface:	26 x 26 mm	
<b>Power supply</b>		
Supply:	Passive PoE 24 V DC/1.25 A	
Min. input:	1.4 W	
Max. input:	26 W (peak at maximum playback performance)	
<b>Amplifier</b>		
Amplifier:	stereophonic class D with digital output control	
Max. amplifier output:	2 x10 W/8 Ω	
<b>Inputs/Outputs</b>		
Microphone:	YES	
Audio input:	3.5 stereo jack	
Audio output 1:	terminals LINE OUT (used for external amplifier)*	
Audio output 2:	terminals OUT L/OUT R (speaker output from int. amplifier)	
<b>Connection</b>		
Terminal block:	0.5 - 1 mm <sup>2</sup>	
<b>Other data</b>		
Working temperature:	0 to + 55 °C	
Protection degree:	IP20	
Overvoltage category:	II.	
Pollution degree:	2	
Installation:	in an installation box	
<b>Dimensions and weight</b>		
Dimensions:		
- plastic:	85 x 85 x 46 mm	
- metal, glass, wood, granite:	94 x 94 x 46 mm	
Weight:	209 g (plastic frame)	

\* The cable from the LINE OUT terminals must be shielded, max. length should not exceed 5 m.

- LARA Intercom offers users 5 different functions and expands even more options to Lara Radio - music players and internet radio stations within the range of LOGUS<sup>90</sup> switch designs.
- LARA Intercom provides an extra functionality and videophone intercom.
- Thanks to videophone function, now it is possible to have a voice communication between LARA and the sound of the door (IP Intercom), so with someone visiting and standing in front of the house, we can see that on LARA display as part of this function which increases the security feeling and safety besides of course, the comfort for the user.
- LARA Intercom is equipped with an OLED colored display with the size of 1.5", which is used to transfer images and sounds from the door camera properly. The display also shows basic information about playing music, which also serves the orientation in the menu settings, etc.
- The intercom function can also be used for communications between all the family members throughout the whole house, thanks to two way voice communications possibilities between different LARA units.
- LARA Intercom continues to offer three functions that are also supported by LARA Radio - when connected to the Internet, it can play streaming radio stations and you can store up to 40 of them. But you can also select from thousands of radio stations from across the globe, which provide data for correct connection.
- LARA Intercom can play content from an external music source, which can be a smart phone or e.g. an MP3 player. These devices are connected to a 3.5mm stereo jack audio input, located underneath the front panel. You can also use LARA for streaming your favorite music from Spotify Premium.
- Touch control is performed on the device front panel (six capacity buttons available), or LARA Dio.
- The basic device settings (network connection, language, audio input) are performed via the display and a simple menu controlled from capacity buttons on the device front cover. Further settings (selection of stations, connection with the server, updating firmware, etc.) are configured via computer and the software LARA Configurator.
- LARA Intercom has an integrated amplifier with 2x 10 W output, thus greatly facilitating device installation in places where such output suffices. LARA is used e.g. to provide premium sound to the kitchen, bathrooms, waiting rooms, offices, reception desks, entrance halls, operating rooms or wellness facilities.
- LARA is powered by PoE with maximum voltage level 27 V DC/ 1000 mA. So connecting and communicating with just one cable (UTP) is a major advantage.
- For LARA, an entire series of accessories is ready for connection (PoE adapters, PoE switches), speakers (in a frame, walls or ceilings) and installation (cables, box, etc.).
- Complies with standards IEEE 802.3u (100BASE-Tx).
- Automatic cable crossing detection of Ethernet cable - MDIX.

#### EAN code


LARA Intercom white:	8595188149389
LARA Intercom ivory:	8595188149419
LARA Intercom ice:	8595188149396
LARA Intercom pearl:	8595188149426
LARA Intercom aluminium:	8595188149372
LARA Intercom grey:	8595188149402

Touchscreen operation




Applications control

Operations, using the application for, LARA Dio and iNELS Home Control for Android and iOS smartphones and tablets.

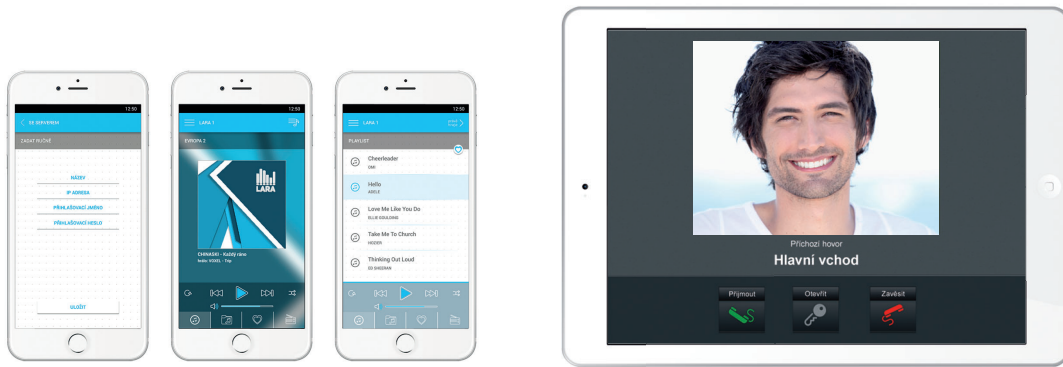

Wiring example

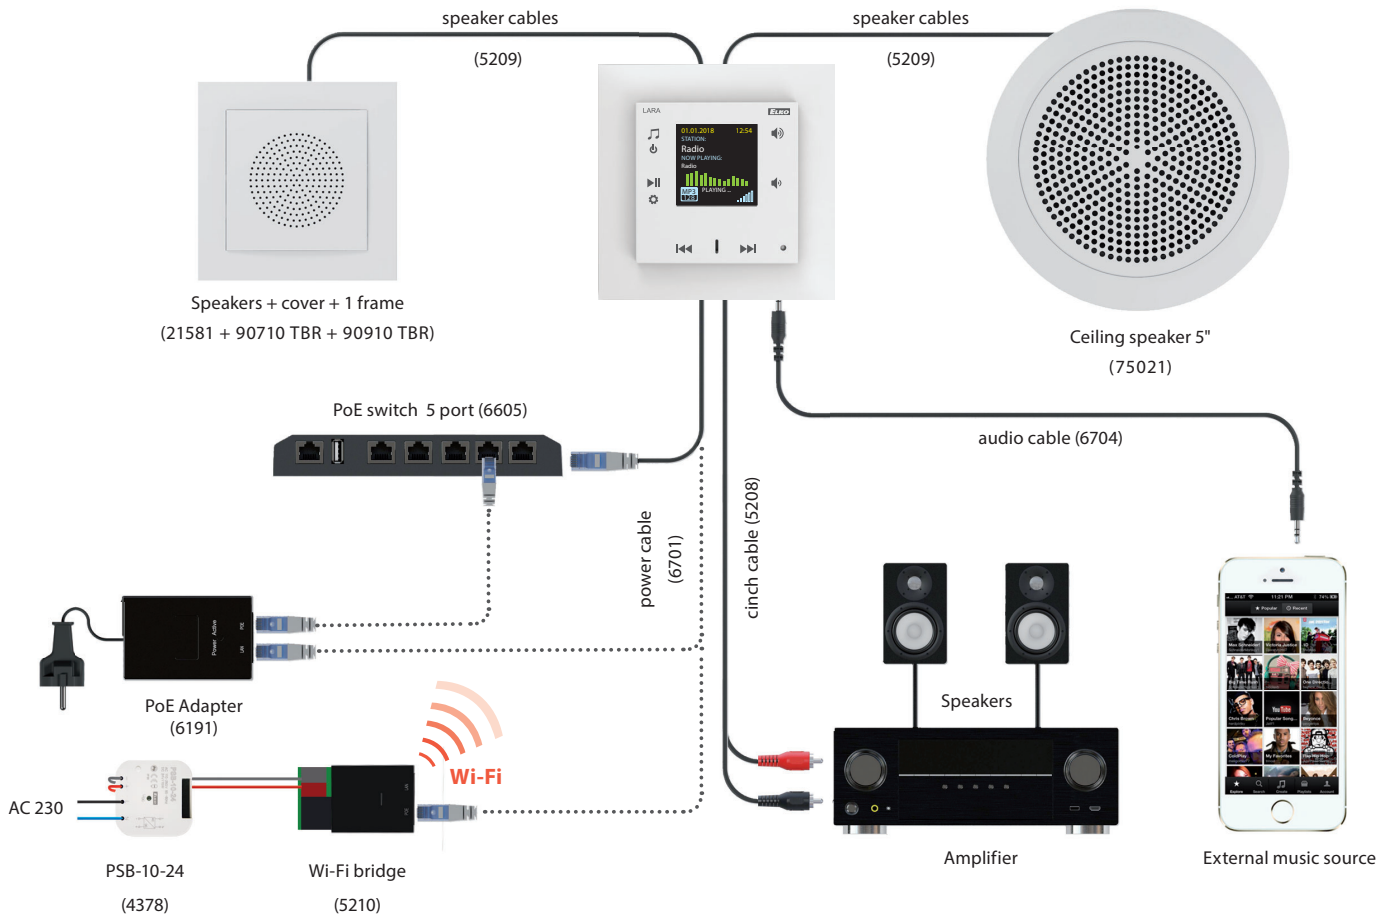

Speakers and cables



**AUX CABLE LARA (LARA CINCH CABLE)**  
Used to connect LARA with exter. amplifier. Reduction 4pin from LARA LINE OUT to 2x CINCH plug into amplifier, length 2 x 20 cm.

5208



**POWER SUPPLY (PSB-10-24)**  
Switching stabilized power supplies with fixed output voltage, intended for mounting into an installation box (e.g. KU-68). PSB-10-24 - stabilized power supply 24V/10 W.

4378



**AUX CABLE LARA (LARA AUDIO CABLE)**  
Used to connect LARA with external music source (smart phone mp3 player). The length is 20 cm terminated with 2x stereo jack 3.5 mm.

6704



**CEILING SPEAKER**  
Speaker is suitable for the installation in suspended ceilings and hollow walls. Mounting hole diameter 143 mm, Power 8 W, 32 Ω speaker impedance.

75021  
CBR



**SURFACE SPEAKER**  
Two-way speaker intended for mounting in a ceiling or on the walls: Power 15 W, 32 Ω speaker impedance, dimensions 270x183x37 mm. Color: White

75106  
CBR



**NETWORK CABLE, 0.2 m**  
Flat white LAN cable CAT5, length 20 cm, terminated with 2x RJ45 plugs.

6702



**NETWORK CABLE, 1 m**  
Flat white LAN cable CAT5, length 1 m, terminated with 2x RJ45 plugs.

6700

Power supply and network



**WI-FI BRIDGE**  
Used for LARA wireless connection via WiFi network.

5210



**PoE SWITCH - 5x RJ45**  
Provides LAN connectivity and PoE power supply for up to 5 x LARA.

6605



**PoE SWITCH - 8x RJ45**  
Provides LAN and connected PoE of up to 8x LARA. In addition to the 24 V PoE also offers a 48 V PoE for the power supply of 2N.

6606



1-FRAME

90910  
TBR



2-FRAME

90920  
TBR



3-FRAME

90930  
TBR



4-FRAME

90940  
TBR



5-FRAME

90950  
TBR



SURFACE MOUNT BOX

10976  
ABR



INSTALLATION BOX 1 GANG (KP 67/2)

6705



INSTALLATION BOX 2 GANG (KP 64/2)

6706



INSTALLATION BOX 3 GANG (KP 64/3)

6707



INSTALLATION BOX 4 GANG (KP 64/4)

6708



INSTALLATION BOX 5 GANG (KP 64/5)

6709



INSTALLATION BOX 1 GANG (KP 64/LD)

6710



INSTALLATION BOX 2 GANG (KP 64/2L)

6711



INSTALLATION BOX 3 GANG (KP 64/3L)

6712



INSTALLATION BOX 4 GANG (KP 64/4L)

6713



INSTALLATION BOX 5 GANG (KP 64/5L)

6714



UNIVERSAL BOX 1068-02

6716



UNIVERSAL BOX KUH 1/L NA

6717

Power sets



**POWER SUPPLY PoE + WiFi INTO OR THE BOX**  
WiFi bridge with PoE and power supply into an installation box. Power supply 230 V.

5224



**POWER SUPPLY PoE INTO A BOX**  
PoE injector with power supply intended for an installation box. Power supply 230 V.

5226



**PoE SUPPLY**  
Power injector with plug-in adapter 230 V.

5225



**POWER SUPPLY PoE + WiFi**  
WiFi bridge with PoE plug in adapter 230 V.

5227





















The application allows easy control of connected devices through wireless and wired gateways, such as socket switching, dimming lights, controlling blinds or garage doors, managing heating circuits, and compatible air conditioning. It also displays available values, such as temperature, status of motion detectors, windows, doors, or flood detectors, as well as the current status of all controlled devices.

Newly, the application can be installed on tablets, where all control options are fully preserved, just like in the standard application. The user-friendly Dashboard on the tablet enables users to view frequently used devices, previews of connected cameras, and created scenes. Users can quickly and easily control multiple devices at once with a single click. Furthermore, it is now possible to integrate SIP-enabled Intercoms, allowing call notifications and door unlocking from anywhere in the world. Another new feature includes receiving notifications related to units connected to the account. With the new iNELS mobile application, we are opening a completely new stage, expanding the functions and integration possibilities of the iNELS system.

In addition to the iNELS mobile application, there is also the inels.cloud platform available. This website allows users to control devices connected to inels BUS and RF gateways through the cloud. The platform offers advanced features, including the ability to configure custom Dashboards, view historical device data, and conditionally interconnect RF and BUS units. This feature allows users to set conditions to respond to specific events or interconnect devices with each other. Another useful function is push notifications, which inform users about important events or device statuses. With the inels.cloud platform, user management is also possible, enabling account owners to add additional users and restrict their rights to control specific devices.

Thanks to these new updates and features, the iNELS mobile application and inels.cloud platform expand the possibilities and integration options of the iNELS system, providing users with an enhanced and seamless smart home experience.


Electroinstallation		
Wireless	BUS	
		Lighting control •
		Garage doors and gates •
		Switching appliances •
		RGB bulbs and LED strips •
		Scenes •
		Detectors/sensors •
		Heating •
		Air conditioning •
		Recuperation •
		Cameras •
		Weather station •
		Intercoms •
		Home appliances •
		Google Home •
		Amazon Alexa •
		Automation •
		Notification •
		Favourites/overview •
		Log history •
		Weather data •
		Users management •






## Conditions

Unlimited automation options.

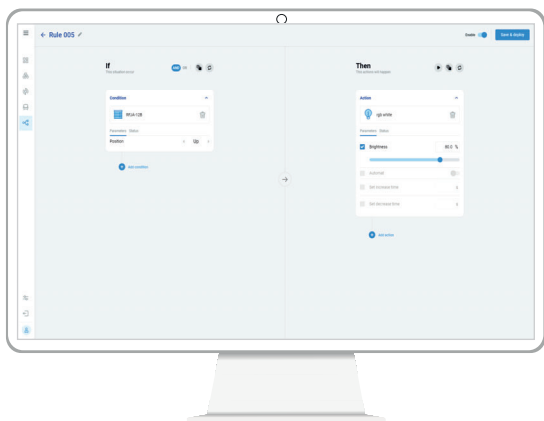


## User management

Control of user accounts.

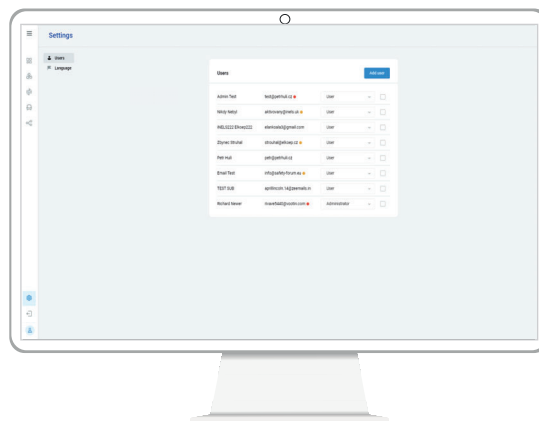


## Dashboard

Device overview with the option to view event history.

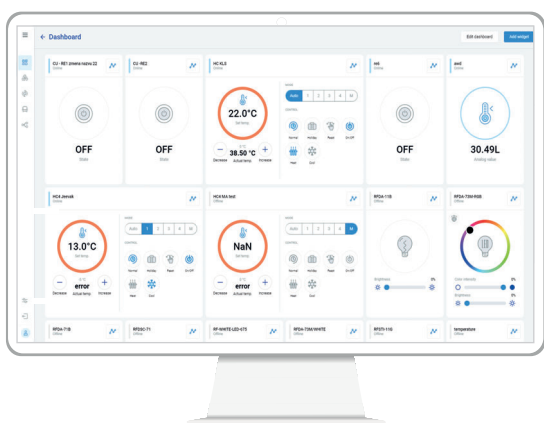

## Scenes

Group device control.

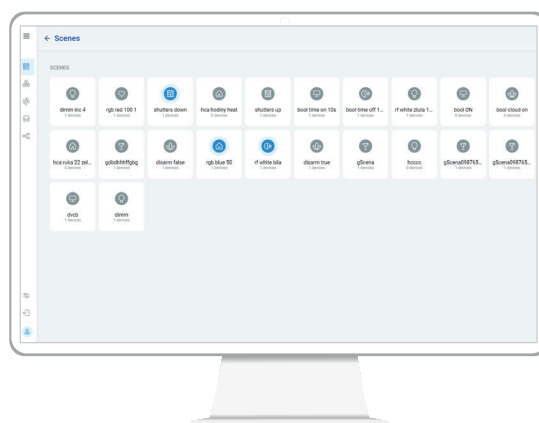


## Dashboard

Absolute control over the state of all technologies.




## Device list

Control the device from anywhere.

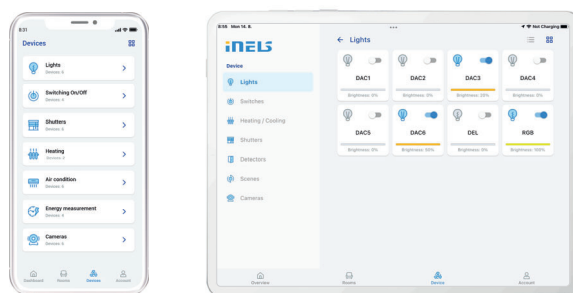

## Rooms management

Settings according to individual rooms.

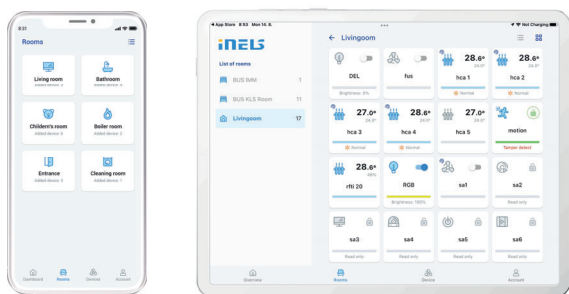

## Colour setting

Easy adjustment of the light scene with one touch - switching, dimming, colour.





EAN code  
 Telva-2 230V, NC: 8595188181976  
 Telva-2 230V, NO: 8595188181969  
 Telva-2 24V, NC: 8595188181990  
 Telva-2 24V, NO: 8595188181983

Technical parameters	TELVA 230V		TELVA 24V	
	NO	NC	NO	NC
Operating voltage:	230 V, 50/60 Hz		24 V, 50/60 Hz	
Switching current max:	300 mA		500 mA	
Operating current:	13 mA		100 mA	
Closing/opening time:	3–5 min		3–5 min	
Power input:	2.9 W		2.4 W	
Protection:	IP54		IP54	
Settings:	4 mm (0.16")		4 mm (0.16")	
Stopping force:	90–110 N		90–110 N	
Cable length:	800–1000 mm (31–39")		800–1000 mm (31–39")	
Connecting wire:	2 x 0.75 mm <sup>2</sup>		2 x 0.75 mm <sup>2</sup>	
Media temperature:	-5 °C to 60 °C (23 to 140 °F)		-5 °C to 60 °C (23 to 140 °F)	
Colour:	white RAL 9003		white RAL 9003	
Dimensions h/w/d:	63 x 42 x 45 mm (2.5 x 1.7 x 1.8")		63 x 42 x 45 mm (2.5 x 1.7 x 1.8")	
Connection size:	M30 x 1.5 mm (1.2" x 0.06")		M30 x 1.5 mm (1.2" x 0.06")	

- Thermdrive is intended for opening or closing valves in heating, cooling or air conditioning systems. It is also suitable for use in a floor heating or ceiling cooling manifolds.
- Available in NO (open without voltage), NC (closed without voltage) and for 230 V and 24 V.
- The internal principle of operation of thermdrive mechanism = its movement so that the valve opens/closes is provided by an electric heating element with expansion material, which expands due to temperature changes in the supply voltage.
- Thermdrive is maintenance-free and works completely silently.
- Thermdrive is fitted with a metal nut M30 x 1.5, thanks to which it becomes a 100% fixed part of the valve with this corresponding thread size after installation.
- The stated nut size predetermines the use of a thermocouple with valves from manufacturers such as Herz, HoneyWell, Danfoss, Oventrop and others.

- **Telva thermo drive:**
  - is characterized by absolutely quiet and maintenance-free operation
  - is designed for installation - control of heating and cooling systems
  - method of mounting the actuator on the controlled valve using an M30 x 1.5 nut
  - any working position

- **Type of use:**
  - Floor heating – the RFTC-50/G wireless controller measures the room temperature and, based on the set program, sends a command to the RFS-66M switching element to open/close the TELVA thermo drive on the distributor.

**AN-I | Internal antenna**



- into plastic switchboard
- rod angle, without cable
- sensitivity 1 dB
- the internal antenna is included in the standard package

EAN code  
 Internal antenna AN-I: 8595188161862

**AN-E1 | External antenna**



- for mounting into metal switchboard
- cable length 3m
- sensitivity 5 dB
- the external antenna AN-E is supplied on request only

EAN code  
 External antenna AN-E: 8595188190121



EAN code			
TC-0:	8595188110075	TZ-0:	8595188110591
TC-3:	8595188110617	TZ-3:	8595188110600
TC-6:	8595188110082	TZ-6:	8595188110594
TC-12:	8595188110099	TZ-12:	8595188110587
		Pt100-3:	8595188136136
		Pt100-6:	8595188136143
		Pt100-12:	8595188136150

- Thermister temperature sensors are made of Negative Temperature Coefficient (NTC) embedded in a PVC or metal sleeve with a thermally-conductive sealer.
- **Sensor TC**
  - lead-in cable to sensor TC is made of wire CYSY 2D x 0.5 mm/0.02".
- **Sensor TZ**
  - cable VO3SS-F 2D x 0.5 mm/0.02" with silicone insulation for use in high temperature applications.
  - silicone insulation for use in high temperature applications.
- **Sensor Pt100**
  - shielded silicon 2x 0.22 mm<sup>2</sup> (AWG 21), shielding connected with a case.
- temperature sensors can be connected directly to the terminal block
- cable lengths can not be changed, connected or modified.

**Technical parameters**

	TC	TZ	Pt100
Range:	-20 to +80 °C	-40°C to +125 °C	-30°C to +200 °C
Scanning element:	NTC 12K	NTC 12K	Pt100
Tolerance:	±(0.15 °C + 0.002[t])	±(0.15 °C + 0.002[t])	±(0.3 °C + 0.005[t])
In air/in water:	(τ0.5) ≤ 18 s	(τ65) 62 s/8 s	(τ0.5) -/7 s
In air/in water:	(τ0.9) ≤ 48 s	(τ95) 216 s/23 s	(τ0.9) -/19 s
Cable material:	PVC unshielded, 2x 0.25 mm <sup>2</sup>	PVC	shielded silicone 2 x 0.22 mm <sup>2</sup>
Terminal material:	polyamid	stainless steel	copper
Protection degree:	IP67	IP67	IP67
Electrical strength:	2500 VAC	2500 VAC	2500 VAC
Insulation resistance:	> 200 MΩ at 500 VDC	> 200 MΩ at 500 VDC	> 200 MΩ at 500 VDC

**Types of temperature sensors:**

	TC-0	TZ-0	-
- length:	100 mm	110 mm	-
- weight:	5 g	4.5 g	-
	TC-3	TZ-3	Pt100-3
- length:	3 m	3	3 m
- weight:	70 g	106 g	68 g
	TC-6	TZ-6	Pt100-6
- length:	6 m	6 m	6 m
- weight:	130 g	216 g	149 g
	TC-12	TZ-12	Pt100-12
- length:	12 m	12 m	12 m
- weight:	250 g	418 g	249 g


τ65 (95): time, which sensor needs to heat up on 65 (95) % of ambient temperature of environment, in which is located.

**Resistive values of sensors in dependance on temperature**

Temperature (°C)	Sensor NTC (kΩ)	Sensor Pt100 (Ω)
20	14.7	107.8
30	9.8	111.7
40	6.6	115.5
50	4.6	119.4
60	3.2	123.2
70	2.3	127.1

Tolerance of sensor NTC 12 kΩ is ± 5% by 25 °C/77 °F. Long-term resistance stability by sensor Pt100 is 0.05% (10 000 hours).

**Diagramm of sensor warm up via air**

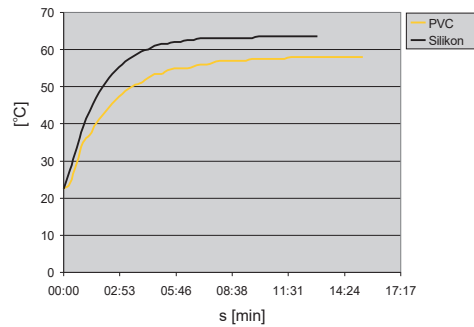

PVC - reaction to water temperature from 22.5 °C to 58°C. Silicone - reaction to water temperature from 22.5°C to 63.5°C.

**Sensor photo**

TC






TZ



Pt100



**Drawing**



The BUS electro installation iNELS BUS System is a unique solution for electrical installation in the implementation of new projects of houses, villas, apartment buildings, office buildings, hotels, restaurants, wellness centres or perhaps even warehouse or production hall.

The ability to deploy this solution in such a wide variety of different buildings with various purposes and uses lies in its modularity. Thanks to the modular design, the system is very flexible and allows on the one hand, a solution of single-purpose tasks such as control of lighting in restaurants, and on the other hand, solving complex control systems for heating, ventilation, cooling, lighting and shading of office buildings. A complete range of control units designed from glass for management of hotel rooms is in the market unique. Thanks to its modularity is very easy to customize the size of the system and to that effect create a cost effective solution. Smart homes and buildings are accompanied by three basic ideas, namely savings, comfort and safety, the first two ideas may at first glance contradict each other. However, the main objective of smart home or building equipped with the iNELS solution is to attain the optimum indoor environment while achieving the most efficient operation of all system. In homes and buildings the optimal internal environment is very important because people nowadays spend up to 80% of their time inside buildings. It is also shown that indoor environments, where we talk about thermal comfort, lighting comfort and indoor air quality significantly affect the mood and the effectiveness of people.

The iNELS system allows connection of wide range of sensors (temperature, light intensity, carbon dioxide, humidity, and pressure) and detectors (movement, opening doors and windows, gas leakage, smoke, flooding) whose values are constantly evaluated. At the same time iNELS allows the connection of all the technologies that are installed in the building, which continued to significantly increase operational efficiency or comfort, for example; in the case of integrating the guest room management system with the receptionist Fidelio system, which automatically during check-in, sends the room requests for execution, a welcome scene (optimum temperature, comfortable lighting scene, music etc.).

### What are the benefits of BUS controlling?

- Save energy by regulating lighting and heating properly
- Control of blinds, awnings, exterior or internal window shutters
- Dimming lights, lighting scenes
- control of appliances or electrical devices
- Control access gates, garage doors
- Logical and central functions (exit button, ...)
- Manual and automatic control mode
- Preventing undesirable opening of a window or a door
- Responding to the movement of people (authorized and unauthorized)
- Remote monitoring via smartphone, tablet or laptop
- Possibility to control via the iNELS Touch Panel 10"
- Integration of third-party devices (cameras, air conditioning, ...)



### More systems can be controlled by iNELS:



Push-button wall controller




Glass wall controller



Temperature control



Cloud control

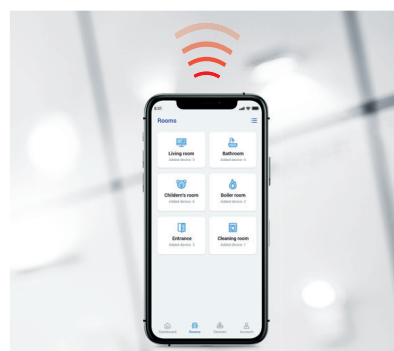

Smartphone

Problematic choice of suitable relay contact for a particular load switched with a product is described below. Mostly we experience problems with incorrect choice of load (meaning incorrect relay for a particular load) which results in permanent switching of contact (sealing) or damage on relay contact – which then results in malfunction. What load can you use? Detailed types of load according to standard EN 60947 are described in charts below – categories of use.

Category of use	Typical use	EN
AC current, $\cos\phi = P/S$ (-)		
AC-1	Non-inductive or slightly inductive load, resistance furnace Includes all appliances supplied by AC current with power factor ( $\cos\phi$ ) $\geq 0.95$ Examples of usage: resistance furnace, industrial loads	60947-4
AC-2	Motors with slip-ring armature, switching off	60947
AC-3	Motors with short-circuit armature, motor switching when in operation This category applies to switching off motors with short-circuit armature while in operation. While switching, contactor switches current which is 5 up to 7 times rated current of motor.	60947-4
AC-4	Electro-motors with short-circuit armature: start up, braking by backset, changeover	60947
AC-5a	Switching of electrical gas-filled lights, fluorescent lights	60947-4
AC-5b	El. bulb switching Enables low contact loading due to resistance of cold fiber is many times smaller than the one of hot fiber.	60947-4
AC-6a	Switching of transformers	60947-4
AC-6b	Switching of capacitors	60947-4
AC-7a	Switching low inductive loads of home appliances and similar applications	60947
AC-7b	Load of motors for home appliances	60947
AC-8a	Switching of hermetically sealed motors of cooling compressors with manual reset switches against overload Hermetically sealed cooling compressors have to be placed in one box without external shaft or shaft padding and motor must operate with cooling liquid	60947
AC-8b	Switching of hermetically sealed motors of cooling compressors with manual reset switches against overload Hermetically sealed cooling compressors have to be placed in one box without external shaft or shaft padding and motor must operate with cooling liquid	60947
AC-12	Switching of semiconductor loads with separation transformers	60947-5
AC-13	Switching of semiconductor loads with separation transformers	60947-5-1
AC-14	Switching of low electro-magnetic loads (max.72 VA)	60947-5-1
AC-15	Management of alternating electro-magnetic loads This category applies to switching inductive loads with input for closed electro-magnetic circuit higher than 72 VA Use: switching coils of contactors	60947-5
AC-20	Connecting and disconnecting in unloaded states	60947-3
AC-21	Switching resistive loads, including low loading	60947-3
AC-22	Switching of mixed resistive and inductive loads, including low overloading	60947-3
AC-23	Switching of motor loads or other high inductive loads	60947-3
AC-53a	Switching of motors with short-circuit armature with semiconductor contactors	60947

Note: Category AC 15 replaces formerly used category AC 11

DC current,  $t = L/R$  (s)

DC-1	Non-inductive or low inductive load, resistive furnaces	60947-4
DC-3	Shunt motors: start-up, braking by backset, reversion, resistive braking	60947-4-1
DC-5	Series motor: start-up, braking by backset, reversion, resistive braking	60947-4-1
DC-6	Non-inductive or low inductive loads, resistive furnaces – el. bulbs	60947-4-1
DC-12	Management of resistive loads and fixed loads with insulation by opto-electric element	60947-5-1
DC-13	Switching of electromagnets	60947-5-1
DC-14	Switching of electromagnetic loads in circuits with limiting resistor	60947-5-1
DC-20a(b)	Switching and breaking without load(a: frequent switching ,b: occasional switching)	60947-3
DC-21a(b)	Switching ohmic loads including limiting overloading (a: frequent switching ,b: occasional switching)	60947-3
DC-22a(b)	Switching of compound ohmic and inductive loads including limited overloads (e.g. shunt motors) (a: frequent switching, b: random switching)	60947-3
DC-23	Switching of highly inductive loads (e.g. series motors)	60947-3

How can you distinguish for which load is our product (relay) designated?

Our company records this information on a products and also in our catalogue, instruction manual and other promotional and technical material (website etc.).

It is important to realize that it is not always possible to point out load because of lack of information about the device (user cannot measure  $\cos\phi$ ) or it is not possible because of inconsistency of parameters of switched device. Manufacturer of relays records always guaranteed parameters in ideal conditions which are done by a norm (temperature, pressure, humidity, etc.) and reality can be in a lot of cases different. Category of use (classification) of a particular relay is done by material of output contacts.

Basic types of materials which are used for production of contacts for high-performance relay are:



















- AgCd – suitable for switching ohmic loads. Before of harmfulness of Cd, this type of contact is remitted.
- AgNi – designated for switching resistive loads, good quality switching and conducting (contact doesn't oxidate) small currents/voltages, it is not designated for surge currents and loads with inductive component.
- AgSn or AgSnO<sub>2</sub> – suitable for switching loads with inductive component, not suitable for switching small currents/voltages, it is more resistive to surge currents, suitable for DC voltage switching, less suitable for switching loads of ohmic type.
- Wf (wolfram)-special contact designated for switching surge currents with inductive component.
- with gold (AgNi/Au)- Used for "improving" contacts for low currents/ voltages , prevents oxidation.





















Minimum load		
Relay contact	mV	V/mA
AgSnO <sub>2</sub>	1000	10/100

Minimum load		
Relay contact	mV	V/mA
AgNi	300	5/10



















## GCR3-11, GCH3-31, GMR3-61, SA3-02B, SA3-06M, WMR3-21, SA3-014M, JA3-014M, RC3-610M/DALI, IOU3-108M

Type of load	 $\cos \varphi \geq 0.95$								
Contact material	AC1	AC2	AC3	AC5a uncompensated	AC5a compensated	AC5b	AC6a	AC7b	AC12
AgSnO <sub>2</sub> contact 8 A	250 V/8 A	250 V/2.5 A	250 V/1.5 A	230 V/1.5 A (345 VA)	230 V/1.5 A (345 VA) till max output C=14uF	250 W	X	250 V/1 A	250 V/1 A
Type of load									
Contact material	AC13	AC14	AC15	DC1	DC3	DC5	DC12	DC13	DC14
AgSnO <sub>2</sub> contact 8 A	250 V/3 A	250 V/3 A	250 V/3 A	24 V/4 A	24 V/2 A	24 V/1.5 A	24 V/4 A	24 V/1 A	24 V/1 A



















## LBC3-02M, SA3-04M, SA3-022M (RE7 - RE-10), SA3-01B

Type of load	 $\cos \varphi \geq 0.95$								
Contact material	AC1	AC2	AC3	AC5a uncompensated	AC5a compensated	AC5b	AC6a	AC7b	AC12
AgSnO <sub>2</sub> contact 16 A	250 V/16 A	250 V/3 A	250 V/2 A	230 V/3 A (690 VA)	230 V/3 A (690 VA) till max output C=14uF	1500 W	x	250 V/3 A	250 V/10 A
Type of load									
Contact material	AC13	AC14	AC15	DC1	DC3	DC5	DC12	DC13	DC14
AgSnO <sub>2</sub> contact 16 A	250 V/6 A	250 V/6 A	250 V/6 A	24 V/8 A	24 V/4 A	24 V/3 A	24 V/8 A	24 V/2 A	24 V/2 A





## SA3-02B/Ni\*, SA3-06M/Ni\*

Type of load	 $\cos \varphi \geq 0.95$								
Contact material	AC1	AC2	AC3	AC5a uncompensated	AC5a compensated	AC5b	AC6a	AC7b	AC12
AgNi contact 8 A	250 V/8 A	250 V/1.5 A	250 V/1 A	230 V/1.5 A (345 VA)	x	400 W	x	250 V/0.5 A	250 V/5 A
Type of load									
Contact material	AC13	AC14	AC15	DC1	DC3	DC5	DC12	DC13	DC14
AgNi contact 8 A	250 V/2 A	250 V/2 A	250 V/2 A	24 V/4 A	24 V/2 A	24 V/1.5 A	24 V/4 A	24 V/1 A	24 V/0.5 A

## SA3-06M/Ni\*, SA3-04M/Ni\*

Type of load	 $\cos \varphi \geq 0.95$								
Contact material	AC1	AC2	AC3	AC5a uncompensated	AC5a compensated	AC5b	AC6a	AC7b	AC12
AgNi contact 16 A	250 V/16 A	250 V/2.25 A	250 V/1.5 A	230 V/3 A (690 VA)	x	800 W	x	250 V/1 A	250 V/10 A
Type of load									
Contact material	AC13	AC14	AC15	DC1	DC3	DC5	DC12	DC13	DC14
AgNi contact 16 A	250 V/4 A	250 V/4 A	250 V/4 A	24 V/8 A	24 V/4 A	24 V/3 A	24 V/8 A	24 V/2 A	24 V/1 A








SA3-022M (RE1 - RE6, OUT1 - OUT2, RE11 - RE16, SHUTTER),  
EA3-022M (RE1 - RE6, OUT1 - OUT2, RE11 - RE16, SHUTTER),  
FA3-612M (FAN1 - FAN3, RE)

Type of load	 $\cos \varphi \geq 0.95$			
Contact material	AC1	AC3	AC15	DC1
AgNi contact 6 A	250 V/6 A	230 V/0.8 A	230 V/1.3 A	30 V/3 A 110 V/0.2 A 220 V/0.12 A













Demonstrated symbols are informative.

\*Products with AgNi contact only up on request for extra charge.



Load	bulbs, halogen bulbs	12–24 V low-voltage bulbs, coil transformers	12–24 V low-voltage bulbs, electric transformers	LEDs/LED strip*	energy-saving fluorescent tubes	control method	
							
	R	L	C	dimmable	dimmable	entering edge	trailing edge
DA3-22M	•	•	•	•	•	•	•
DA3-66M	•	•	•	•	•	•	•
DA3-03M/RGBW	-	-	-	•	-	-	-

Explanations

	<b>El. bulbs loads:</b> el. bulb, halogen light	(R)		Elektronic ballasts for fluorescent	(L)
	<b>Dimmer with defined load:</b> R - resistive, L - inductive, C - capacitive			<b>Inductive loads (transformers):</b> ferromagnetic and toroid transformers for lights with various voltage.	
	<b>Fluorescent light:</b> fluorescent lights uncompensated			<b>Switch:</b> switch - control contact of various device	
	<b>Fluorescent light:</b> fluorescent light compensated in series			<b>Button:</b> control button	
	<b>Fluorescent light:</b> fluorescent light compensated in parallel			<b>Control module:</b> analog control module 0 - 10 V	
	<b>Fluorescent light:</b> fluorescent light economical			Motor	

Category of use	Typical use
-----------------	-------------

AC current,  $\cos\phi = P/S$  (-)

<b>AC-1</b>	Non-inductive or slightly inductive load, resistance furnace. Includes all appliances supplied by AC current with power factor ( $\cos\phi$ ) $\geq 0.95$ . Examples of usage: resistance furnace, industrial loads.
<b>AC-2</b>	Motors with slip-ring armature, switching off.
<b>AC-3</b>	Motors with short-circuit armature, motor switching when in operation. This category applies to switching off motors with short-circuit armature while in operation. While switching, contactor switches current, which is 5 up to 7 times rated current of motor.
<b>AC-5a</b>	Switching of electrical gas-filled lights, fluorescent lights.
<b>AC-5b</b>	El. bulb switching. Enables low contact loading due to resistance of cold fiber is many times smaller than the one of hot fiber.
<b>AC-6a</b>	Switching of transformers.
<b>AC-7b</b>	Load of motors for home appliances.
<b>AC-12</b>	Switching of semiconductor loads with separation transformers.
<b>AC-13</b>	Switching of semiconductor loads with separation transformers.
<b>AC-14</b>	Switching of low electro-magnetic loads (max. 72 VA).
<b>AC-15</b>	Management of alternating electro-magnetic loads. This category applies to switching inductive loads with input for closed electro-magnetic circuit higher than 72 VA. Use: switching coils of contactors.

Note: Category AC 15 replaces formerly used category AC 11.

DC current,  $t = L/R$  (s)


<b>DC-1</b>	Non-inductive or low inductive load, resistive furnaces.
<b>DC-3</b>	Shunt motors: start-up, braking by backset, reversion, resistive braking.
<b>DC-5</b>	Series motor: start-up, braking by backset, reversion, resistive braking.
<b>DC-12</b>	Management of resistive loads and fixed loads with insulation by opto-electric element.
<b>DC-13</b>	Switching of electromagnets.
<b>DC-14</b>	Switching of electromagnetic loads in circuits with limiting resistor.



### 1) Surface mounted

Wall mounted in an installation box with spacing of 65 mm.


EST4	GSB3-40/S	WSB3-20H
EHT3	GSB3-60/S	WSB3-40
GBP3-60x	GSB3-90/S	WSB3-40H
GCR3-11	MSB3-40	
GCH3-31	MSB3-60	
GRT3-50	MSB3-90	
GSB3-40	GSP3-100	
GSB3-60	GMR3-61	
GSB3-80	IDRT3-1	
GSB3-90	WMR3-21	
GSB3-20/S	WSB3-20	

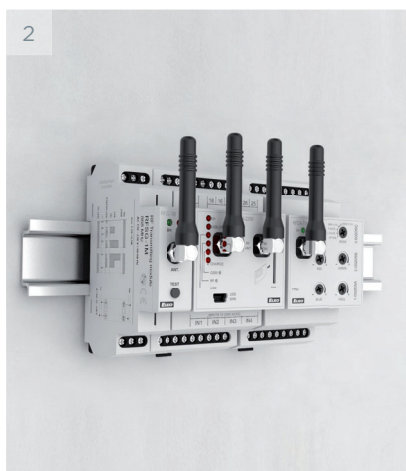

### 2) DIN Rail mounted

On DIN rail according to EN 60715.

ADC3-60M	LBC3-02M
CU3-07M	PS3-30/iNELS
DA3-66M	PS3-100/iNELS
DA3-22M	SA3-04M
DAC3-04M	SA3-06M
EMDC-64M	SA3-014M
FA3-612M	SA3-022M
IM3-140M	TI3-60M
IOU3-108M	
JA3-014M	

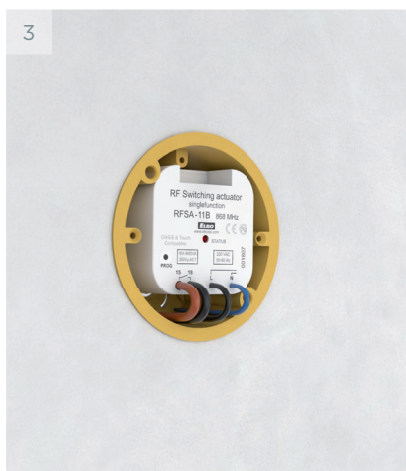

### 4) Mounted to or in the installation box

Mounted in an installation box or built into the device.

IM3-40B	SA3-01B
IM3-80B	SA3-02B
	TI3-40B



### 4) Mounted into the cover of appliance

SA3-01B
SA3-02B



**5) Surface mounted**

*Other attachment options.*


DLS3-1



**6) Ceiling mounting**


MCD3-01  
PMS3-01

1-MODULE

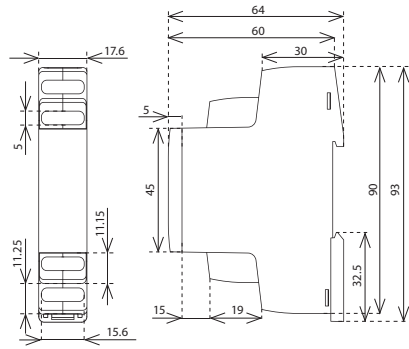


- BPS3-01M
- BPS3-02M
- CU3-07M
- CU3-08M
- CU3-09M/DALI
- CU3-10M
- iNELS Bridge

3-MODULE

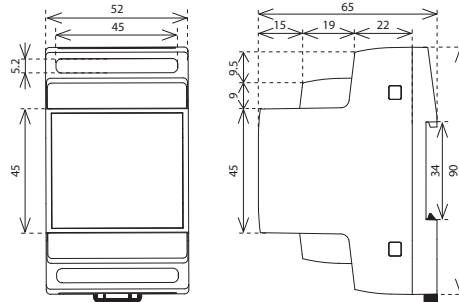


- ADC3-60M
- DA3-22M
- DAC3-04M
- EMDC-64M
- IM3-140M
- LBC3-02M
- PS3-30/iNELS
- SA3-04M
- SA3-06M
- TI3-60M
- DA3-03M/RGBW

6-MODULE

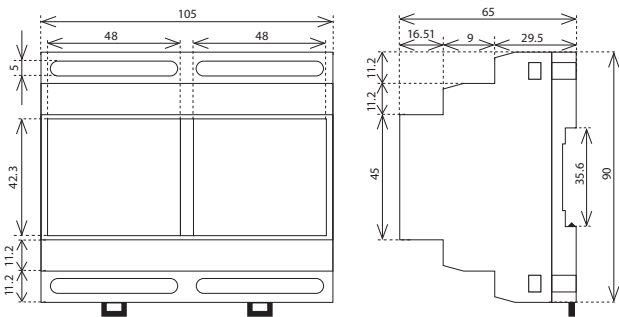

- DA3-66M
- EA3-022M
- FA3-612M
- IOU3-108M
- JA3-014M
- SA3-014M
- SA3-022M
- RC3-610M/DALI
- RC3-612M

BOX

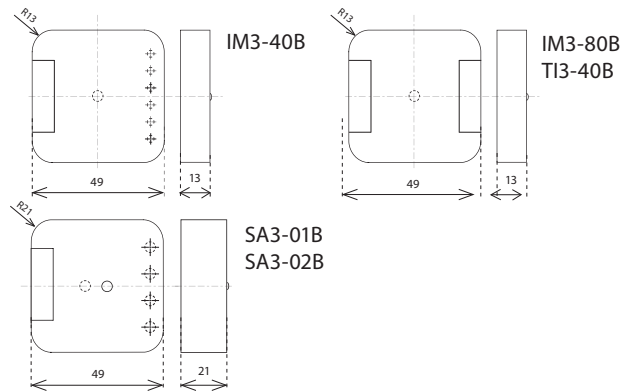


IM3-40B



IM3-80B  
TI3-40B

SA3-01B  
SA3-02B



PSM3

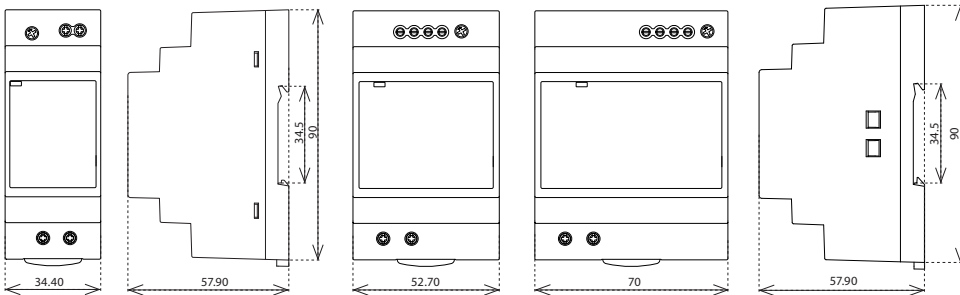

- PSM3-30
- PSM3-60
- PSM3-100




EST4













- WSB3-20
- WSB3-20H
- WSB3-40
- WSB3-40H
- WMR3-21

IDRT3-1

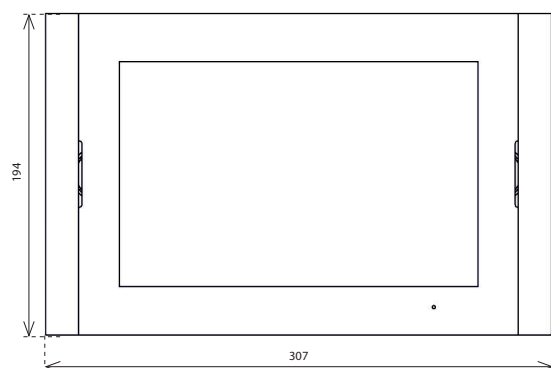

iNELS TOUCH iA10

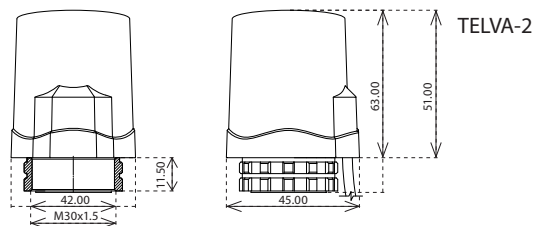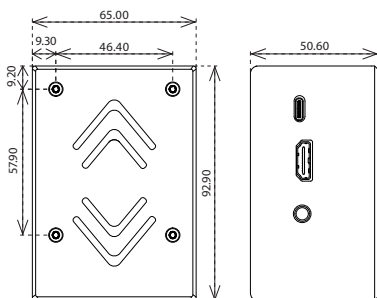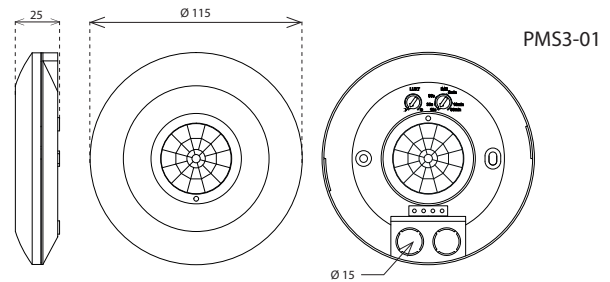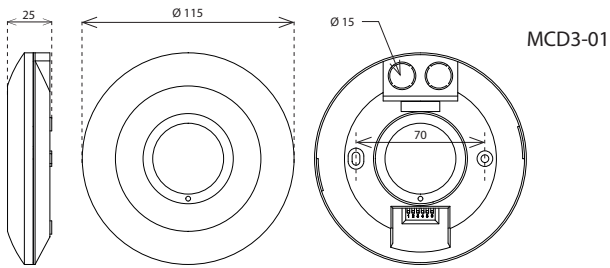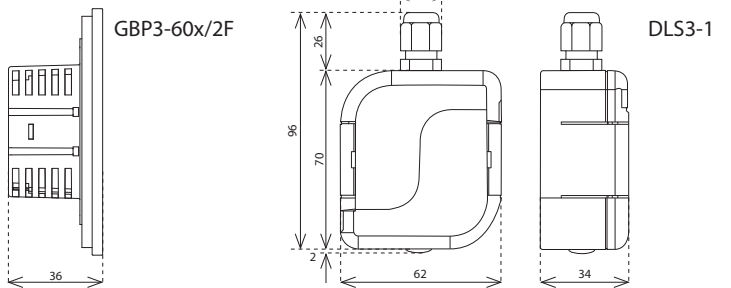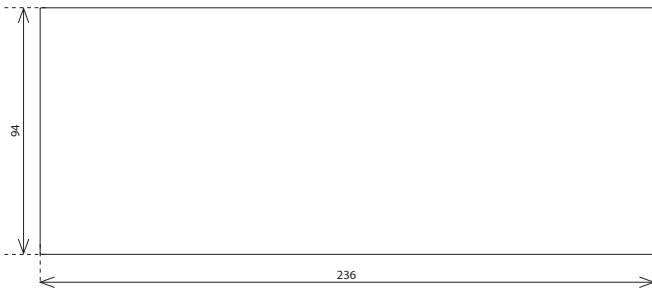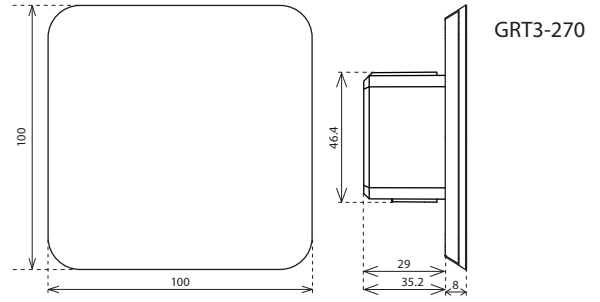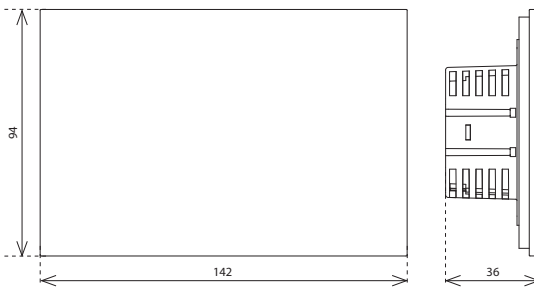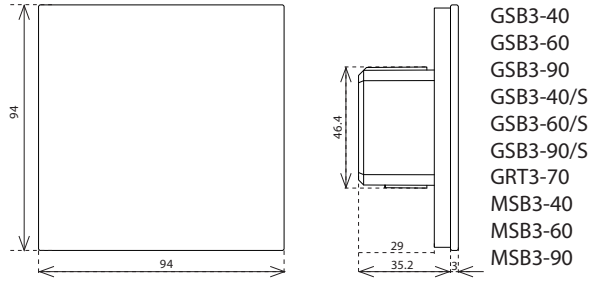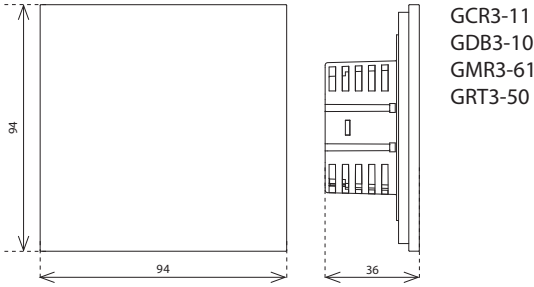



● **Headquarters**

ELKO EP Holding SE, Czech Republic

---

● **Europe**

ELKO EP Balkan d.o.o  
ELKO EP Bulgaria OOD  
ELKO EP Germany GmbH  
ELKO EP Hungary Kft.  
ELKO EP POLAND Sp. z o.o.  
ELKO EP SLOVAKIA, s.r.o.  
ELKO EP UK Ltd.  
ELKO EP UKRAINE LLC

● **Africa & Middle East**

ELKO EP Egypt LLC  
ELKO EP Kuwait Ltd.  
ELKO EP MEA LLC  
ELKO EP Saudi Arabia Ltd.  
ELKO EP South Africa PTY  
Ltd.

● **America**

ELKO EP North America LLC

---



**ELKO EP, s.r.o.** | Palackeho 493 | 769 01 Holesov, Vsetuly | Czech Republic  
phone: +420 573 514 221 | fax: +420 573 514 227 | elko@elkoep.com | www.elkoep.com

Published: 09/2023 | Modifications or amendments reserved | © Copyright ELKO EP, s.r.o. | 1<sup>st</sup> edition