CRM-121H | Multifunction time relay with galvanically separated control input

_c(Սլ

LISTED





EAN code CRM-121H/UNI: 8595188175555

Technical parameters	CRM-121H
Power supply	
Supply terminals:	A1 - A2
Voltage range:	AC/DC 12 - 240 V (AC 50-60 Hz)
Power input (max.):	2 VA/1.5W
Supply voltage tolerance:	-15 %; +10 %
Supply indication:	green LED
Time circuit	
Number of functions:	11
Time ranges:	50 ms - 30 days
Time setting:	rotary switch and potentiometer
Time deviation:*	5 % - mechanical setting
Repeat accuracy:	0.2 % - set value stability
Temperature coefficient:	0.01 %/°C, at = 20 °C (0.01 %/°F, at = 68 °F)
Output	
Number of contacts	1x changeover/SPDT (AgNi)
Current rating:	16 A/AC1; 1 HP 240 Vac, 1/2 HP 120 Vac; PD. B300
Breaking capacity:	4000 VA/AC1, 384 W/DC
Switching voltage:	250 V AC/24 V DC
Max. power dissipation:	1.2 W
Output indication:	multifunction red LED
Mechanical life:	10.000.000 ops.
Electrical life (AC1):	100.000 ops.
Control	
Control terminals:	S1-S2
Impulse length:	min. 25 ms/max. unlimited
Reset time:	max. 150 ms
Other information	
Operating temperature:	−20 +55 °C (−4131 °F)
Storage temperature:	−30 +70 °C (−22158 °F)
Dielectric strength:	4 kV AC (supply - output)
	4 kV AC (supply - control input)
Operating position:	any
Mounting:	DIN rail EN 60715
Protection degree:	IP40 from front panel/IP10 terminals
Overvoltage category:	Ш.
Pollution degree:	2
Max. cable size (mm ²):	solid wire max. 2x 2.5 or 1x 4/
	with sleeve max. 1x 2.5 or 2x 1.5 (AWG 12)
Dimensions:	90 x 17.6 x 64 mm (3.5″ x 0.7″ x 2.5″)
Weight:	72 g (2.5 oz.)
Standards:	EN 61812-1

* for adjustable delay <100 ms, a time deviation of \pm 10 ms applies

- Multifunction time relay for universal use in automation, control and regulation or in house installations.
- Galvanically separated control input (Power Trigger).
- All functions initiated by the supply voltage, except for the flasher function, can use the control input to inhibit the delay (pause).
- Mode selection according to the set function, permanently closed, permanently open, function of MEMORY LATCH with delay.
- Time scale 50 ms 30 days divided into 10 ranges.
- Multifunction red LED flashes or shines depending on the operating status.

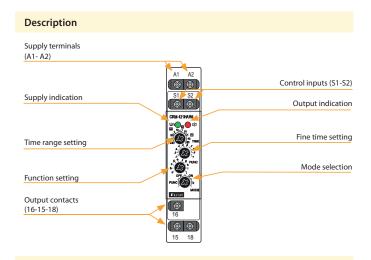

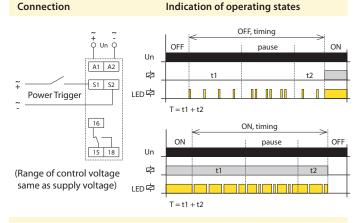

Mode selection

FUNC. Settings function mode

The desired function a-j is set with the FUNC rotary switch.

OFF. Output contact open mode



ON. Output contact closed mode



k. Function: MEMORY LATCH with delay



When the supply voltage is applied, the relay is open. If the control contact is closed, the relay closes and the time delay T starts. It does not matter the length of the control pulse. When the timing is complete, the relay opens. If the control contact is closed during timing, the relay opens immediately. Each time the control contact closes during relay timing, it changes status.